
property owner in order to ensure performance of the detail. As with any surface-mounted termination, the vertical substrate above the seal must be waterproofed and maintained by the

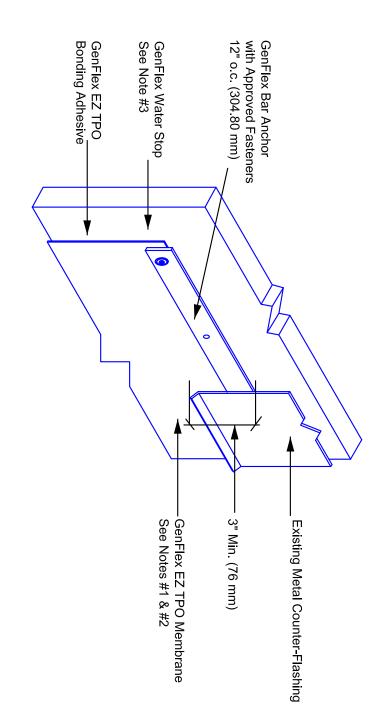

- N → Vertical substrate must be clean and suitable for flashing.
- Alternate flashing substrates may be installed over existing vertical substrates if grade plywood and 22 ga (0.76 mm) G-90 galvanized steel. Securement must be Examples of alternate substrates are: 1/2" (13 mm) minimum thickness exterior conditions prevent the substrate from meeting GenFlex flashing requirements. achieved with corrosion resistant fasteners and be sufficient to resist 125 lb (556.03 N) of pullout pressure per square foot.
- ယ For compression details that utilize GenFlex Water Stop, the substrate must be bared in the compression area down to either a masonry or metal surface.

ISSUE / REVISION DATE: MAXIMUM WARRANTY: 10/20 Years DETAIL NO.

10-26-2015

EZ-1.02

Termination Bar with Counter-Flashing

ACCEPTABLE SYSTEMS:

EZ TPO Systems

Roofing Systems

NOT TO SCALE