


1. Metal work must be fabricated and installed in accordance with SMACNA and NRCA recommendations and include continuous metal cleats where applicable. Metalwork will completely enclose roof assembly ends and extend below the wood nailer face.
2. Wood nailers are to be secured to the structural steel members as required to resist 200 lb (889.6 N) minimum of pullout force per linear foot.
3. Additional metalwork may be required to effectively seal off the roof edge to prevent wind, birds, and pests from entering roof assembly.
4. Metalwork may be fabricated from SMACNA approved material and stripped-in with TPO Cover Tape set in Primer or GenFlex EZ TPO Coated Metal with a fully hot air welded strip-in application of TPO Field Membrane with edges sealed.

\*NOTE: This assembly does not meet Factory Mutual Rating Criteria.

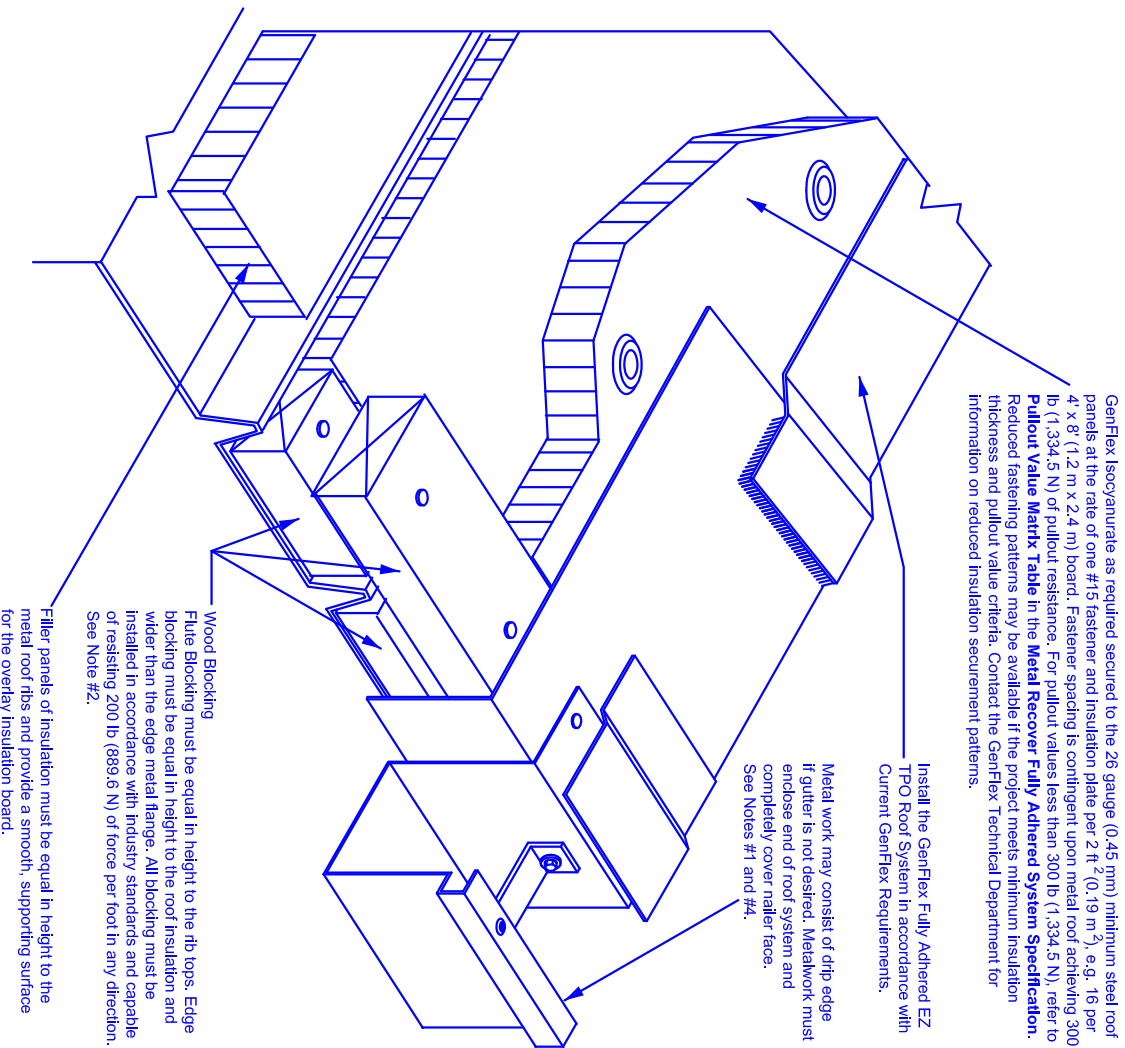

### Metal Edge Flashing

EZ TPO Systems

ACCEPTABLE SYSTEMS:  
Metal Building Recover

MAXIMUM WARRANTY: **15 Years**

ISSUE / REVISION  
DATE:

10-27-2015

DETAIL NO.

EZ-S-14.01

NOT TO SCALE

