


**NOTE:**

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. HOLE IN MEMBRANE SHOULD EXTEND A MINIMUM OF 1/2" (13 mm) BEYOND CLAMPING RING AND SHOULD NOT BE SMALLER THAN THE DIAMETER OF THE LEADER PIPE.
3. INSULATION ADJACENT TO DRAIN TO BE APPROPRIATE GENFLEX INSULATION WITH APPROPRIATE BONDING SURFACE.
4. GENFLEX WATER STOP MIN 1/2 OF 10 OZ. (295 ml) TUBE PER 4" DRAIN. USE ADDITIONAL WATER STOP FOR LARGER DRAINS.
5. IN RE-ROOF APPLICATIONS:  
 -REMOVE EXISTING FLASHING DOWN TO METAL BOWL.  
 -REPAIR OR REPLACE BROKEN DRAINS COMPONENTS.  
 -DRILL AND TAP BROKEN DRAINS BOLTS AND REPLACE IF NECESSARY.
6. REFER TO DETAIL EZT-FB-LS-01 OR EZT-FB-LS-03 FOR WELD WIDTH.
7. FASTENERS AND SEAM PLATES REQUIRED TO ISOLATE DRAIN TARGET IN MECHANICALLY ATTACHED SYSTEMS.

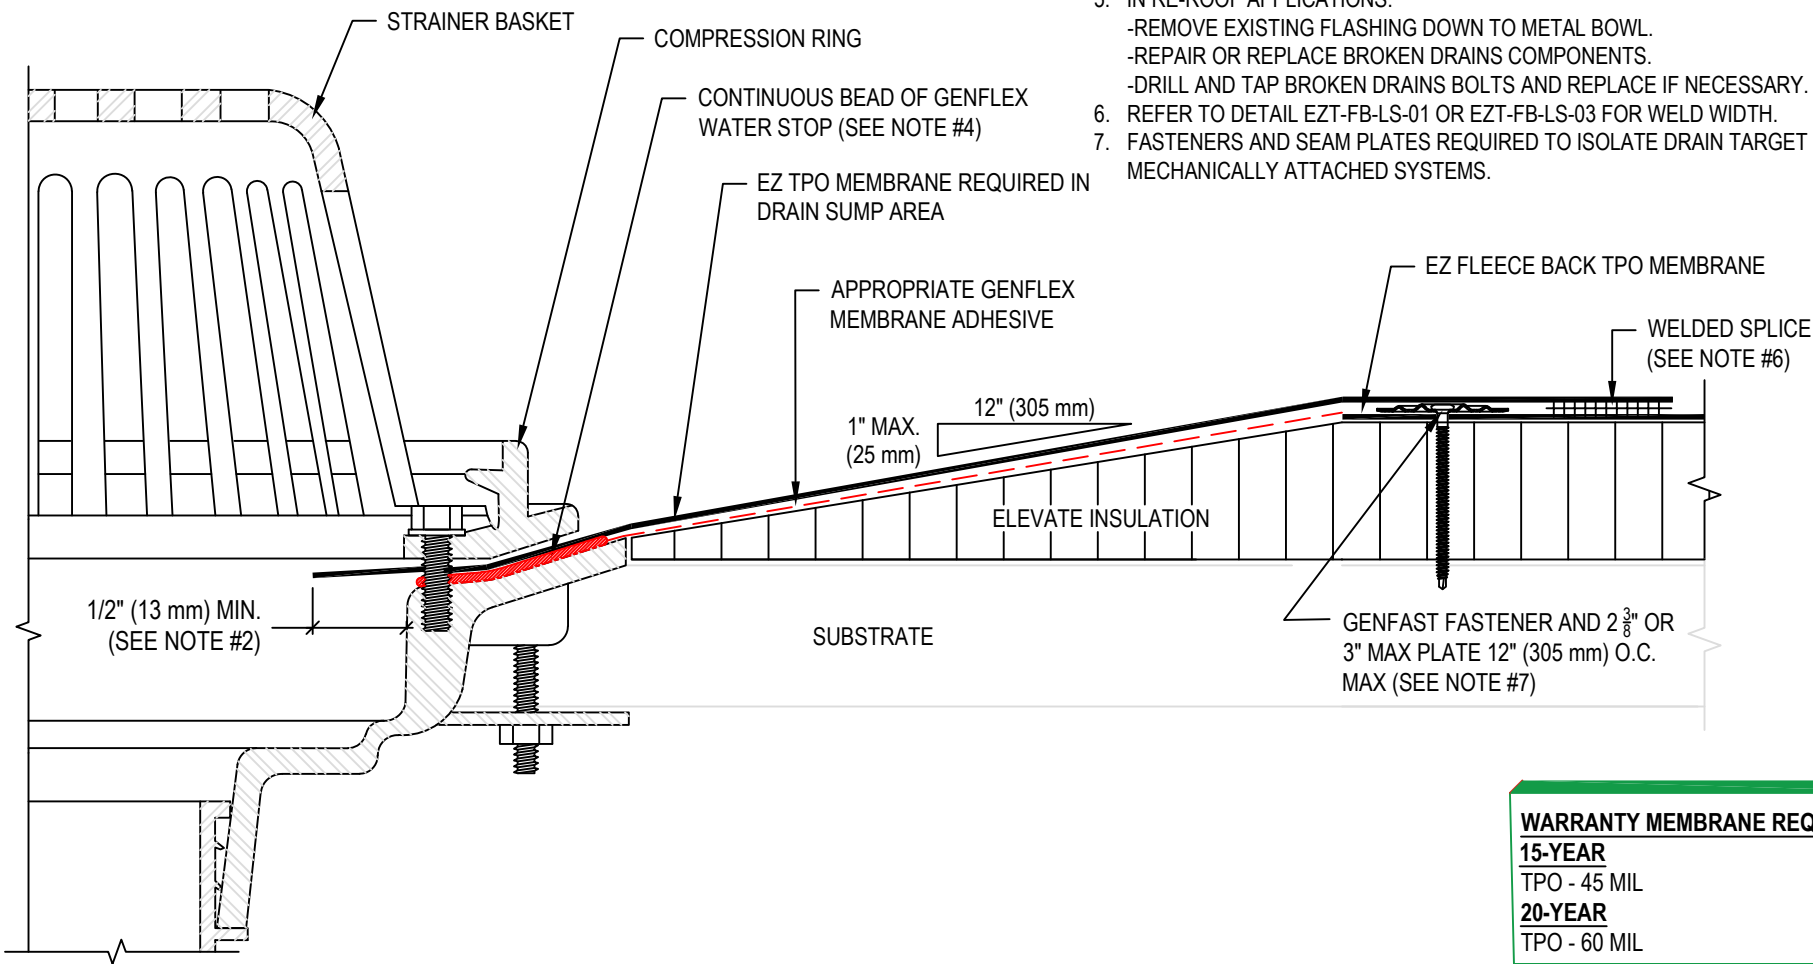

**WARRANTY MEMBRANE REQUIREMENTS:**

**15-YEAR**  
 TPO - 45 MIL  
**20-YEAR**  
 TPO - 60 MIL



**ROOF DRAIN (TARGET PATCH REQUIRED)  
 EZ FLEECE BACKED TPO MECHANICALLY ATTACHED SYSTEM**

MATERIAL: EZ FLEECE BACKED TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION  
 DATE:

04/20/2026

DETAIL NO.

**EZT-FB-D-02**

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com