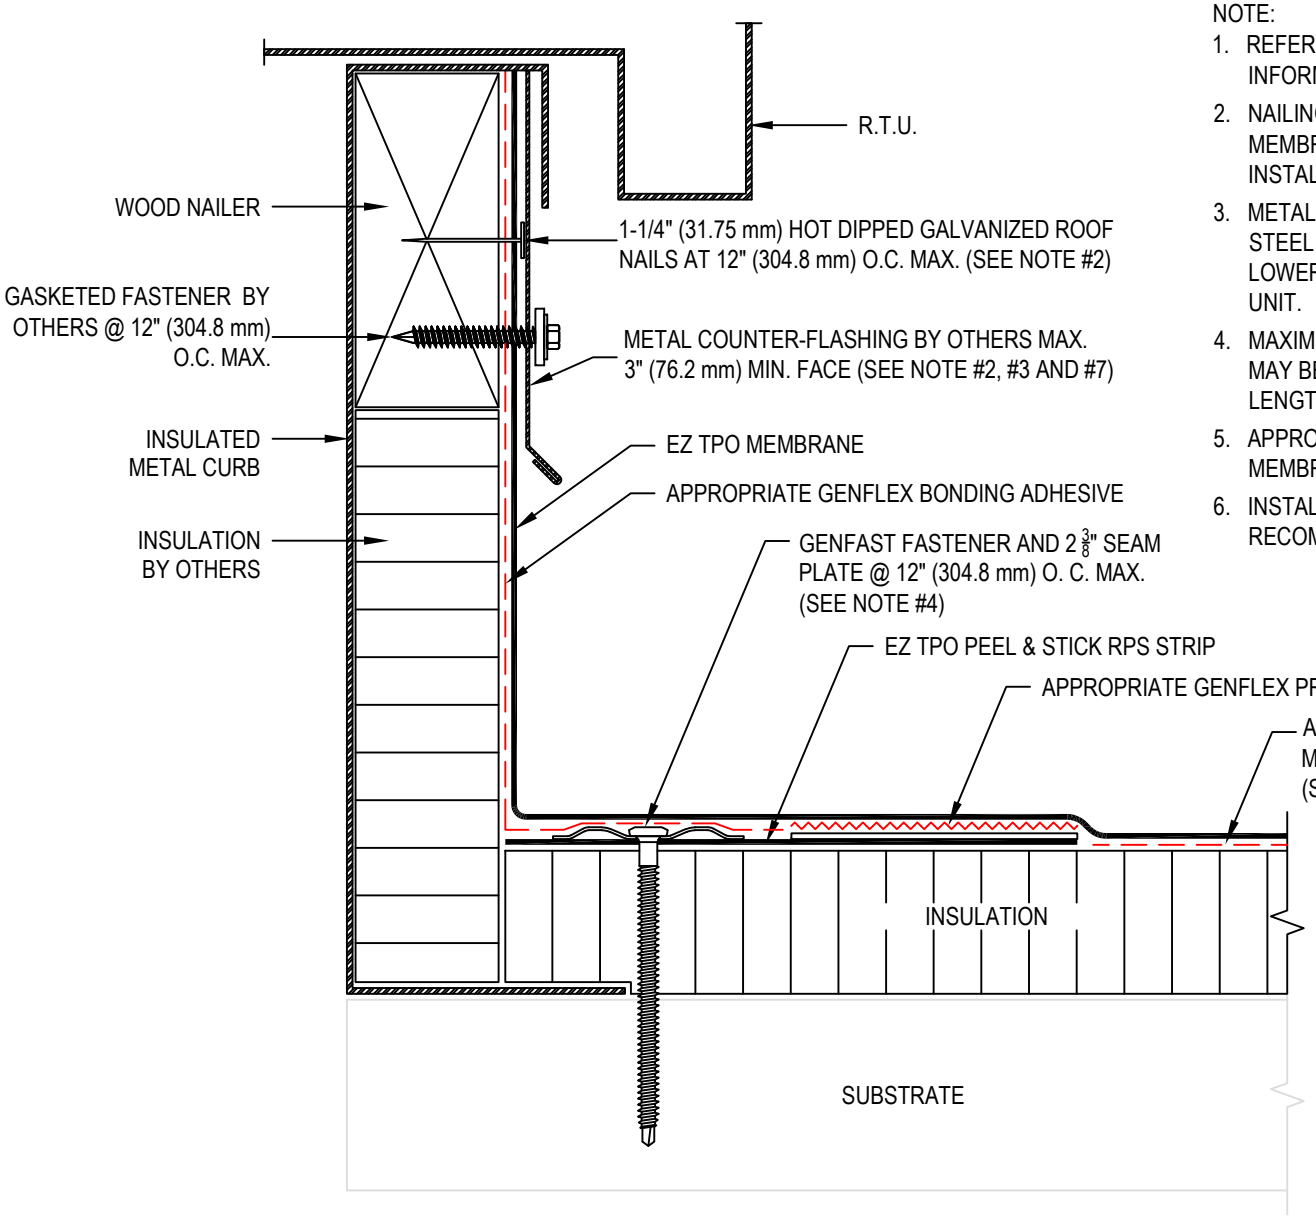

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. NAILING AND METAL COUNTER-FLASHING ARE NOT REQUIRED IF MEMBRANE EXTENDS UP AND OVER CURB WALLS PRIOR TO INSTALLATION OF R.T.U.
3. METAL COUNTER-FLASHING SHALL BE 24 GAUGE PRE-FINISHED STEEL OR .032" (0.81 mm) MIN. ALUMINUM FORMED WITH HEMMED LOWER EDGE MOUNTED TIGHTLY TO UNDERSIDE OF MECHANICAL UNIT.
4. MAXIMUM 10" (254 mm) LONG FASTENERS. (NOTE: WOOD BLOCKING MAY BE SUBSTITUTED FOR INSULATION TO REDUCE FASTENER LENGTH REQUIREMENT).
5. APPROPRIATE GENFLEX MEMBRANE ADHESIVE REQUIRED BETWEEN MEMBRANE AND INSULATION FOR ADHERED SYSTEMS.
6. INSTALL METAL WORK IN ACCORDANCE WITH CURRENT SMACNA RECOMMENDATIONS.

WARRANTY MEMBRANE REQUIREMENTS:

15-YEAR
TPO - 45 MIL

20-YEAR
TPO - 60 MIL

GENFLEX Roofing Systems

TERMINATION AT R.T.U. WITH COUNTER-FLASHING AND EZ TPO PEEL & STICK RPS (UNIT FLANGE MOUNTED TO SUBSTRATE)

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE: 04/20/2026

DETAIL NO. EZT-T-17

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE