


- NOTE:
- 1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION
 - 2. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES.
 - 3. APPROPRIATE GENFLEX MEMBRANE ADHESIVE REQUIRED BETWEEN MEMBRANE AND INSULATION FOR ADHERED SYSTEMS.
 - 4. GENFLEX ROOF PAVER (MIN. 10 lb (4.5 KG) PER SQ.FT.) INSTALLED OVER PROTECTION LAYER REQUIRED FOR BALLASTED SYSTEMS ONLY.
 - 5. APPLY EDGE CAULK AROUND ENTIRE PERIMETER OF FLASHING. REFER TO LS-09 FOR SEAM EDGE TREATMENT.
 - 6. EXISTING GRAVEL SURFACE, IRREGULARITIES, MOISTURE, ETC. MUST BE REMOVED FROM EXISTING ASPHALT SYSTEM MEMBRANE PRIOR TO TIE-IN.
 - 7. REFER TO BT-24 FOR ADDITIONAL REQUIREMENTS FOR METAL ROOF DECKS.
 - 8. BATTEN STRIP MAY BE USED IN LIEU OF 2" (50.8 mm) METAL PLATES FOR MAS AND ADHERED SYSTEMS ONLY. REFER TO "BT" DETAILS FOR SPECIFIC BASE TIE-IN INFORMATION, REQUIREMENTS, AND OPTIONS. METAL BATTEN REQUIRED FOR 20 YEAR WARRANTIES.
 - 9. WHEN A CHANGE IN ELEVATION OCCURS BETWEEN SYSTEMS, USE APPROPRIATE TAPERED INSULATION TO CREATE A SMOOTH TRANSITION.
 - 10. GENFLEX DOES NOT WARRANTY TIE-INS TO OTHER ROOFING SYSTEMS. THIS DETAIL INCLUDES TERMINATION OF THE GENFLEX SYSTEM ONLY.

WARRANTY MEMBRANE REQUIREMENTS:
UP TO 15-YEAR: 45 mil
UP TO 20-YEAR: 60 mil

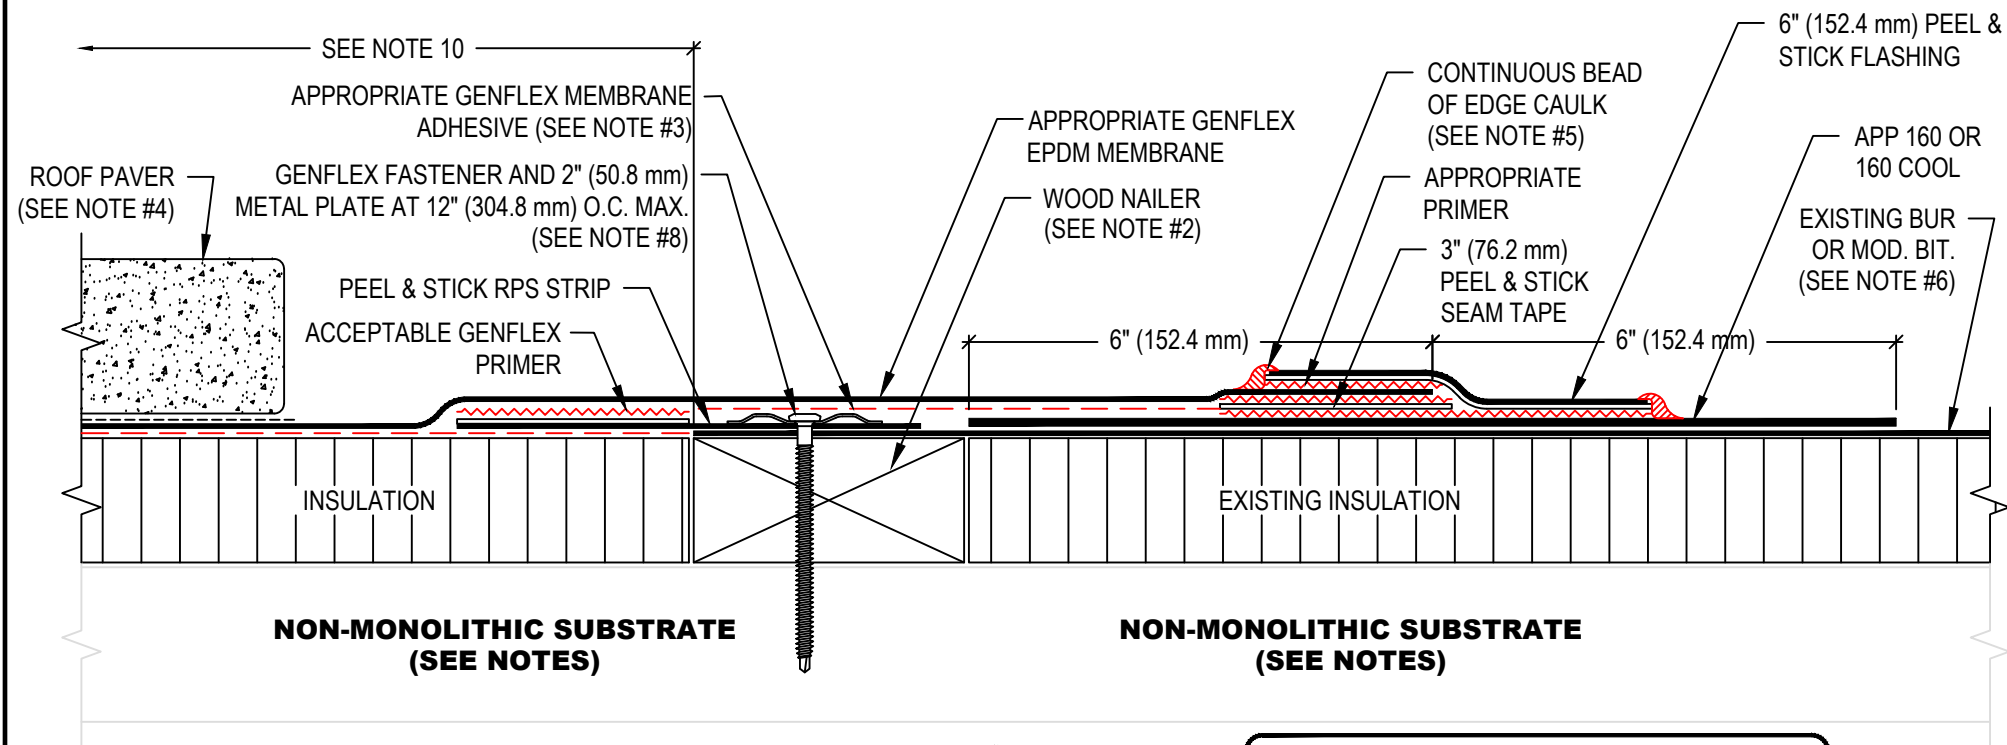

**TIE-IN TO EXISTING ROOF SYSTEMS NOT
WARRANTED BY GENFLEX**

**EXTREME CARE SHOULD BE TAKEN
WHEN TORCHING APP MEMBRANE
NEAR FLAMMABLE MATERIALS**



**TIE-IN EPDM SYSTEM TO EXISTING ASPHALT SYSTEM
(NON-MONOLITHIC SUBSTRATE)**

MATERIAL: EPDM

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: SEE TABLE

ISSUE / REVISION
DATE:

05/01/2026

DETAIL NO.

BT-23

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE