

GenFast™ Metal Bar Anchor

DESCRIPTION

GenFast™ Metal Bar Anchors are used for the mechanical attachment of the EPDM and TPO membranes in mechanically attached roofing systems. They can also be used to attach membrane at the perimeter of the building and around penetrations per current GenFlex Technical Specifications.

PHYSICAL PROPERTIES

PROPERTY	MINIMUM PERFORMANCE
Metal	Galvanized G-90
Length	10' (3 m) Min.
Thickness	16 Gauge Min.
Holes	Pre-Punched 6" (152 mm) o.c.
Hole Diameter	1/4" (6 mm) Diameter
Edges	All Edges are Deburred
Bar Width	1" (25 mm) Wide
Ends	Rounded to a 1/2" (13 mm) Radius

INSTALLATION


Since this bar is used in many applications, consult the appropriate GenFlex specification for specific installation procedures.

PRODUCT DATA

QUANTITY	PRODUCT #
50 bars per tube	W590010073

LEED INFORMATION

Recycled Content	
Post Consumer	0%
Post Industrial	0%

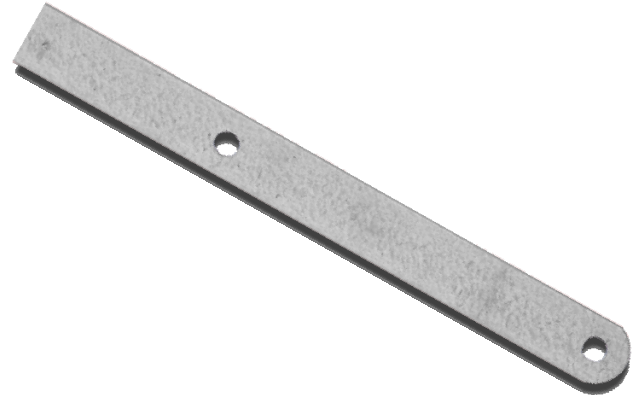

STORAGE

Bar Anchors should be stored in unopened containers protected from moisture and kept dry at all times. If stored out of doors, place on skids in a dry area and cover with a breathable tarp.

SHELF LIFE

Not applicable

PRECAUTIONARY DATA

Eye protection is recommended when installing fasteners and plates.

Metal Anchor Bars are manufactured from galvanized metal. Precautions should be taken to avoid metal slivers, etc.

Refer to Material Safety Data Sheet for additional information.