


Refer to SMACNA for pourable sealer pocket
 Fabrication Directions - Must be sized to provide
 1" (25 mm) of clearance between penetrations
 and between penetrations and sides of pocket.
 Job site conditions may require that the pocket
 be assembled onsite due to fixed, continuous
 penetrations.



If pourable sealer pocket is constructed with welded or solid soldered corners, flashing only has to cover the flange. It can be either TPO Reinforced Flashing or TPO Cover Tape. In either case, the flashing material must be edge caulked on all edges.

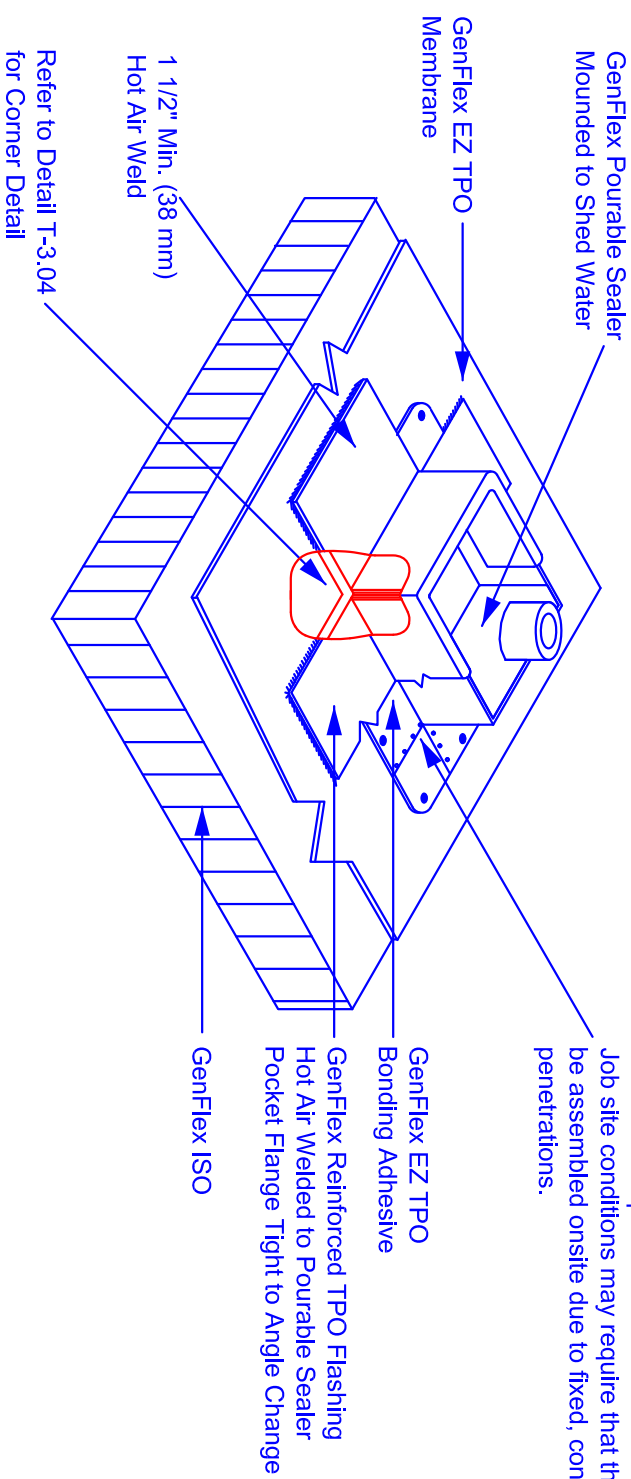

Pourable Sealer Pocket Formed with Uncoated Metal
 EZ TPO Systems
 ACCEPTABLE SYSTEMS:
 All

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
 DATE:
 10-27-2015
 NOT TO SCALE

**DETAIL NO.
 EZ-9.02**