

TPO PREMOLDED INSIDE AND OUTSIDE CORNER


Item Description

TPO Corners

White
Grey
Tan

Item Number

W590030083
W590030084
W590030103

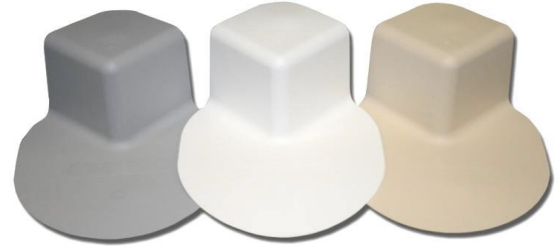

Product Information

Description

GenFlex TPO Premolded Inside and Outside Corner is an injection-molded TPO component made from non-reinforced thermoplastic polyolefin and is specifically designed to be installed in roofing applications for flashing inside and outside corners.

The TPO Corner must be field cut on the appropriate guidelines into either an inside or outside corner prior to installation using standard heat welding equipment and techniques.

Typical Properties		
Property	Test Method	Typical Values
Color	---	White, Grey, Tan
Thickness	ASTM D 638	0.070" (1.8 mm)
Tensile Strength	ASTM D 638	1780 psi (12.3 MPa)
Elongation at Break	ASTM D 638	750%
Tear Resistance	ASTM D 1004	11 lbf (49 N)
Brittleness Point	ASTM D 2137	-40 °F (-40 °C)
Dimensional Stability	ASTM D 1204	± 0.3%

Installation

Refer to current GenFlex Technical Specifications for additional instructions.

IMPORTANT: Ensure the receiving surfaces are free of debris and no moisture is present.

1. Substrate must be clean, dry smooth, free of sharp edges, fins, loose, or foreign materials, oil, grease, and other materials which may damage the flashing.
2. All roughened surfaces which could damage the flashing shall be repaired as specified to offer a smooth substrate.
3. **All surface voids greater than ¼" (6.35 mm) wide, including reinforced TPO membrane and field sheets, shall be properly filled with like material.**
4. Install corners using a handheld welding tool and standard welding techniques.

Product Data	
Property	Value
Overall Size	6" (150 mm) x 8" (200 mm)
Corner Size	3" x 3" x 3.25" (75 mm x 75 mm x 83 mm)
10 Units per Carton	1780 psi (12.3 MPa)

***LEED® Information**

Recycled Content

Post Consumer 0%
 Post Industrial 0%

*NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

Storage

- Store in original unopened container in a dry location indoors at temperatures between 60 °F (16 °C) and 80 °F (27 °C) free from damage or contamination.
- Do not store on roof in direct sunlight or at temperatures above 100 °F (38 °C). When exposed to lower temperatures, restore to room temperature prior to use.
- Keep material dry at all times prior to installation.

Precautionary Data

- Take care when moving, transporting, and handling, etc., to avoid sources of punctures and physical damage or contamination.
- Contact the GenFlex Technical Department for recommendations on installation of TPO components using standard heat welding equipment and techniques.
- Refer to Safety Data Sheet for additional information.

Please contact GenFlex Technical Services at 1-800-443-4272 option 1, for further information.

This sheet is meant to highlight GenFlex products and specifications and is subject to change without notice. GenFlex takes responsibility for furnishing quality materials which meet published GenFlex product specifications. Neither GenFlex nor its representatives practice architecture. GenFlex offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. GenFlex accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No GenFlex representative is authorized to vary this disclaimer.