


1. All wood nailers to be approved treated material. Attachment of wood nailer to be accomplished by using fasteners providing no less than 200lb (556 N) of pullout. Fasteners shall be spaced no greater than 12' (305 mm) o.c.
2. Apply GenFlex Water Stop 1" (25 mm) in from roof edge prior to mounting Cleat / Termination Metal Bar at the rate of 15 linear feet (4.6 m) per tube.
3. Secure Cleat / Termination Bar at roof edge through membrane into nailer with provided 1 5/8" (41 mm) Corrosion Resistant Fasteners spaced at 12" o.c. (305 mm) through pre-punched slots in bar.



Section View

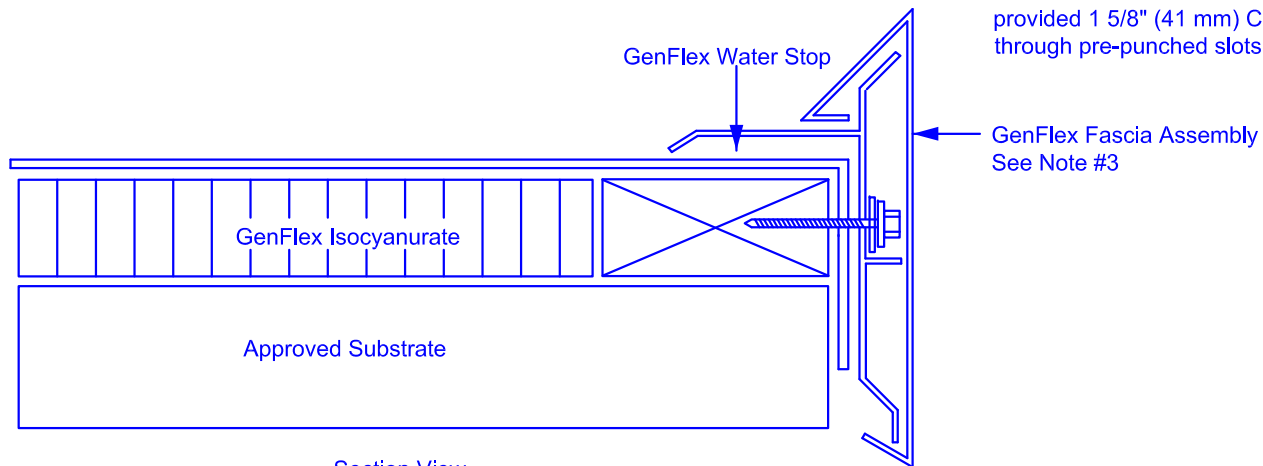

**Fascia Edge Metal**

EPDM Systems

ACCEPTABLE SYSTEMS:  
All Systems

MAXIMUM WARRANTY: **20 Years**

ISSUE / REVISION  
DATE:  
6-25-2015

DETAIL NO.

**E-14.12**

NOT TO SCALE