




Standard Ballasted Assembly

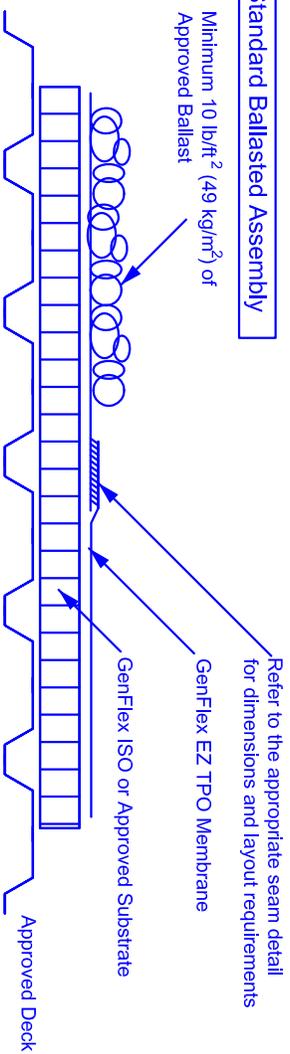

IRMA Assembly

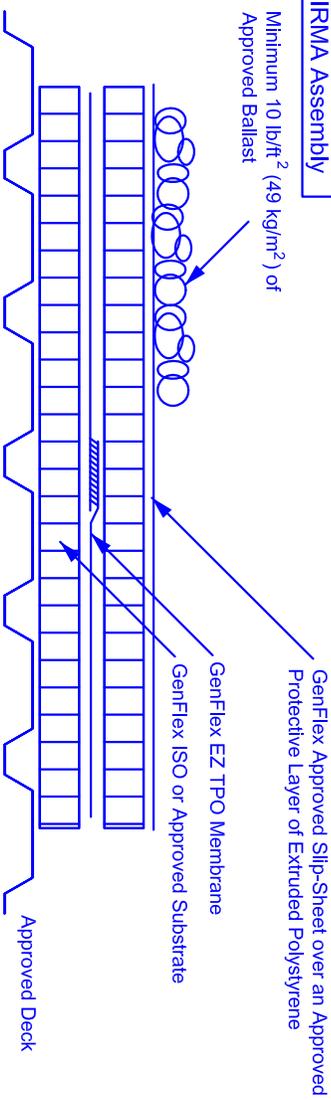

Paver Ballasted Assembly

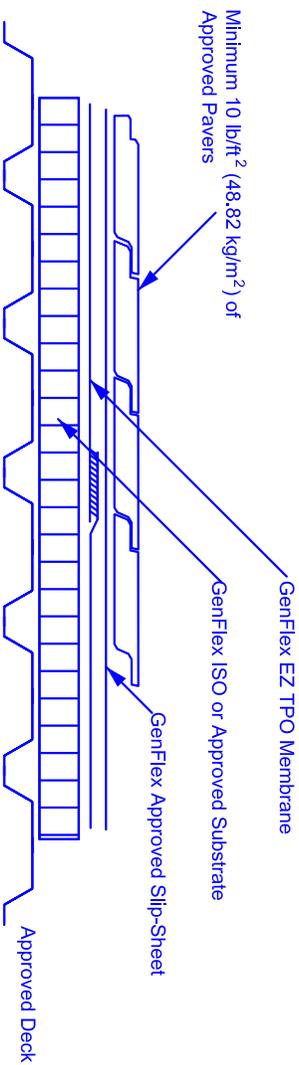

NOTE: Position insulation with board ends resting on the top flutes.

The property owner's design professional must ensure that the structure is sound and capable of supporting the intended roof system. Care must be taken when installing a ballasted roof system to prevent overloading the deck during ballasting operations. If the ballasted roof is installed in a high wind area and mechanical securing of the insulation is specified by the roof system designer, contact the GenFlex Technical Department to discuss securing requirements.



Insulation Placement and Cross Section

EZ TPO Systems

ACCEPTABLE SYSTEMS:
Ballasted

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

10-27-2015

DETAIL NO.

EZ-S-40.02

NOT TO SCALE