


GenFlex Bar Anchor Secured with GenFlex Fasteners Spaced According to the Mechanically Attached TPO Code Matrix



Position insulation and membrane sheets to enable securement into the top flutes on steel decks to ensure positive attachment and to reduce fastener movement. Insulation should be installed with board ends resting on the flute tops.

Refer to Detail T-6.03 for seam specifications.

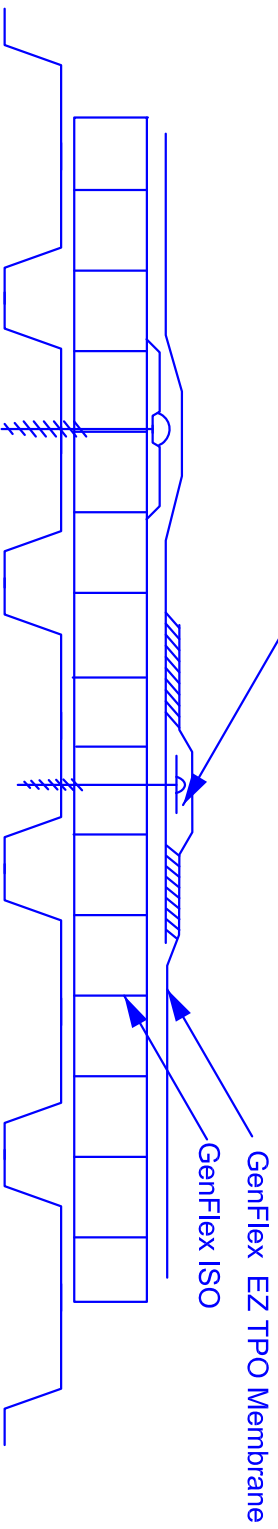

**Dual Weld Seam Insulation Cross Section**

EZ TPO Systems

ACCEPTABLE SYSTEMS:  
Mechanically Attached Systems

**MAXIMUM WARRANTY: 20 Years**

ISSUE / REVISION  
DATE:

6-18-2015

DETAIL NO.

EZ-S-42.02DW

NOT TO SCALE