

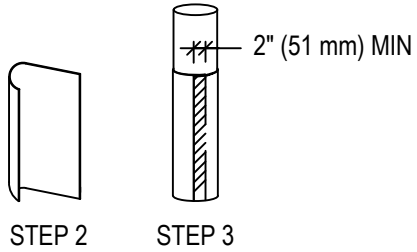


ULTRAFLASH FABRIC

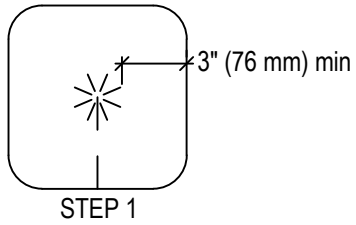

NOTE:

1. REFER TO GENFLEX WEBSITE FOR MOST CURRENT INFORMATION.
2. PRIME ALL SURFACES WITH APPROVED PRIMER.
3. ONE-PART POURABLE SEALER SHOULD BE APPLIED WITH A BOTTOM COAT OF 30 MIL WET THICKNESS AND A TOP COAT OF 30 MIL WET THICKNESS.
4. FOR MECHANICALLY-ATTACHED SYSTEMS WHERE MEMBRANE FASTENERS ARE AT THE BASE OF A WALL, CURB, OR PENETRATION, THE LIQUID FLASHING MEMBRANE (INCLUDING FABRIC) MUST EXTEND 3" (76 mm) PAST THE EDGE OF THE FASTENERS/PLATES.

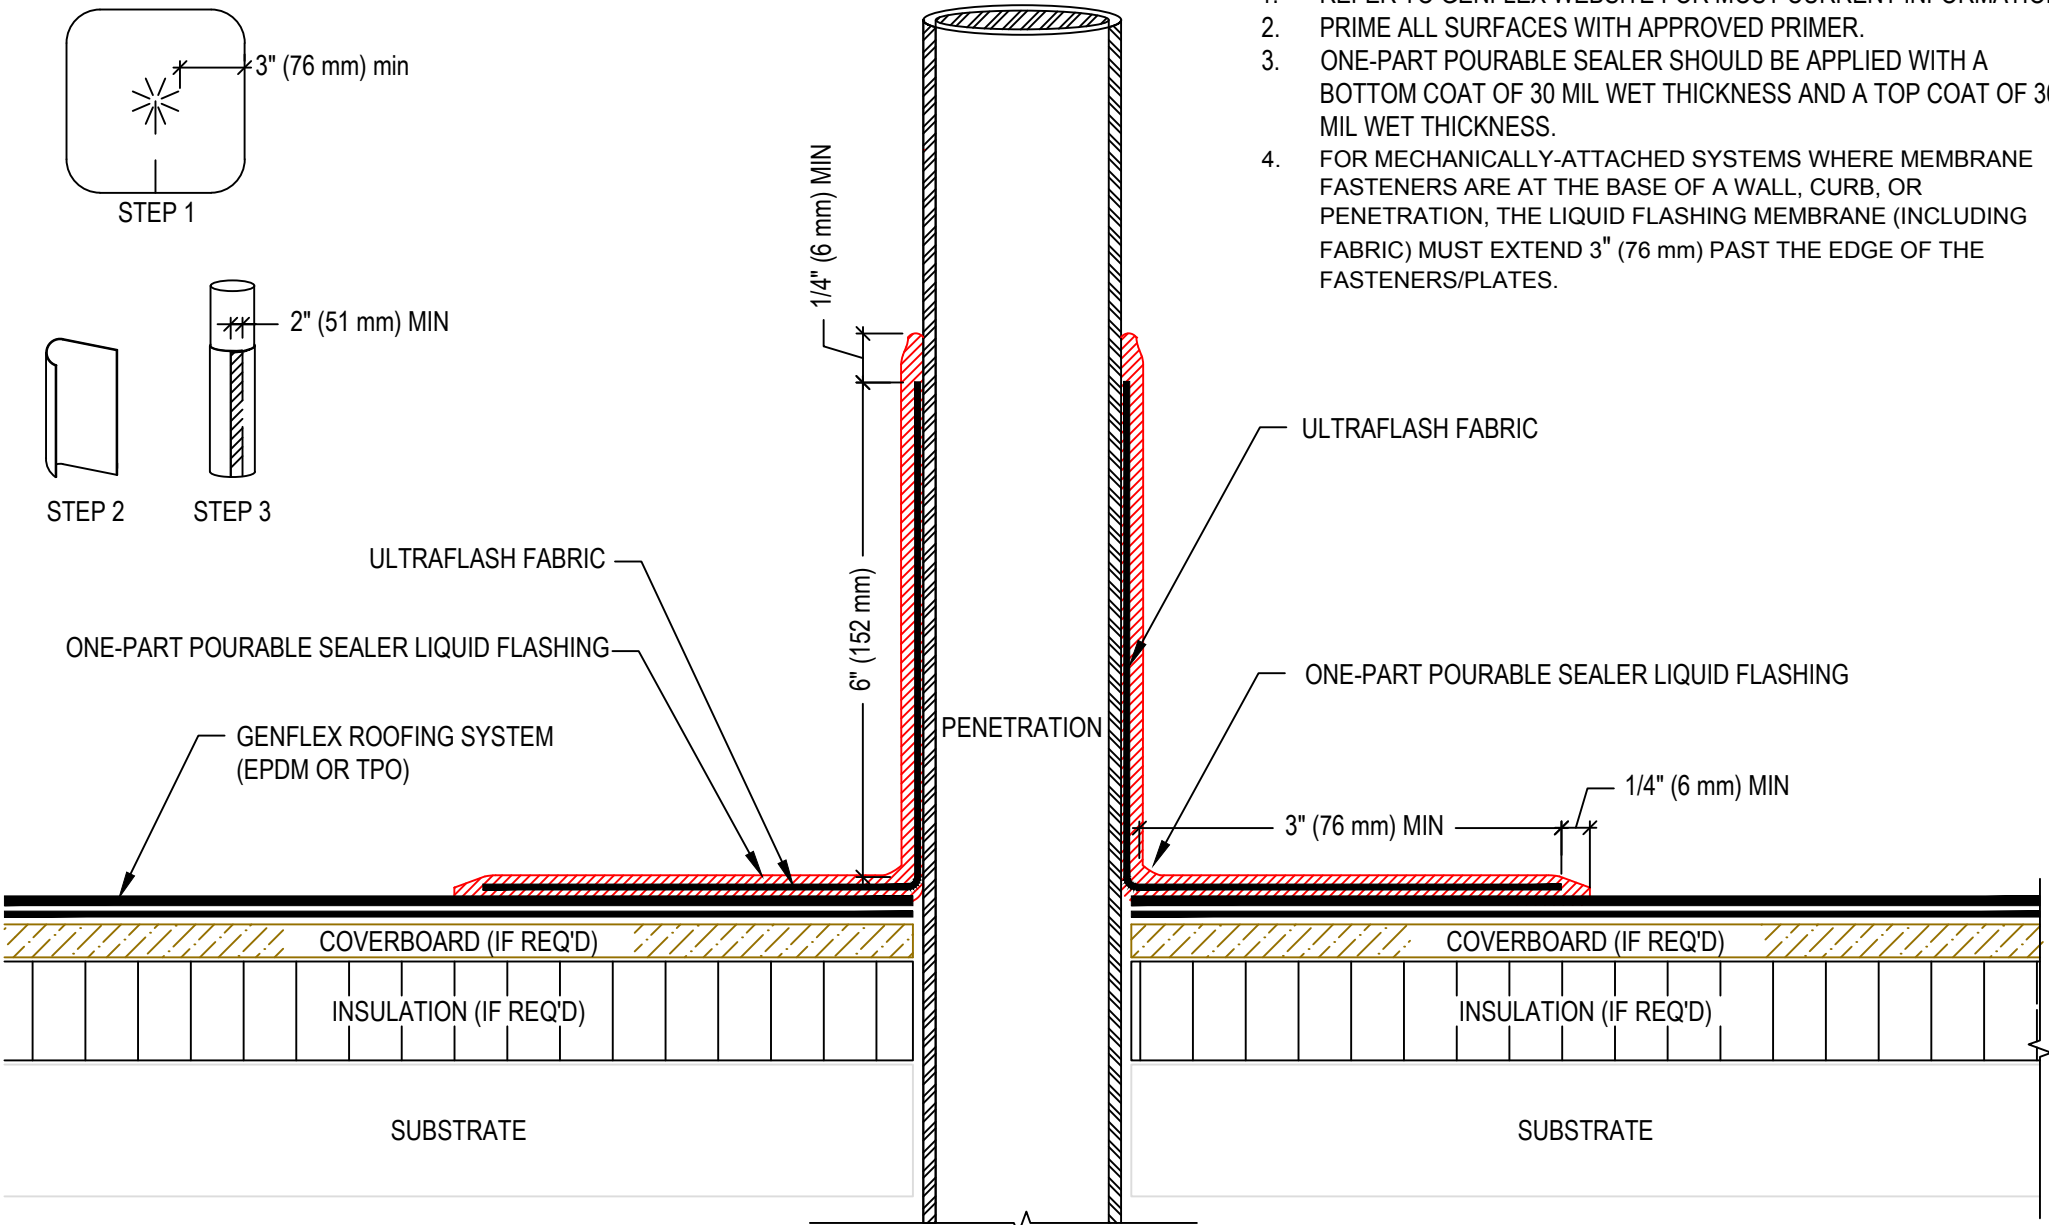

**ONE-PART POURABLE SEALER
PIPE FLASHING**

GENFLEX™

ACCEPTABLE SYSTEMS: **TPO, EPDM**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:
08/15/2019

DETAIL NO.
PS-P-1