


WALL/CURB ATTACHMENT

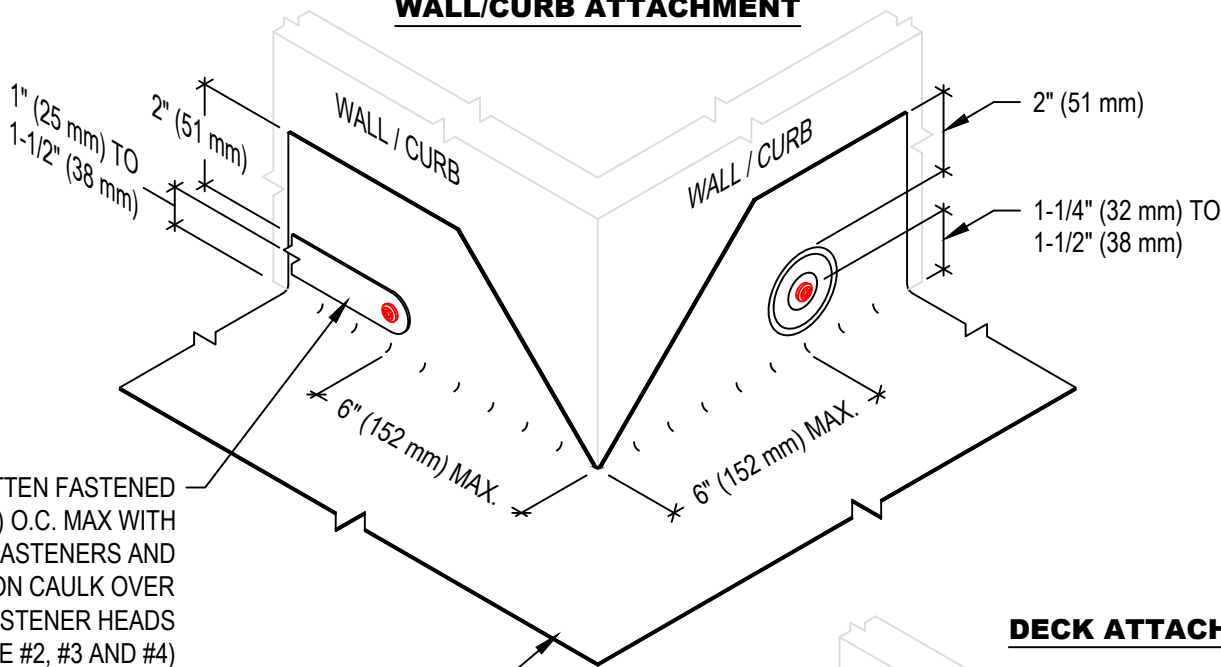


GENFAST BATTEN FASTENED
12" (305 mm) O.C. MAX WITH
GENFAST FASTENERS AND
TERMINATION CAULK OVER
FASTENER HEADS
(SEE NOTE #2, #3 AND #4)

SEAM2SEAM EPDM MEMBRANE

**BASE FLASHING AND
TERMINATION NOT SHOWN
FOR CLARITY. REFER TO
APPROPRIATE TERMINATION
& BASE TIE-IN DETAILS**

**THIS DETAIL IS FOR LAYOUT
PURPOSE ONLY AND IS
NON-SPECIFIC. REFER TO
APPROPRIATE BASE TIE-IN
DETAILS FOR SYSTEM SPECIFIC
SECUREMENT OPTIONS**

DECK ATTACHMENT

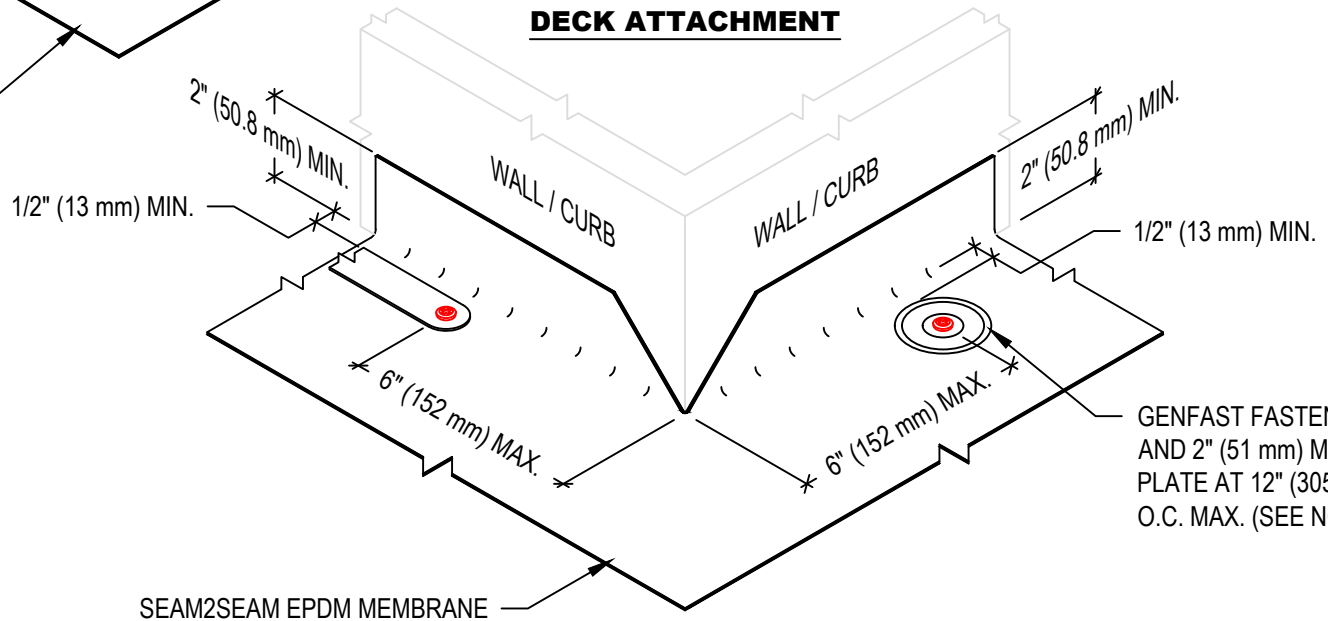

SEAM2SEAM EPDM MEMBRANE

GENFAST FASTENERS
AND 2" (51 mm) METAL
PLATE AT 12" (305 mm)
O.C. MAX. (SEE NOTES)

NOTE:

1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
2. MAXIMUM 6" (152 mm) LONG FASTENERS. (NOTE: WOOD BLOCKING MAY BE SUBSTITUTED FOR INSULATION TO REDUCE FASTENER LENGTH REQUIREMENTS.)
3. WHEN GENFAST BATTEN STRIP IS USED TO SECURE SEAM2SEAM MEMBRANE TO THE WALL, POLYMER BATTEN STRIP OR METAL ANCHOR BAR MAY BE USED FOR WOOD OR METAL SUBSTRATE. METAL ANCHOR BAR MUST BE USED WITH MASONRY SUBSTRATE.
4. GENFAST BATTEN STRIP OR 2" (51 mm) METAL PLATES ARE ACCEPTABLE FOR FASTENING SEAM2SEAM MEMBRANE. BOTH ARE SHOWN IN ORDER TO ILLUSTRATE REQUIRED LAYOUT DIMENSIONS.



**MEMBRANE SECUREMENT AT
OUTSIDE CORNER**

GENFLEX™

ACCEPTABLE SYSTEMS: SEAM2SEAM™ EPDM

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

04/06/2020

DETAIL NO.

S2S-BT-16

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE