


NOTE:

1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
2. CONTINUOUS BEAD OF SEAM2SEAM SEALANT REQUIRED ALONG EDGES OF SEAM2SEAM MEMBRANE AND PEEL & STICK PRODUCTS. REFER TO S2S-LS-9 FOR PEEL & STICK EDGE TREATMENT.
3. USE APPROPRIATE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.

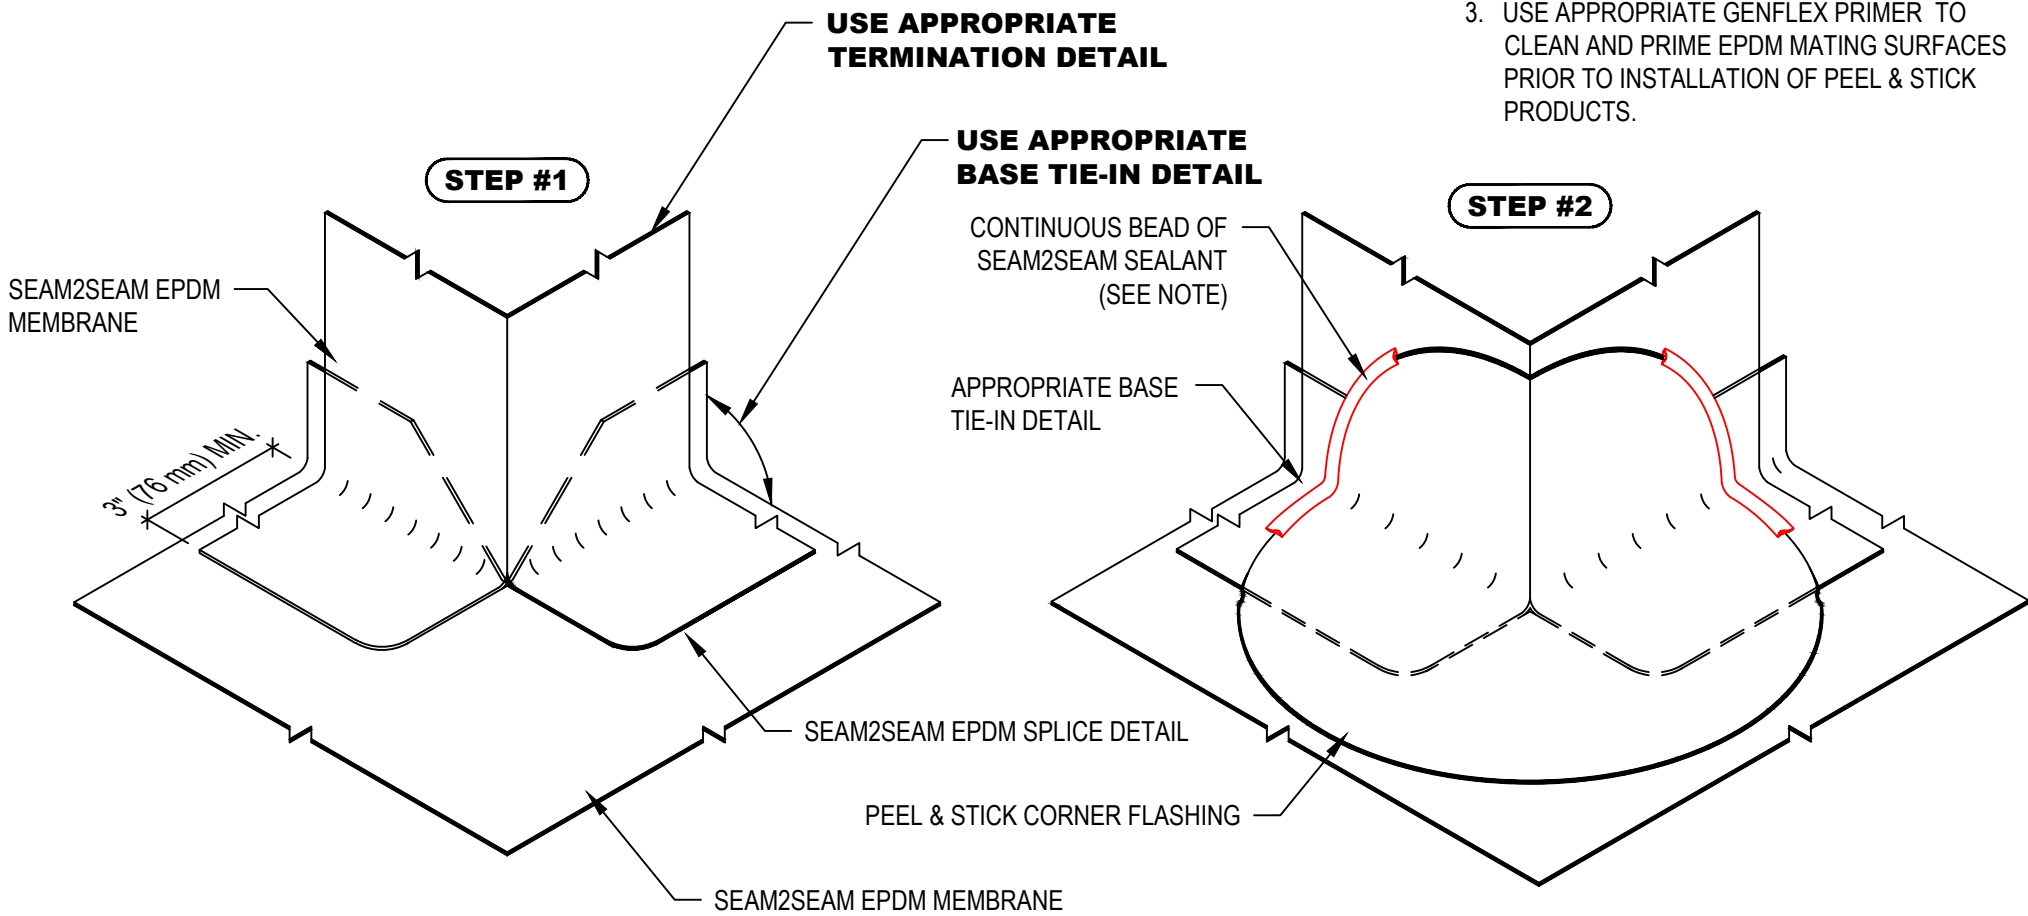

OUTSIDE CORNER WITH PEEL & STICK CORNER FLASHING - INSTALLATION STEPS

GENFLEX™

ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/06/2020

DETAIL NO.

S2S-C-1A

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE