


- NOTE:
1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
  2. APPLY SEAM2SEAM SEALANT AT 9" (229 mm) PEEL & STICK FLASHING AS INDICATED. REFER TO S2S -LS-9 FOR PEEL & STICK EDGE TREATMENT.
  3. USE APPROPRIATE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.

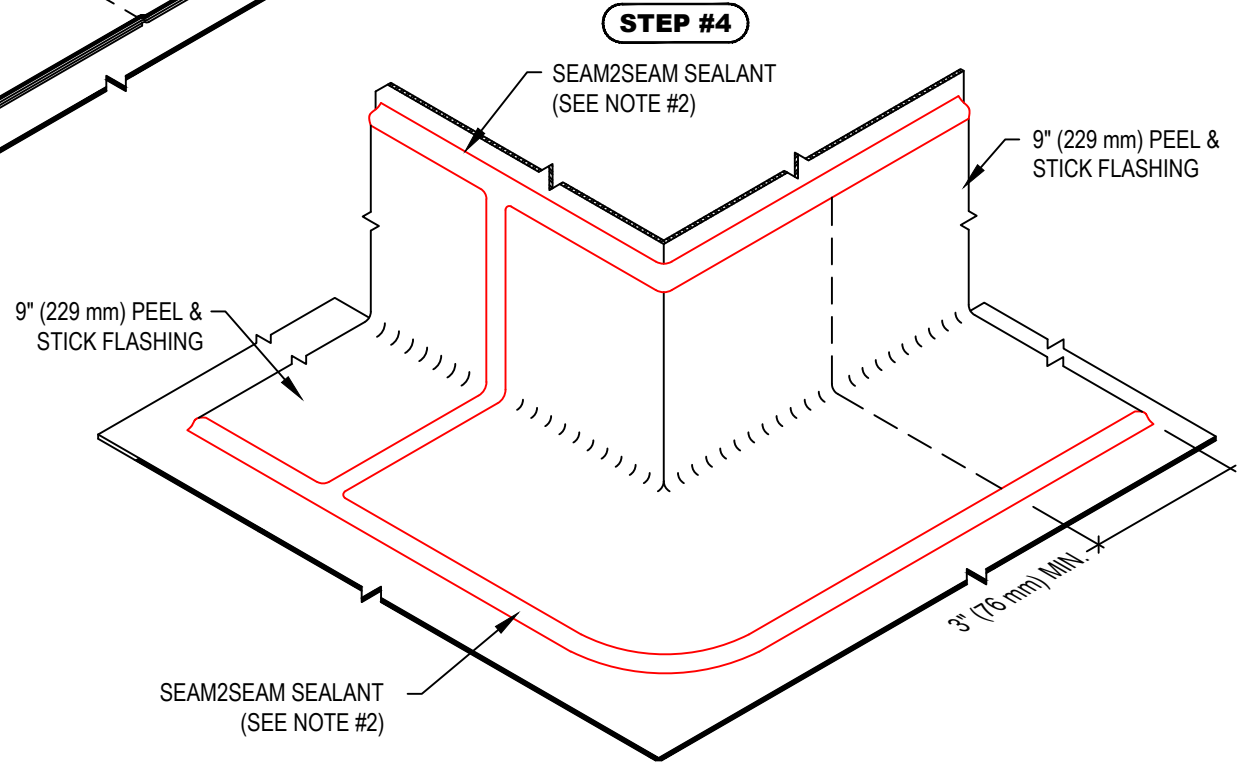

**OUTSIDE CORNER AT WELDED WATERTIGHT CURB (FLANGES UNDER 2") - INSTALLATION STEPS 3 & 4**

MAXIMUM WARRANTY: 20 Years

GENFLEX™

ACCEPTABLE SYSTEMS: SEAM2SEAM™ EPDM

ISSUE / REVISION DATE:  
04/06/2020

DETAIL NO.  
**S2S-C-2B**

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE