


CONTINUOUS BEAD OF SEAM2SEAM SEALANT (SEE NOTE #2)

**STEP #2**

**USE APPROPRIATE BASE TIE-IN DETAIL**

CONTINUOUS BEAD OF FULLFORCE SEALANT (SEE NOTE #2)

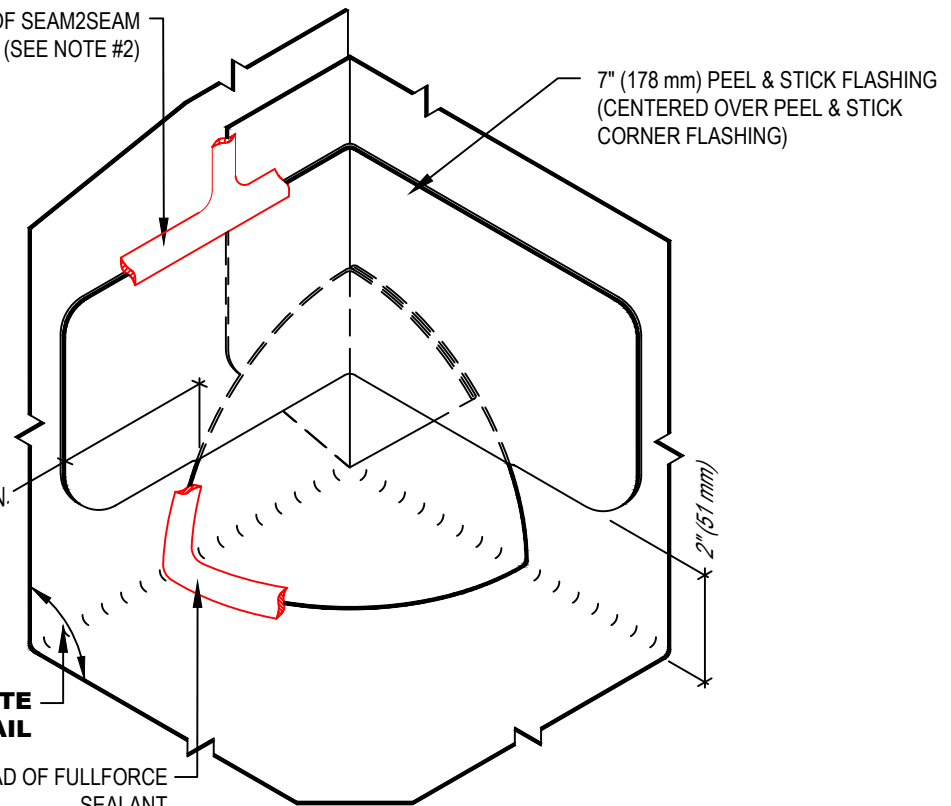

**NOTE:**

1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
2. APPLY GENFLEX SEALANT ALONG PERIMETER OF PEEL & STICK FLASHING. REFER TO S2S-LS-9 FOR PEEL & STICK EDGE TREATMENT.
3. USE APPROPRIATE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.



**INSIDE CORNER WITH 3" FLAP  
INSTALLATION STEPS**

**GENFLEX™**

ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/06/2020

DETAIL NO.

**S2S-C-4A**

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE