


USE APPROPRIATE TERMINATION DETAIL



- NOTE:**
1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
 2. APPLY SEAM2SEAM SEALANT ALONG PERIMETER OF PEEL & STICK PRODUCTS. REFER TO S2S-IS-9 FOR PEEL & STICK EDGE TREATMENT.
 3. PEEL & STICK FLASHING TO BE A MINIMUM OF 6" LONG.
 4. USE APPROPRIATE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.

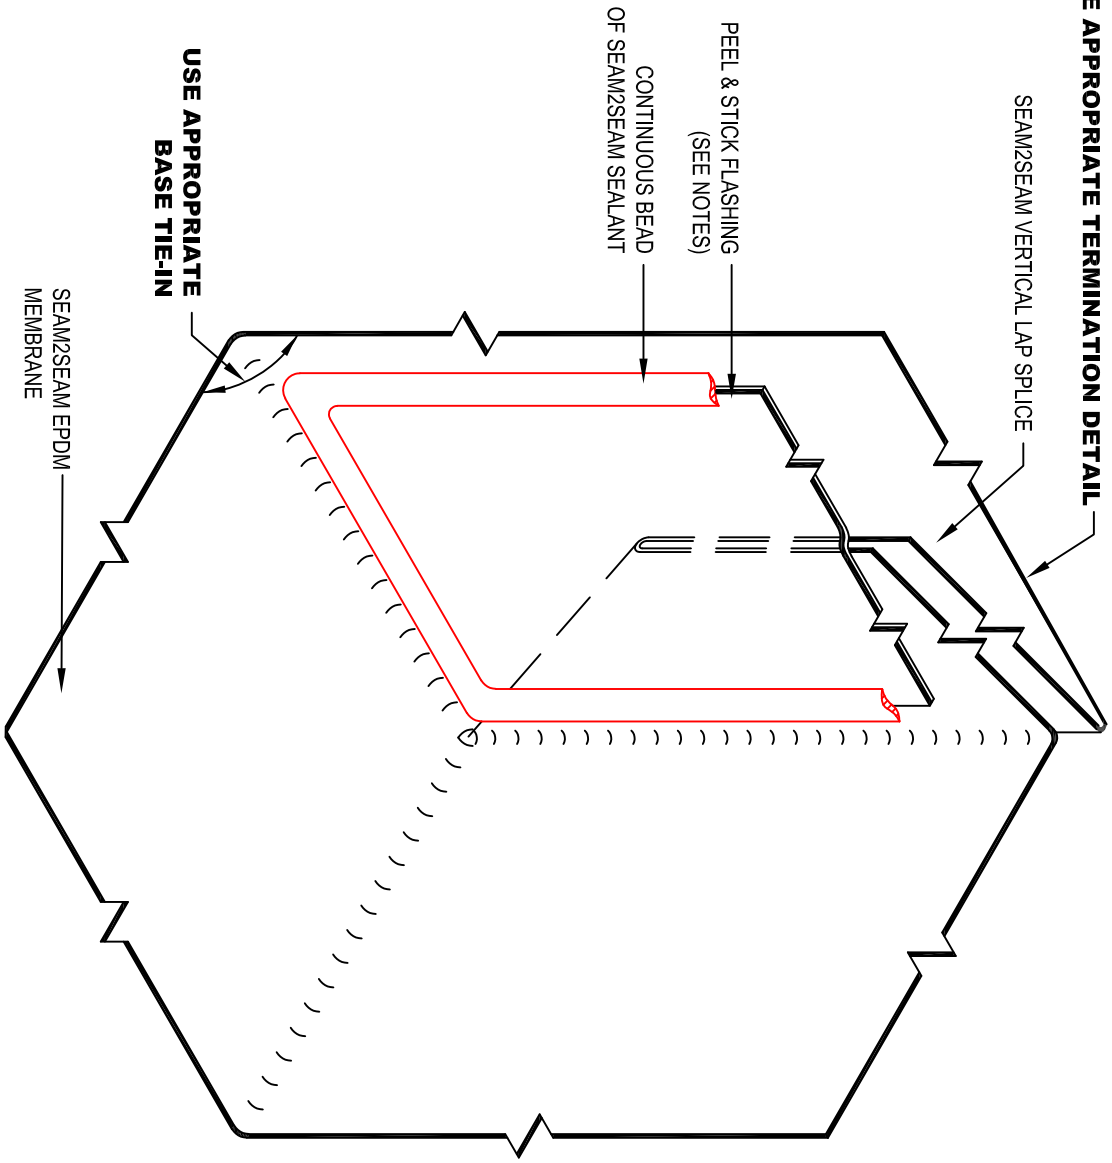

INSIDE CORNER - FOLDED MEMBRANE WITH PEEL & STICK FLASHING

GENFLEX™
ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

GENFLEX: (800) 443-4272 www.genflex.com

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

06/01/2020

DETAIL NO.

S2S-C-5

NOT TO SCALE