


NOTE:

1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
2. SEAMS MAY RUN PARALLEL TO SLOPE.
3. USE ACCEPTABLE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO REMOVAL OF SEAM2SEAM SEAM RELEASE LINER.
4. SEAM2SEAM SEALANT IS REQUIRED OVER ALL FIELD AND FLASHING SEAM EDGES.
5. EXTRA CLEANING IS REQUIRED AT FACTORY SPLICE AREAS AND OTHER AREAS WHERE EXCESS DUSTING AGENTS MAY HAVE ACCUMULATED.

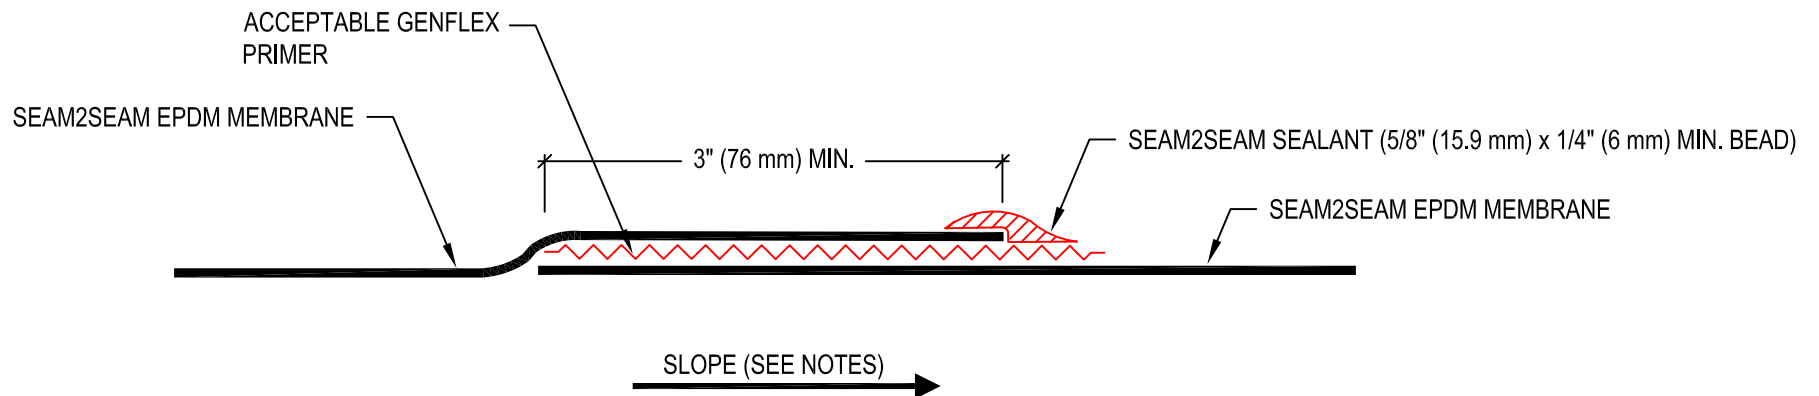

LAP SPLICE

GENFLEX™

ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

01/05/2023

DETAIL NO.

S2S-L-1

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE