


NOTE:

1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
2. SEAMS MAY RUN PARALLEL TO SLOPE.
3. USE ACCEPTABLE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO REMOVAL OF SEAM2SEAM SEAM RELEASE LINER.
4. SEAM2SEAM SEALANT IS REQUIRED OVER ALL FIELD AND FLASHING SEAM EDGES.
5. EXTRA CLEANING IS REQUIRED AT FACTORY SPLICE AREAS AND OTHER AREAS WHERE EXCESS DUSTING AGENTS MAY HAVE ACCUMULATED.

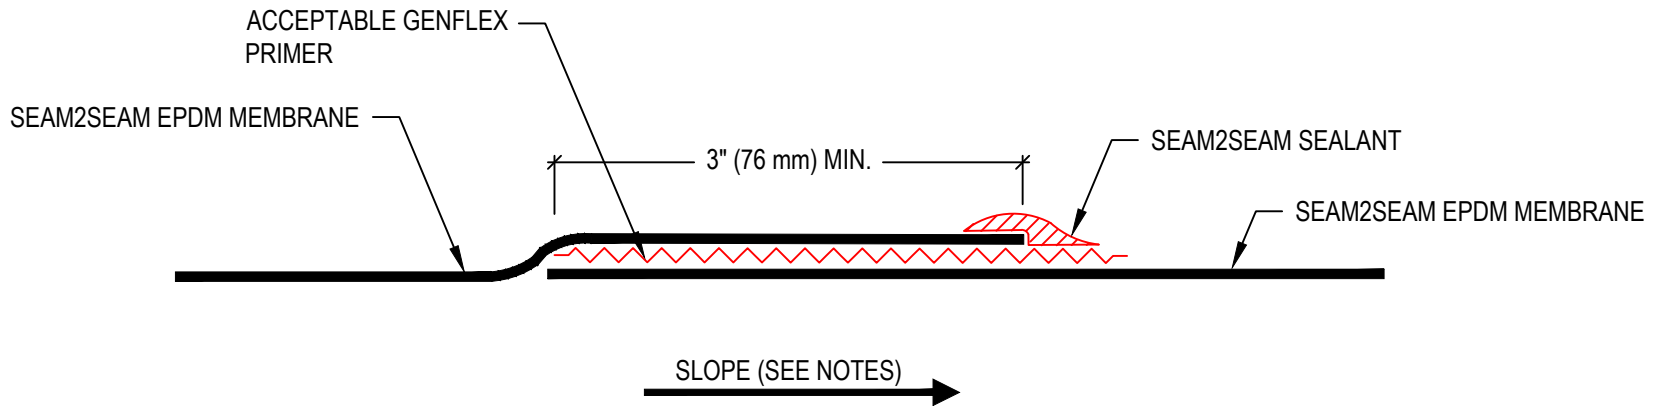

LAP SPLICE

GENFLEX™

ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

GENFLEX: (800) 443-4272 www.genflex.com

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

04/06/2020

NOT TO SCALE

DETAIL NO.

S2S-L-1