


- NOTE:
1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
 2. GENFLEX SEALANT IS REQUIRED OVER ALL FIELD AND FLASHING SEAMS. REFER TO S2S-LS-1 FOR SEAM EDGE TREATMENT.
 3. 7" (178 mm) PEEL & STICK FLASHING (5" x 5" MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF PEEL & STICK T-JOINT COVER.
 4. USE ACCEPTABLE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO REMOVAL OF SEAM RELEASE LINER OR INSTALLATION OF PEEL & STICK PRODUCTS.

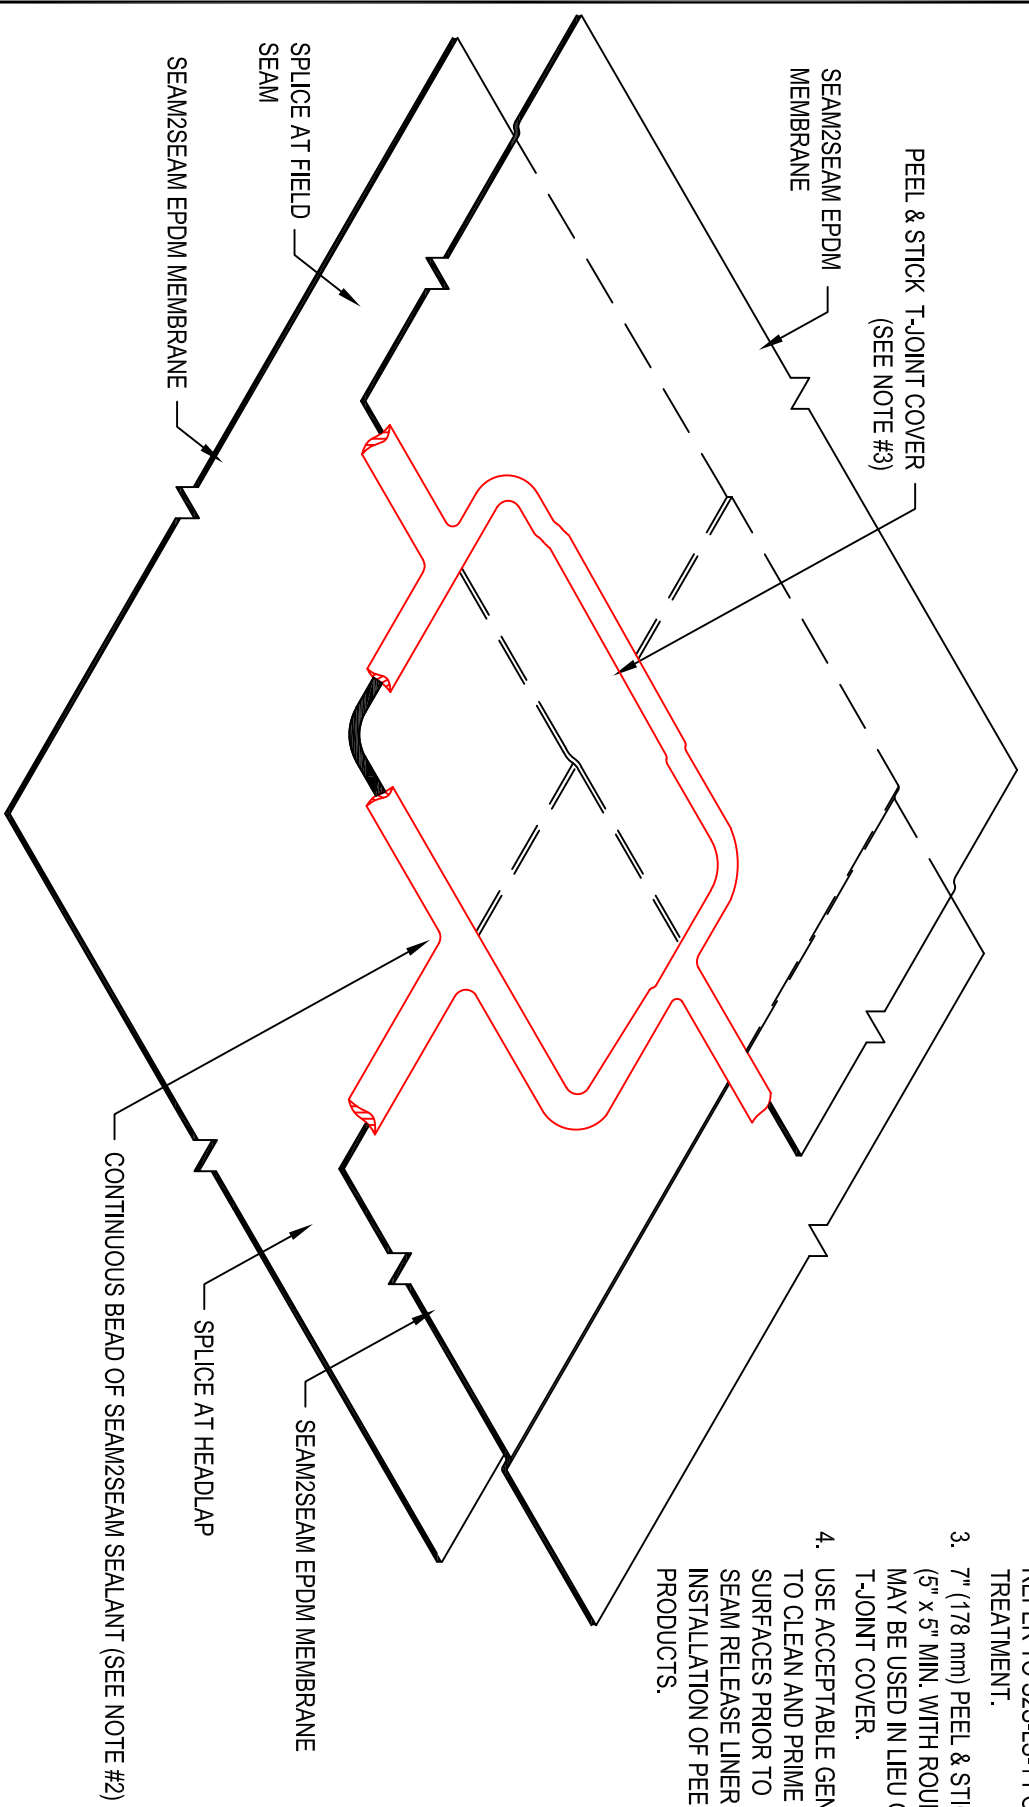

**LAP SPLICE WITH HEADLAP UNDER FIELD SEAM
USING PEEL & STICK T-JOINT COVER**

GENFLEX™
ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

06/12/2020

DETAIL NO.

S2S-LS-3

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE

