


- NOTE:
1. REFER TO GENFLEX WEBSITE FOR THE MOST CURRENT INFORMATION.
 2. SEAM2SEAM SEALANT IS REQUIRED OVER ALL FIELD AND FLASHING SEAMS.
 3. USE ACCEPTABLE GENFLEX PRIMER TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO SEAM SPLICING AND INSTALLATION OF PEEL & STICK PRODUCTS.

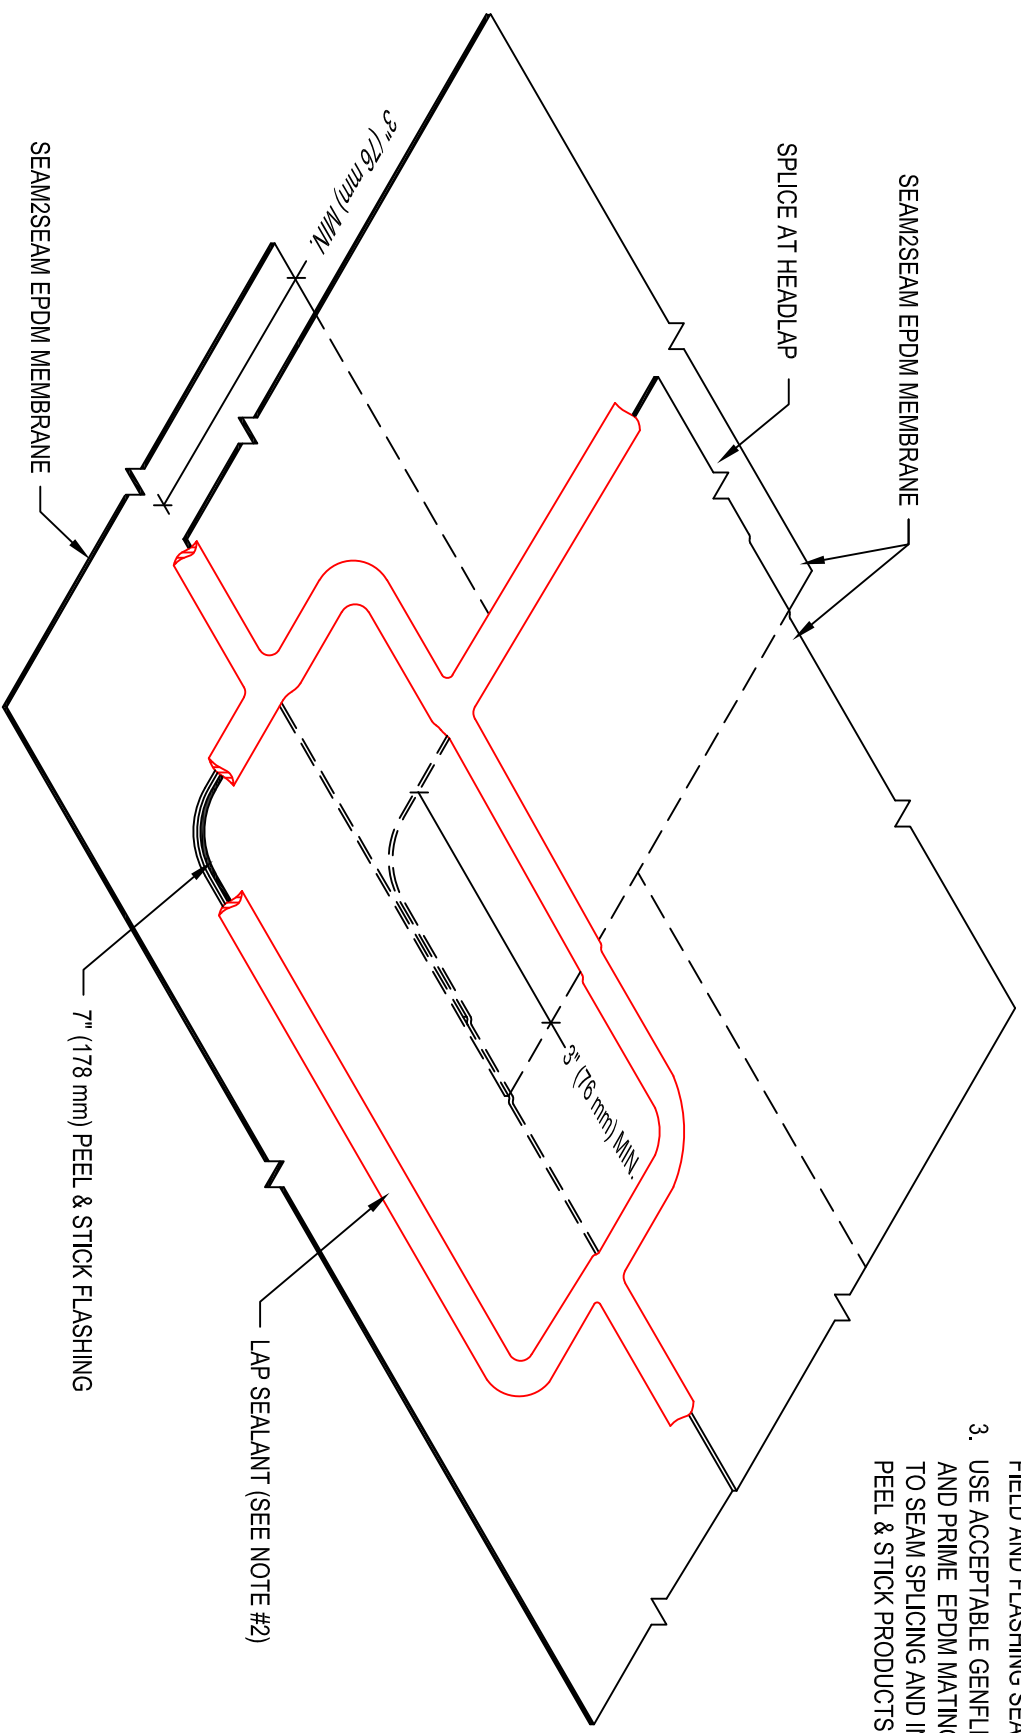

**LAP SPLICE WITH HEADLAP OVER FIELD SEAM
USING 7" PEEL & STICK FLASHING**

GENFLEX™
ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

GENFLEX: (800) 443-4272 www.genflex.com

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

06/01/2020

NOT TO SCALE

DETAIL NO.

S2S-LS-5