


1-1/4" HOT DIPPED GALVANIZED ROOF
NAILS AT 12" (305 mm) O.C. MAX.

WOOD NAILER

INSULATED METAL CURB

INSULATION BY OTHERS

R.T.U.

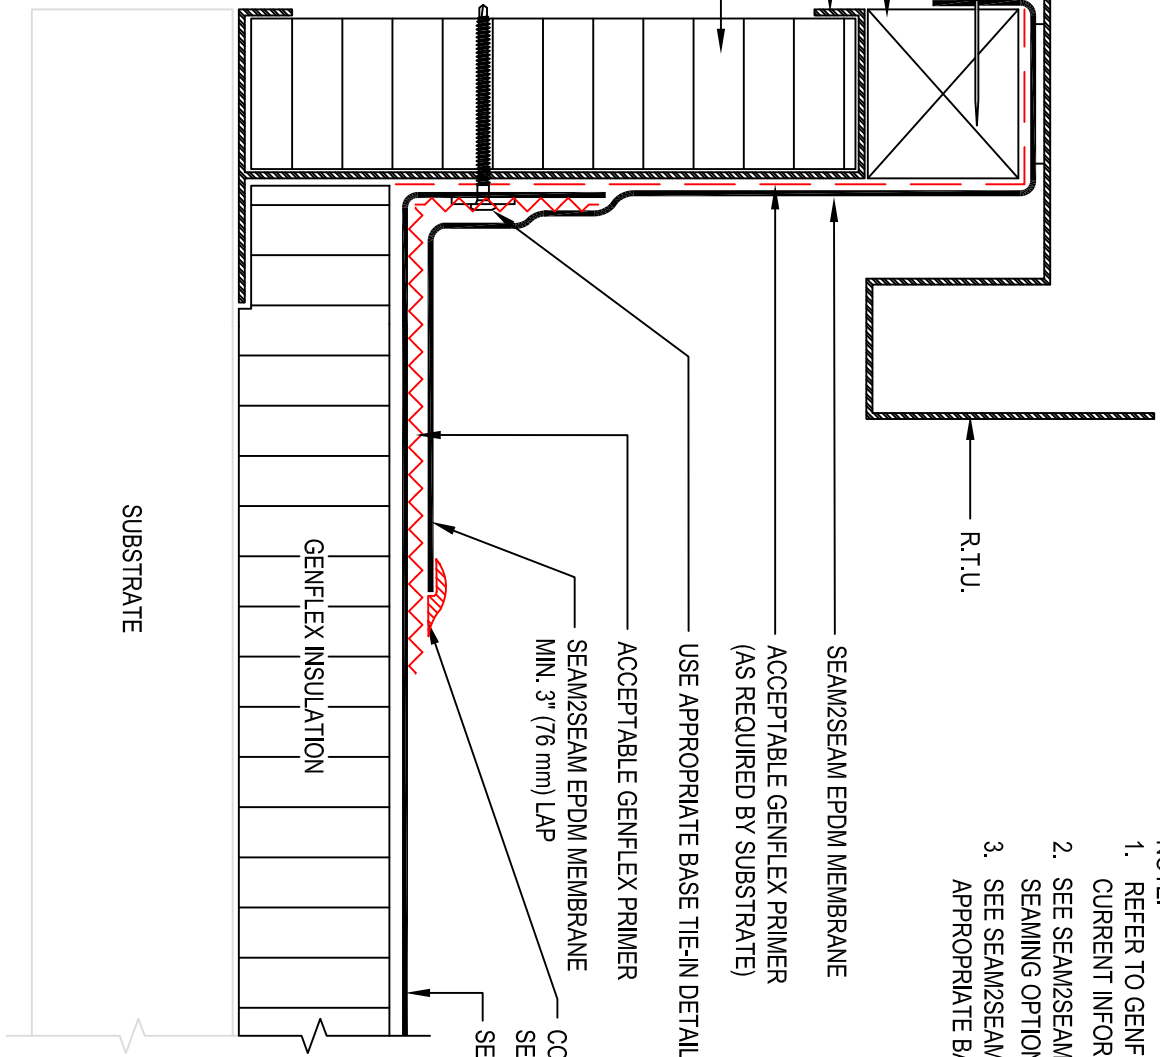

- NOTE:
1. REFER TO GENFLEX WEBSITE FOR MOST CURRENT INFORMATION.
 2. SEE SEAM2SEAM LAP SPLICE DETAILS FOR APPROVED SEAMING OPTIONS.
 3. SEE SEAM2SEAM BASE TIE-IN DETAILS FOR APPROPRIATE BASE TIE-IN OPTIONS.

SEAM2SEAM EPDM MEMBRANE
ACCEPTABLE GENFLEX PRIMER
(AS REQUIRED BY SUBSTRATE)
USE APPROPRIATE BASE TIE-IN DETAIL

ACCEPTABLE GENFLEX PRIMER
SEAM2SEAM EPDM MEMBRANE
MIN. 3" (76 mm) LAP

CONTINUOUS BEAD OF
SEAM2SEAM EDGE SEALANT
SEAM2SEAM EPDM MEMBRANE

GENFLEX INSULATION

SUBSTRATE



TERMINATION AT R.T.U. WITH SEPARATE FLASHING

GENFLEX™ ACCEPTABLE SYSTEMS: SEAM2SEAM™ EPDM

GENFLEX: (800) 443-4272 www.genflex.com

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

06/01/2020

NOT TO SCALE

DETAIL NO.

S2S-T-18