


USE APPROPRIATE TERMINATION

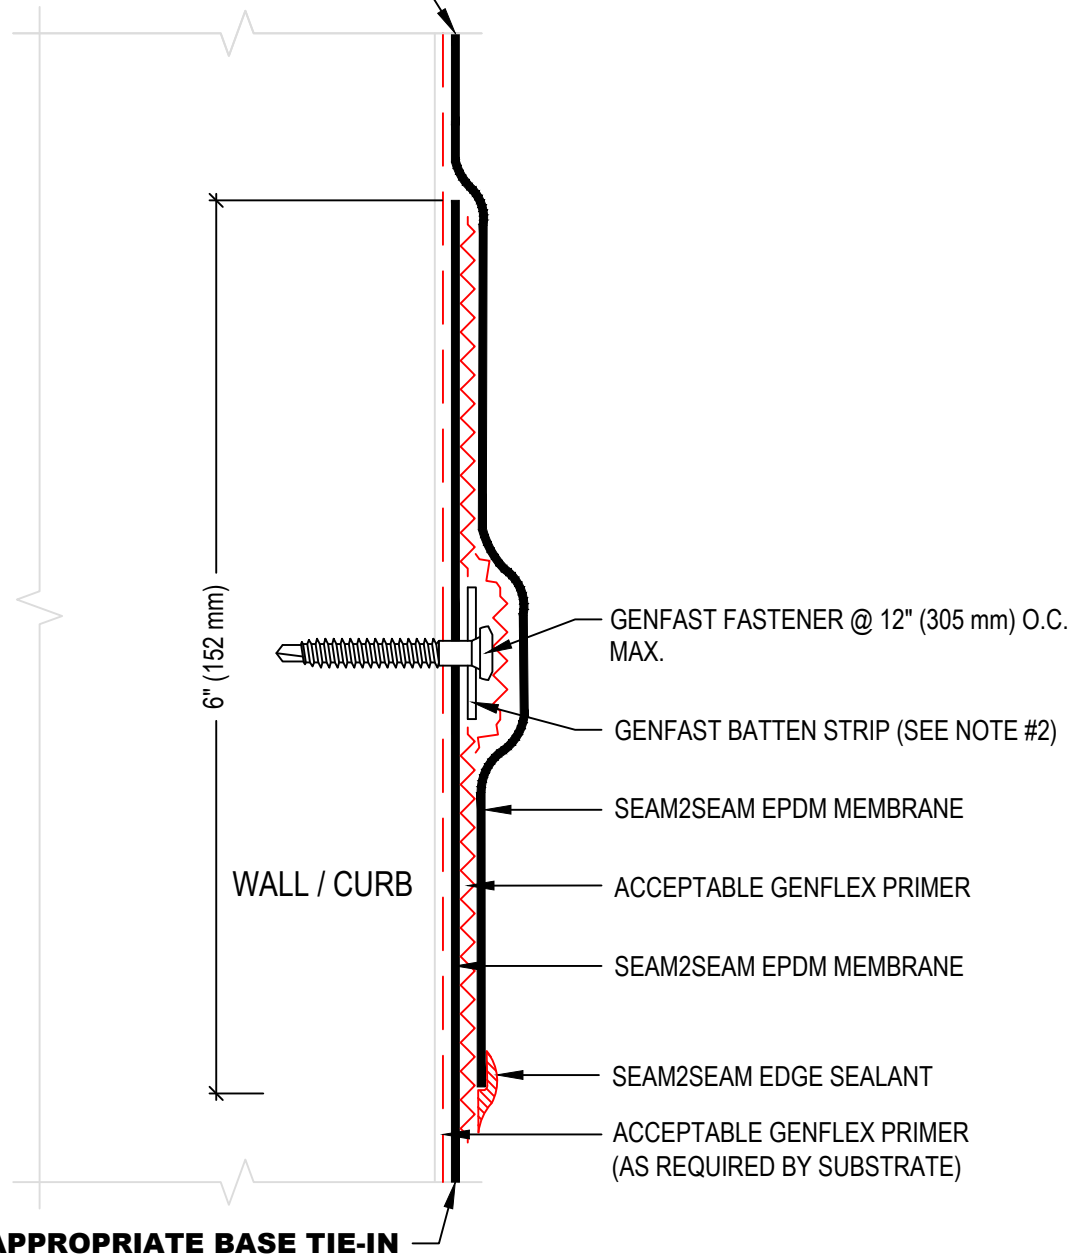

USE APPROPRIATE BASE TIE-IN

NOTE:

1. REFER TO GENFLEX WEBSITE FOR MOST CURRENT INFORMATION.
2. POLYMER BATTEN STRIP OR METAL ANCHOR BAR ACCEPTABLE FOR WOOD OR METAL SUBSTRATE. METAL ANCHOR BAR MUST BE USED WITH MASONRY SUBSTRATE.
3. IF INTERMEDIATE ATTACHMENT IS REQUIRED, COMPLETE AS FOLLOWS:
 -UP TO 5' (1.5 m) WALL HEIGHT - NONE REQUIRED.
 -5' (1.5 m) - 10' (3 m) WALL HEIGHT - ONE ATTACHMENT AT 1/2 THE WALL HEIGHT.
 -ABOVE 10' (3 m) - ONE ATTACHMENT EVERY 3' (1 m).
4. THERE ARE SOME CONDITIONS WHICH DO NOT REQUIRE INTERMEDIATE ATTACHMENT. REFER TO GENFLEX APPLICATION SPECIFICATIONS FOR ADDITIONAL INFORMATION.



**INTERMEDIATE WALL FLASHING ATTACHMENT
WITH BATTEN STRIP**

GENFLEX™

ACCEPTABLE SYSTEMS: **SEAM2SEAM™ EPDM**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

04/06/2020

DETAIL NO.

S2S-T-22

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE