

USE APPROPRIATE TERMINATION DETAIL


APPROPRIATE PRIMER

5.5" (139.7 mm) GENFLEX EZ PEEL & STICK FLASHING OR UNSUPPORTED FLASHING (SEE NOTE #3 & #4)

USE APPROPRIATE BASE TIE-IN DETAIL

TPO PRE-MOLDED INSIDE & OUTSIDE CORNER WELDED IN PLACE (SEE NOTE #3)

EZ TPO PEEL & STICK MEMBRANE

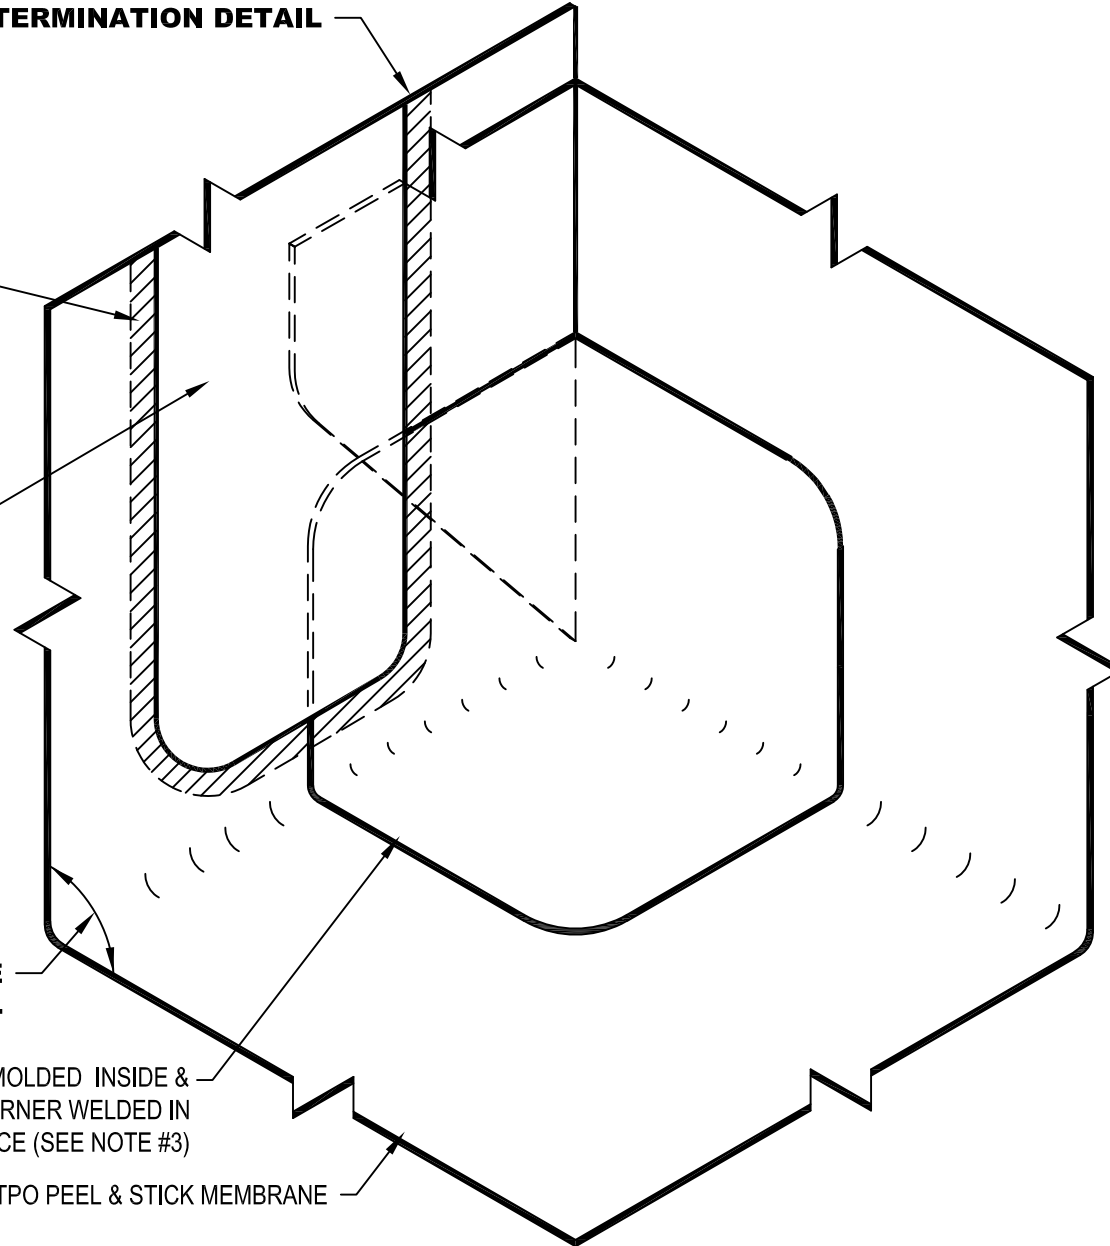

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-PS-LS-01 OR EZT-PS-LS-02 FOR WELD WIDTH.
3. GENFLEX NON-REINFORCED FLASHING MAY BE USED IN LIEU OF PRE-MOLDED ULTRAPLY TPO INSIDE/OUTSIDE CORNER **FOR A MAXIMUM WARRANTY OF 15 YEARS.**
4. IF INSIDE CORNER IS FIELD FABRICATED USE AN ADDITIONAL PIECE OF UNSUPPORTED FLASHING TO COVER FOLD.
5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO DETAIL EZT-PS-LS-04 FOR CUT EDGE SEALANT APPLICATION



INSIDE CORNER

MAXIMUM WARRANTY: 20 Years

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™ SELF ADHERED

ISSUE / REVISION DATE:

05/01/2023

DETAIL NO.

EZT-PS-C-02

(800) 443-4272 www.genflex.com

NOT TO SCALE