

NOTE:

- 1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT DETAILS.
- 2. SEAMS MAY RUN PARALLEL WITH WATER FLOW
- 3. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-PS-LS-04 FOR CUT EDGE SEALANT APPLICATION.

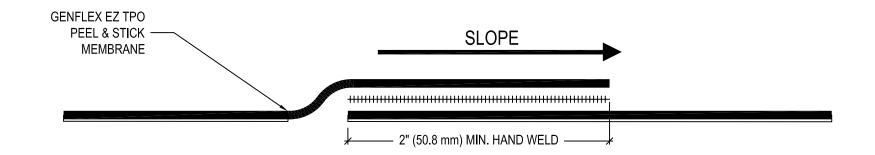

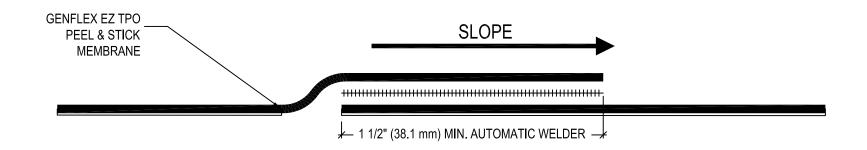

WHEN POLYESTER REINFORCEMENT OF TPO IS **EXPOSED, APPLY CUT EDGE TREATMENT TO** ENTIRE EXPOSED EDGE. REFER TO EZT-PS-LS-04.

√ G	FN	FI	F)	(
0	LI4	-	L /	•

LAP SPLICE WITH CONTINUOUS WELD

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™ ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™ SELF ADHERED

(800) 443-4272 www.genflex.com

MAXIMUM	WARRANT	Y: 20	Years

ISSUE / REVISION DATE:

DETAIL NO.

05/01/2023 EZT-PS-LS-01

NOT TO SCALE