
NOTE:

- REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
- 2. IF THE TOP OF MEMBRANE IS CONTAMINATED BY ADHESIVE OR ASPHALT ON EITHER SIDE OF THE END SPLICE, CLEAN THOROUGHLY PRIOR TO WELDING.
- 3. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-PS-LS-04 FOR CUT EDGE SEALANT APPLICATION.

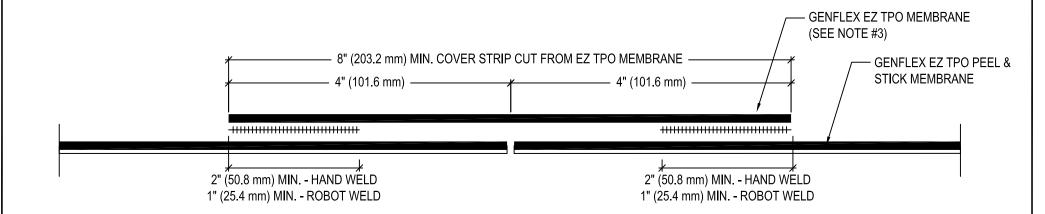

WHEN POLYESTER REINFORCEMENT OF TPO IS **EXPOSED, APPLY CUT EDGE TREATMENT TO ENTIRE EXPOSED EDGE. REFER TO EZT-PS-LS-04.**

₹ G	FN	FΙ	F)	(
G	LI4	-		•

SELF ADHERED TPO END LAP SPLICE WITH WELDED TPO COVER STRIP

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™ SELF ADHERED

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

DETAIL NO. 05/01/2023

EZT-PS-LS-02

(800) 443-4272 www.genflex.com

NOT TO SCALE