


- NOTE:
1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
 2. REFER TO DETAIL EZT-PS-LS-01 FOR WELD WIDTH.
 3. T-JOINT COVER REQUIRED FOR MEMBRANE WITH A GAUGE GREATER THAN .045.
 4. GENFLEX NON-REINFORCED FLASHING (4" x 4" (101.6 mm x 101.6mm) MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER.
 5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-PS-LS-04 FOR CUT EDGE SEALANT APPLICATION.

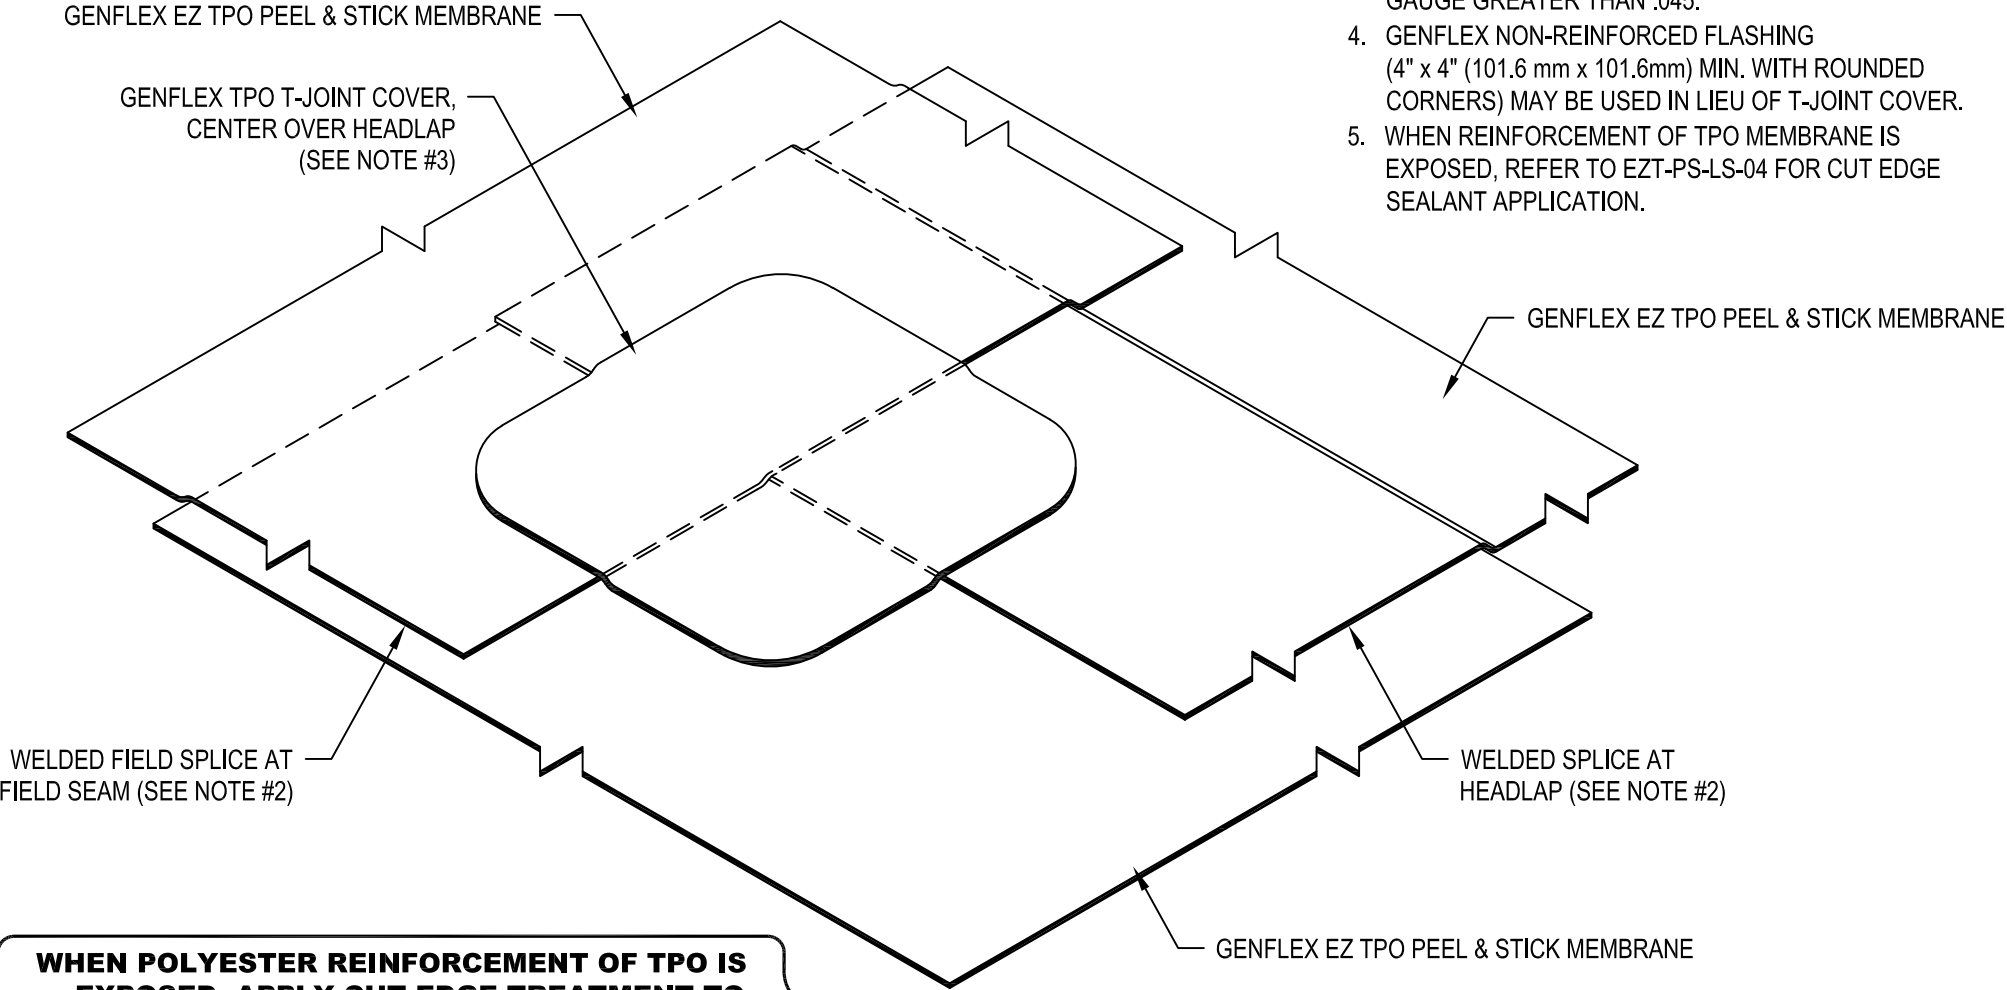

WHEN POLYESTER REINFORCEMENT OF TPO IS EXPOSED, APPLY CUT EDGE TREATMENT TO ENTIRE EXPOSED EDGE. REFER TO EZT-PS-LS-04.

**LAP SPLICE WITH LAP UNDER FIELD SEAM
USING T-JOINT COVER**

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™ SELF ADHERED

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:
05/01/2023

DETAIL NO.
EZT-PS-LS-03

