


NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-PS-LS-01 FOR WELD WIDTH.



WHEN POLYESTER REINFORCEMENT OF TPO IS EXPOSED, APPLY CUT EDGE SEALANT TO ENTIRE EXPOSED EDGE.

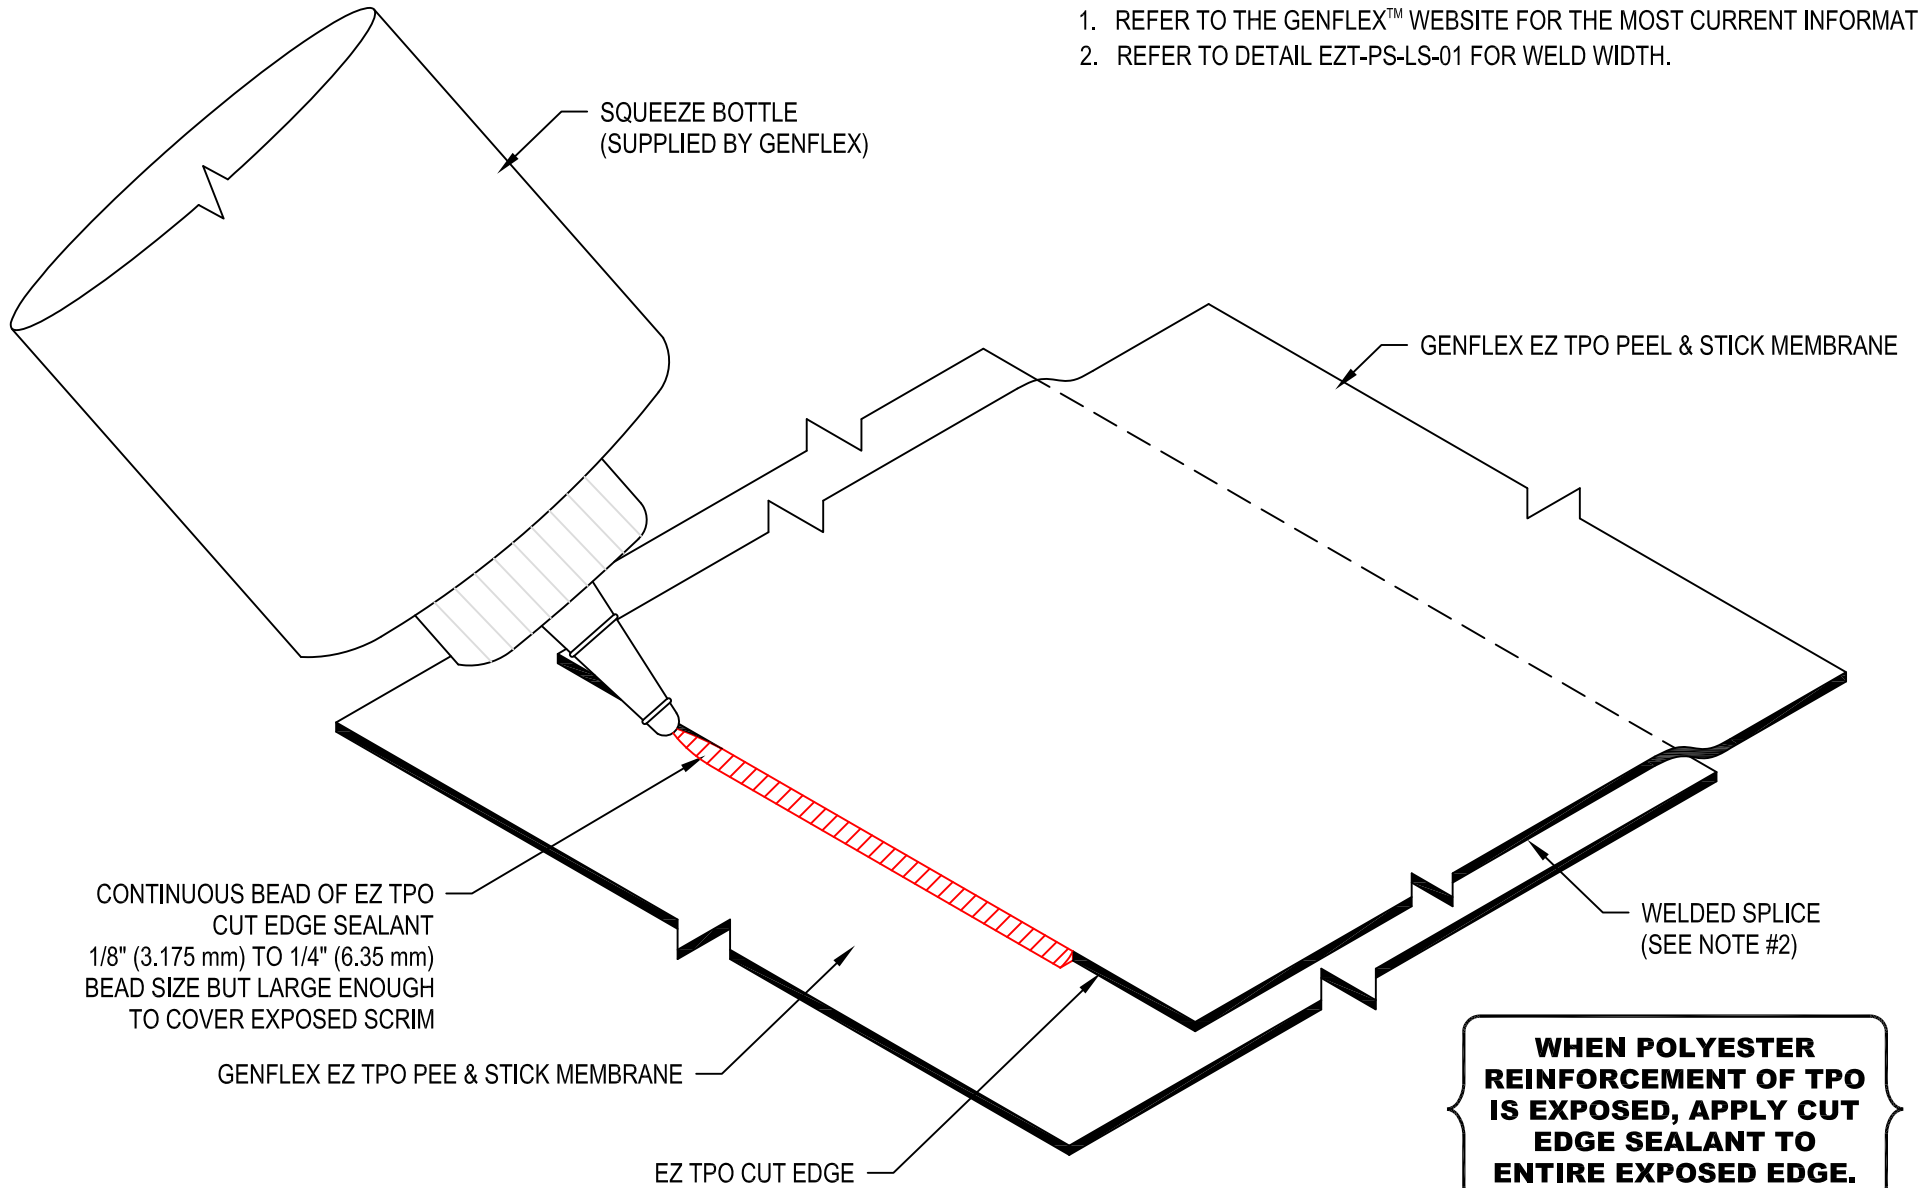

CUT EDGE TREATMENT APPLICATION

MAXIMUM WARRANTY: 20 Years

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™

ACCEPTABLE SYSTEMS: EZ TPO PEEL & STICK™ SELF ADHERED

ISSUE / REVISION DATE:

05/01/2023

DETAIL NO.

EZT-PS-LS-04

(800) 443-4272 www.genflex.com

NOT TO SCALE