


NOTE:

1. REFER TO ELEVATE™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. APPLY EDGE CAULK AS SHOWN. REFER TO EZE-PS-LS-03 FOR SEAM EDGE TREATMENT.
3. 6" COVER TAPE (6"x6" MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF PEEL & STICK T-JOINT COVER. REFER TO EZE-PS-LS-03 FOR SEAM EDGE TREATMENT.
4. USE GENPRIME TO CLEAN AND PRIME EPDM MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.
5. STRIP IN EXPOSED P&S ADHESIVE WITH 6" COVER TAPE.

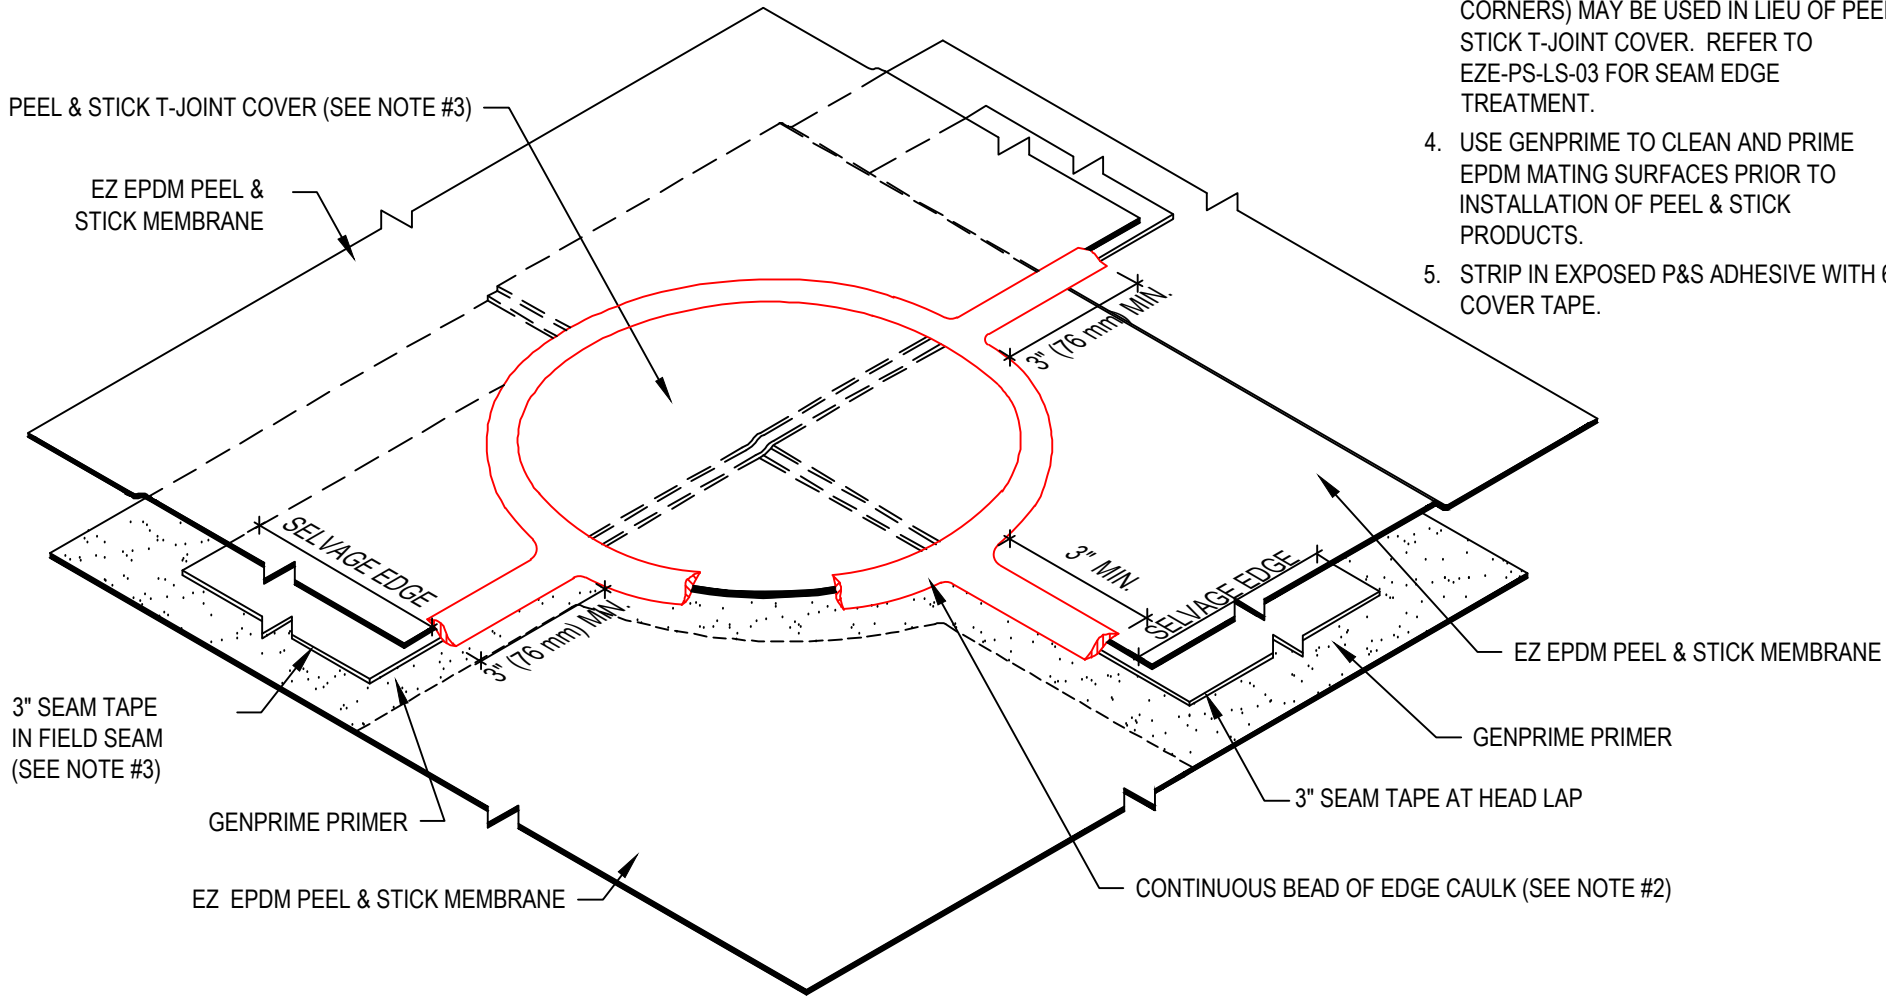

**LAP SPLICE WITH HEADLAP UNDER FIELD SEAM
USING 3" SEAM TAPE**

ACCEPTABLE SYSTEMS: EZ EPDM PEEL & STICK™ SELF ADHERED

(800) 443-4272 www.genflex.com

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:
07/28/2023

NOT TO SCALE

DETAIL NO.
EZE-PS-LS-02