


1-1/4" HOT DIPPED GALVANIZED ROOF NAILS @ 12" (305 mm) O.C. MAX

WOOD NAILER (SEE NOTE #3)

INSULATED METAL CURB

INSULATION BY OTHERS

WOOD NAILER (SEE NOTE #3)

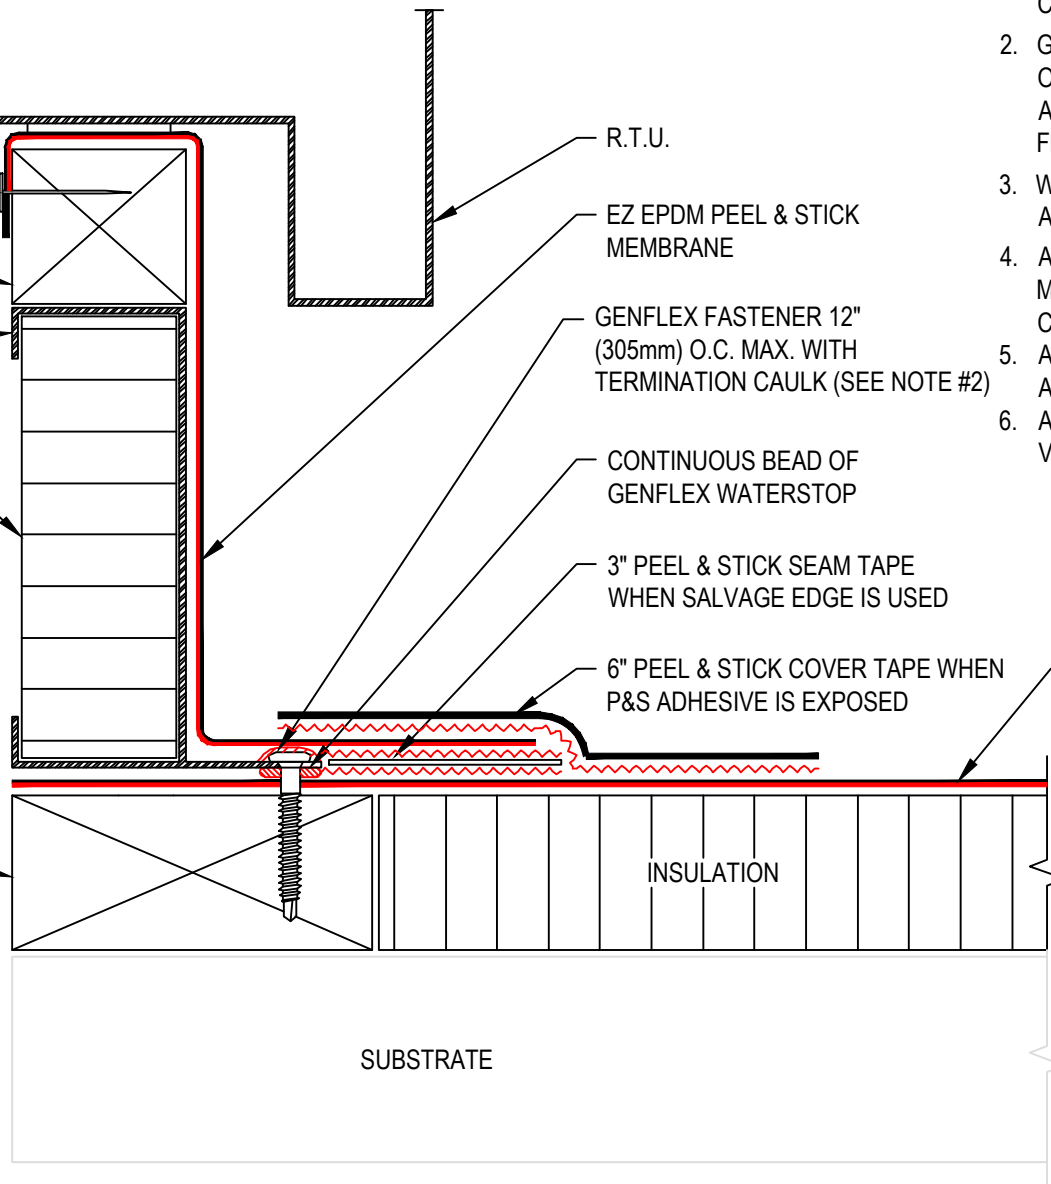

NOTE:

1. REFER TO GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. GENFLEX FASTENER WITH TERMINATION CAULK OVER FASTENER HEADS. TERMINATION CAULK ALSO REQUIRED ALONG ENTIRE EDGE OF CURB FLANGE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES.
4. ALL EDGES WITH P&S ADHESIVE EXPOSED MUST BE STRIPPED IN WITH 6" PEEL & STICK COVER TAPE.
5. APPROVED PRIMERS INCLUDE GENPRIME AND ALL PURPOSE LVOC PRIMER.
6. APPROVED PRIMER REQUIRED ON ALL VERTICAL SURFACES.



**TERMINATION AT R.T.U.
(UNIT FLANGE ABOVE MEMBRANE)**

ACCEPTABLE SYSTEMS: EZ EPDM PEEL & STICK™ SELF ADHERED

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

07/28/2023

DETAIL NO.

EZE-PS-T-11

(800) 443-4272 www.genflex.com

NOT TO SCALE