


NOTE:

1. REFER WWW.GENFLEX.COM FOR MOST CURRENT INFORMATION.
2. REFER TO DETAILS MB-LS-1, MB-LS-2, & MB-LS-3 FOR APPROPRIATE LAP SEALING APPLICATIONS.
3. USE WHEN SERVICE LINE TEMPERATURE EXCEEDS 160 °F (71 °C).

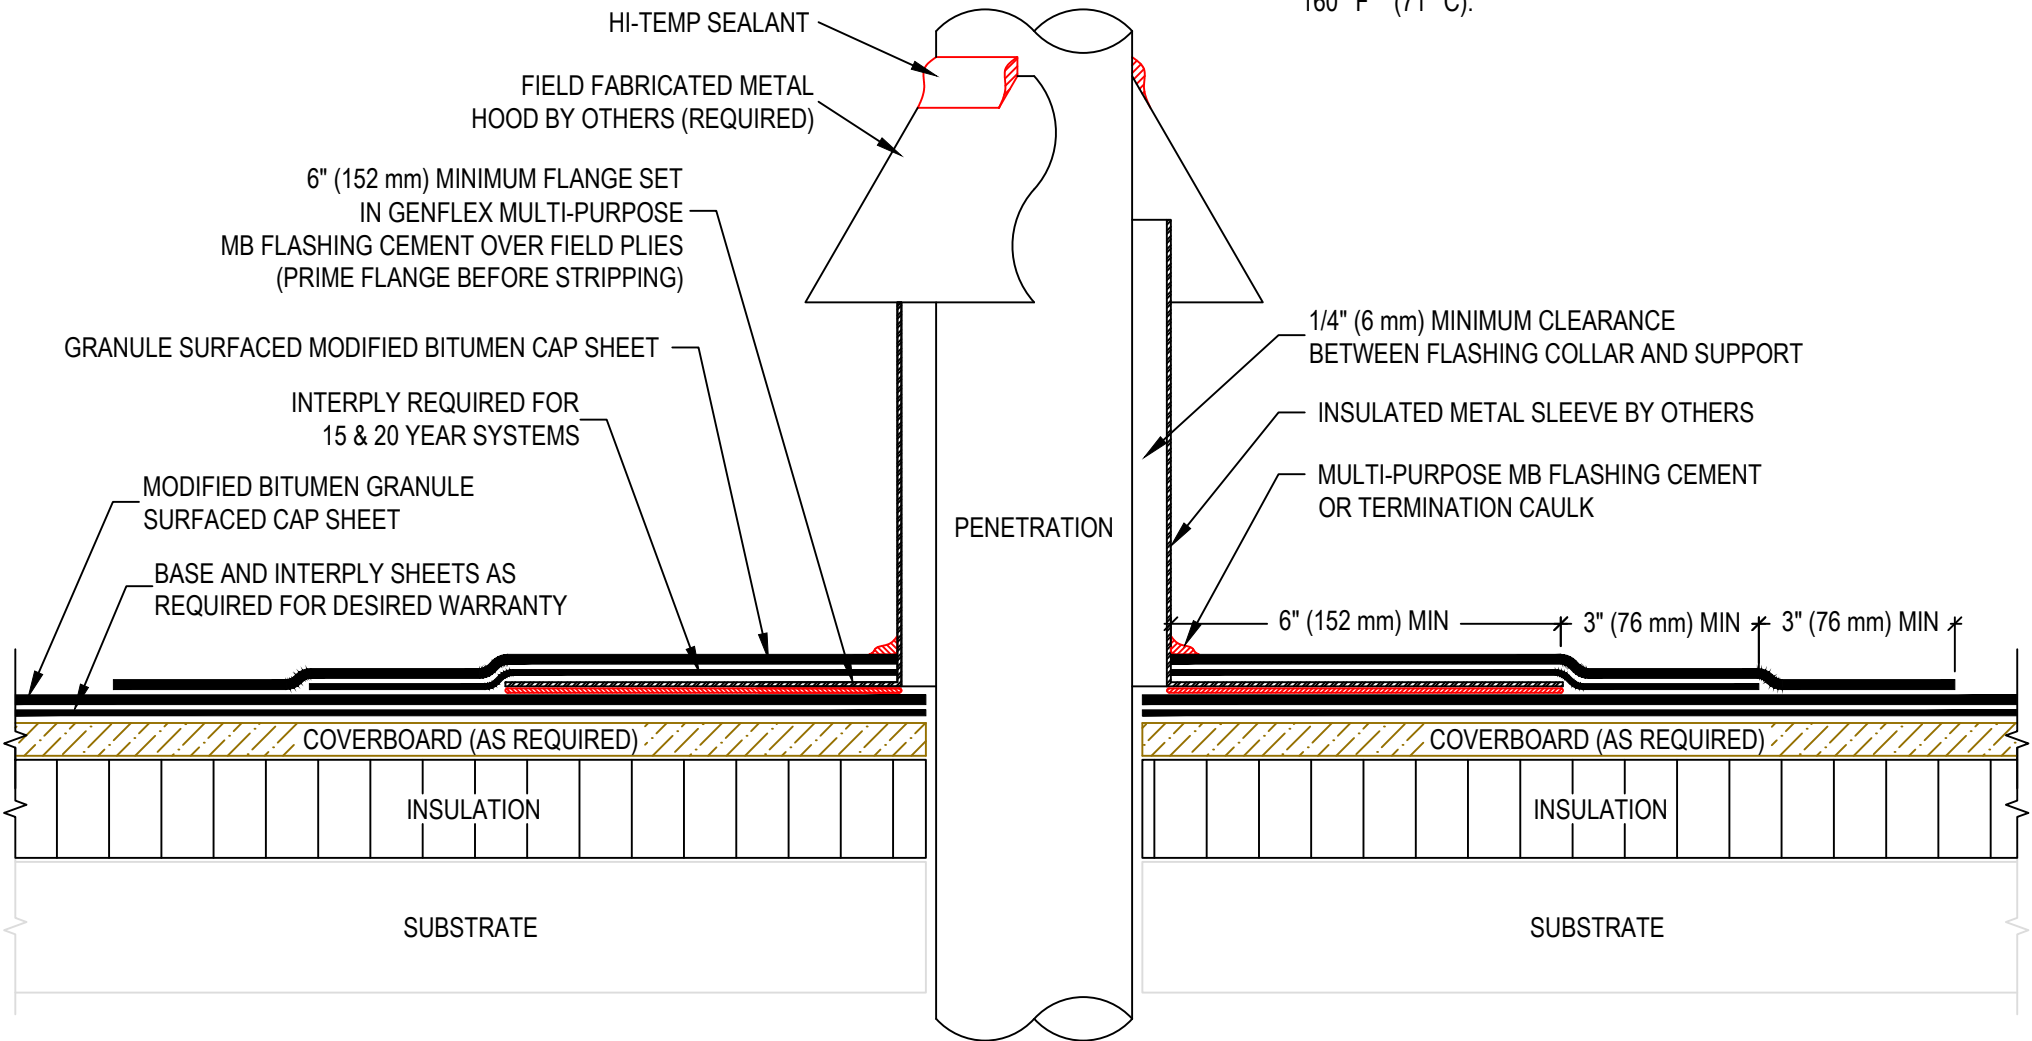

HOT STACK FLASHING

GENFLEX™

ACCEPTABLE SYSTEMS: **MODIFIED BITUMEN**

GENFLEX: (800) 443-4272 www.genflex.com

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

05/21/2025

NOT TO SCALE

DETAIL NO.

MB-P-1