


NOTE:

1. REFER TO WWW.GENFLEX.COM FOR MOST CURRENT INFORMATION.
2. USE WHEN SERVICE LINE TEMPERATURE EXCEEDS 160 °F (71 °C).

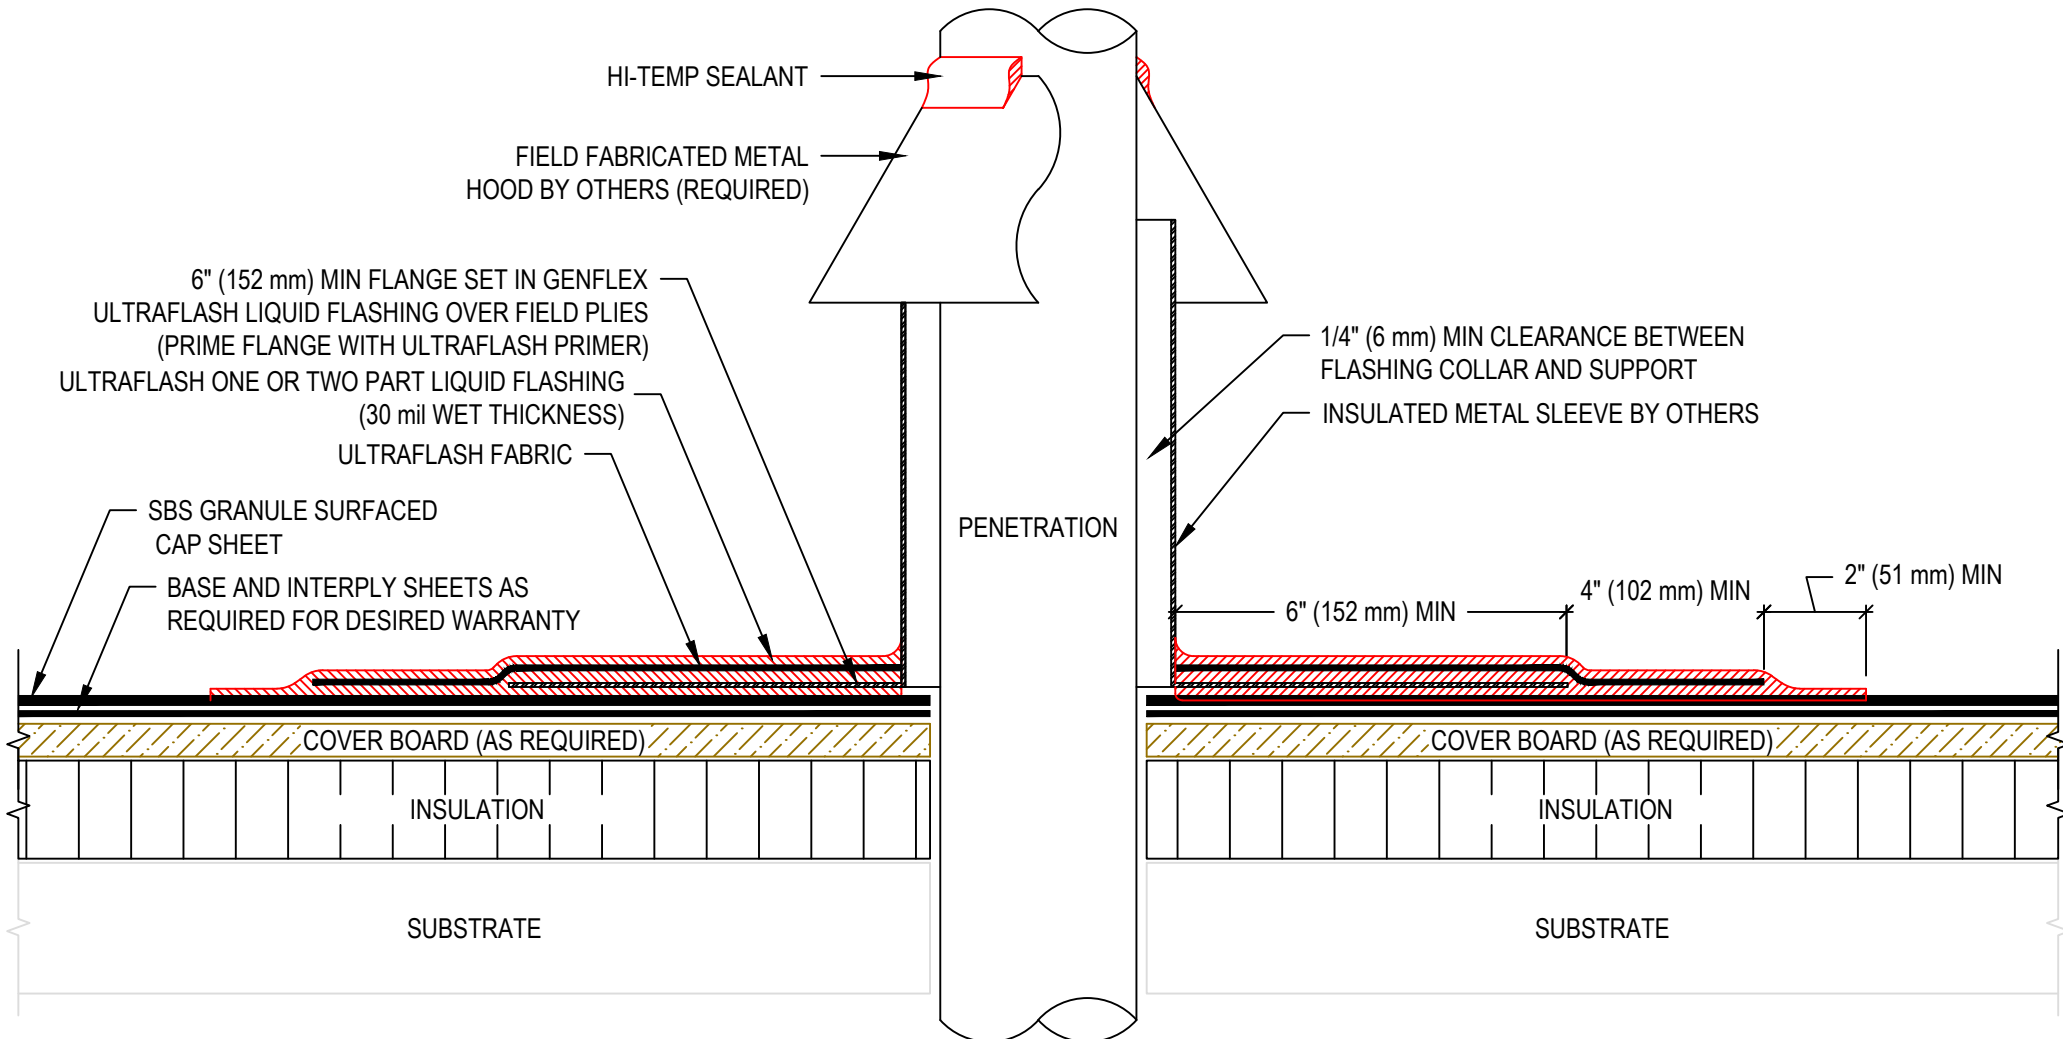

**ULTRAFLASH HOT STACK FLASHING**

**GENFLEX™**

ACCEPTABLE SYSTEMS: **MODIFIED BITUMEN**

GENFLEX: (800) 443-4272 [www.genflex.com](http://www.genflex.com)

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION  
DATE:

05/21/2025

NOT TO SCALE

DETAIL NO.

**MB-P-9**