

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO EZT-LS-01 OR EZT-LS-02 FOR WELD WIDTH.
3. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.
4. ROUND CORNERS REQUIRED ON FLASHING MATERIALS.
5. TAKE CARE NOT TO OVER STRETCH NON-REINFORCED FLASHING DURING INSTALLATION. ADDITIONAL FLASHING MAY BE REQUIRED IF NON-REFINFORCED MATERIAL IS INSTALLED IMPROPERLY.
6. PRE-MOLDED EZ TPO OUTSIDE CORNER MAY BE USED IN LIEU OF NON-REINFORCED FLASHING.


WARRANTY MEMBRANE REQUIREMENTS:

15-YEAR
TPO - 45 MIL

20-YEAR
TPO - 60 MIL


INSTALLATION STEP #1

NOTE: ADDITIONAL 2" x 2" (50.8 mm x 50.8 mm) PIECE OF TPO NON-REINFORCED FLASHING WITH ROUND CORNERS MAY BE REQUIRED IF GAPS ARE PRESENT PRIOR TO OUTSIDE CORNER PLACEMENT. WELD INTO PLACE. (SEE NOTE #5)

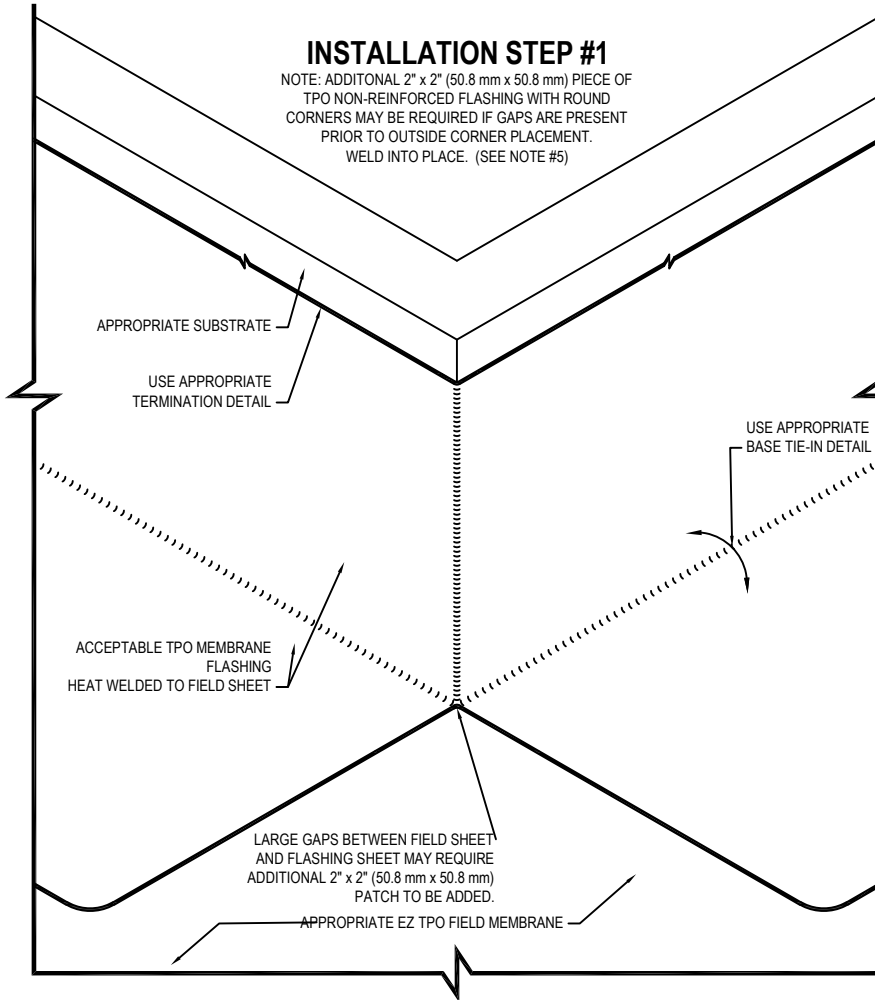

INSTALLATION STEP #2

CUT 6" x 6" (152.4 mm x 152.4 mm) PIECE OF TPO NON-REINFORCED FLASHING AND ROUND CORNERS. WELD INTO PLACE OVER 2"x2" PATCH. (SEE NOTE #5)

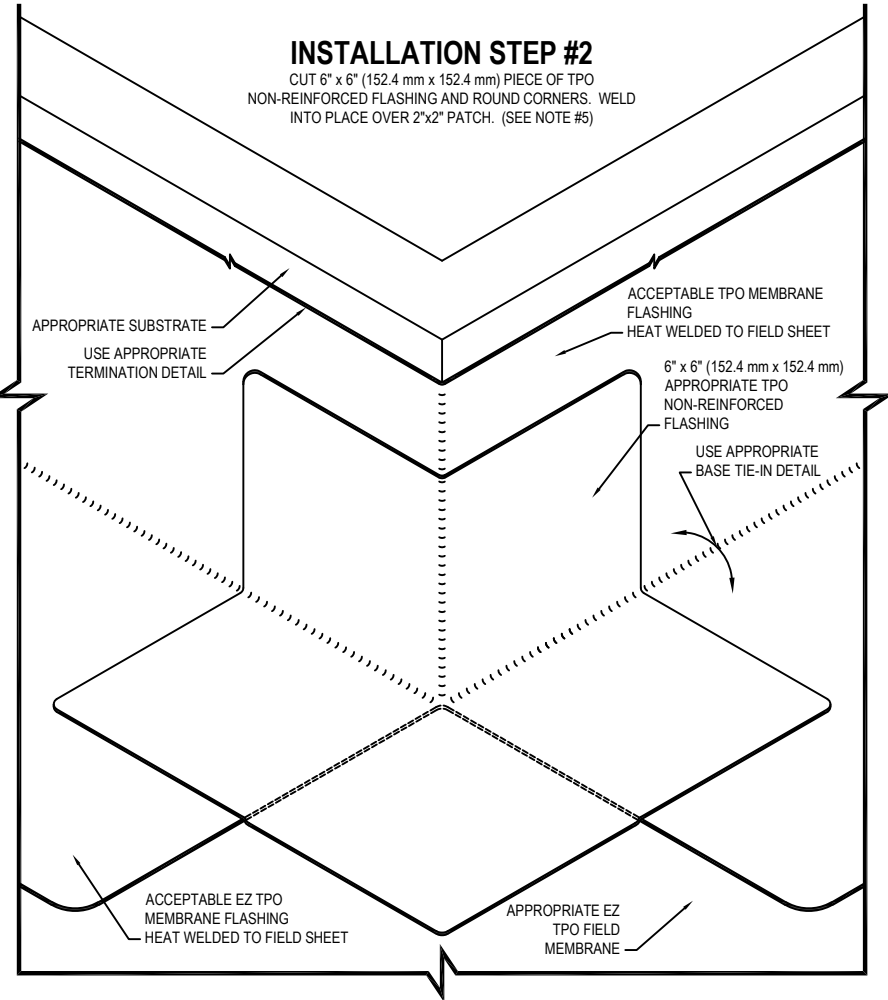

OUTSIDE CORNER
FIELD FABRICATED WITH TPO NON-REFINFORCED FLASHING

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

11/25/2025

DETAIL NO.

EZT-C-01A

NOT TO SCALE