


NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. USE AN ACCEPTABLE GENFLEX PRIMER TO CLEAN AND PRIME TPO MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.

STEP #4

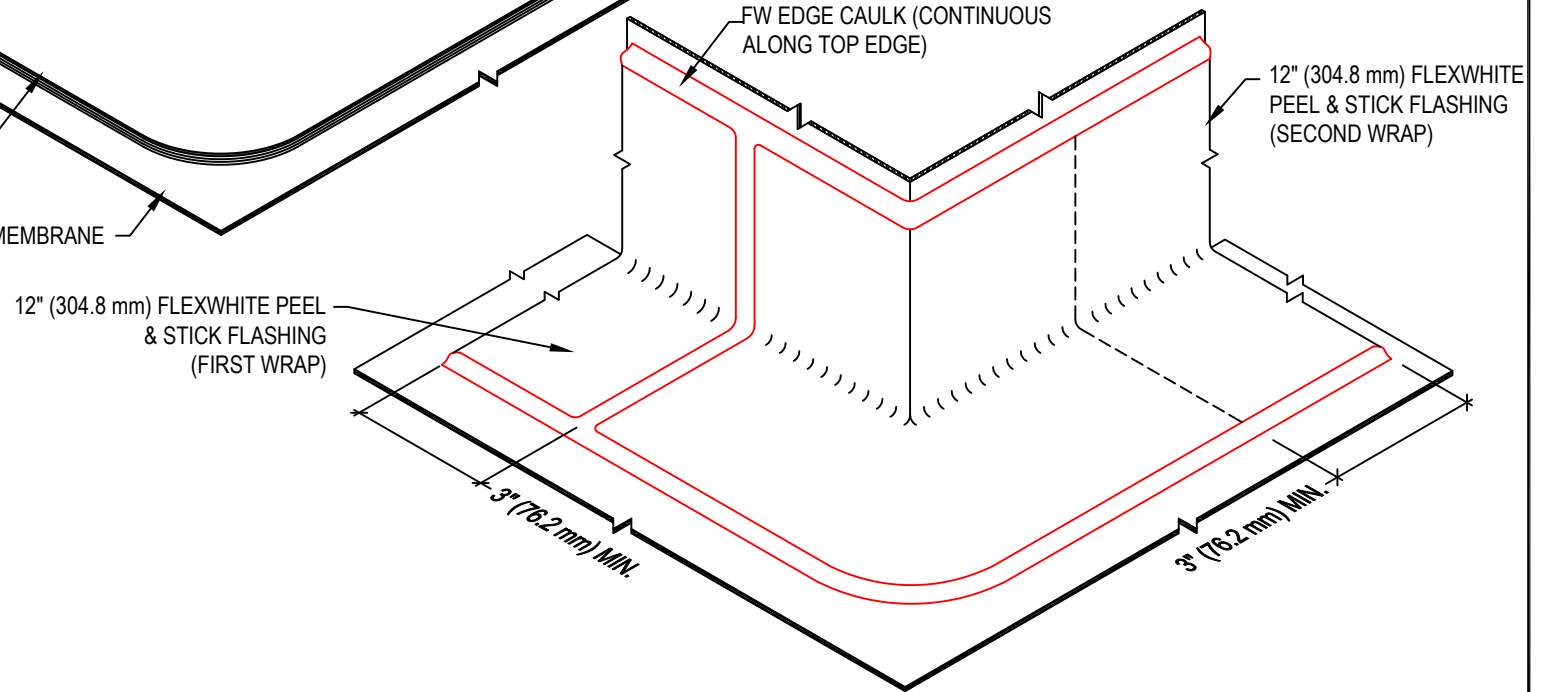

WARRANTY MEMBRANE REQUIREMENTS:

15-YEAR
TPO - 45 MIL

20-YEAR
TPO - 60 MIL



OUTSIDE CORNER AT WELDED WATERTIGHT CURB USING P&S FLASHING (FLANGES UNDER 2") - INSTALLATION STEPS 3 & 4

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/16/2026

DETAIL NO.

EZT-C-02B

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com