


**USE APPROPRIATE TERMINATION DETAIL**

PRE-MOLDED TPO INSIDE  
CORNER WELDED IN PLACE  
(SEE NOTE #5)

ACCEPTABLE TPO MEMBRANE  
AS FLASHING HEAT WELDED  
TO TPO FIELD  
SHEET (SEE NOTE #2)

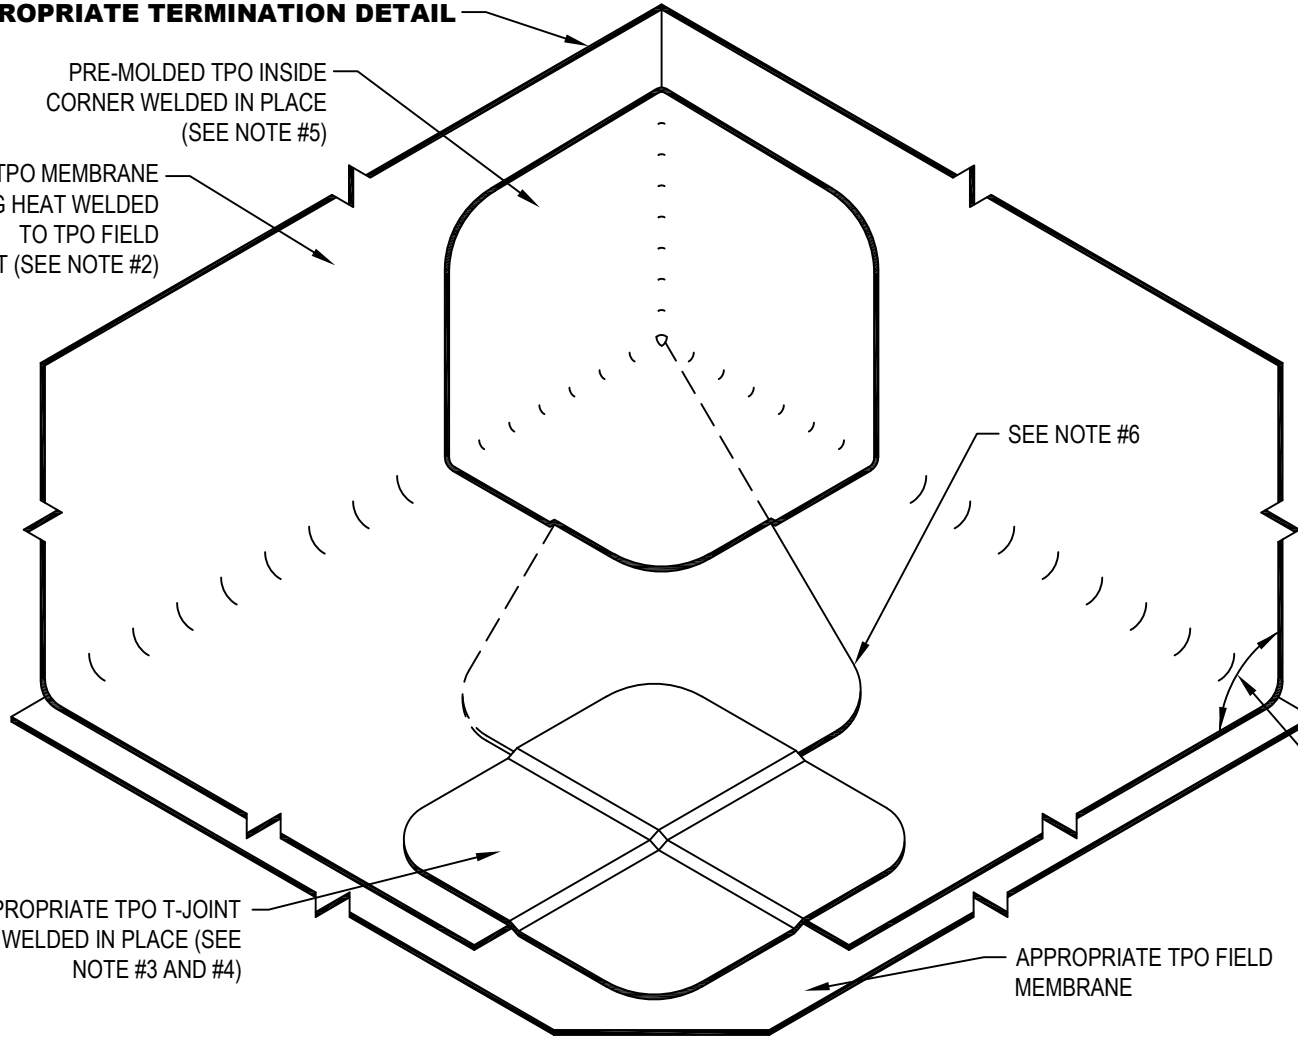

SEE NOTE #6

APPROPRIATE TPO T-JOINT  
COVER WELDED IN PLACE (SEE  
NOTE #3 AND #4)

APPROPRIATE TPO FIELD  
MEMBRANE

- NOTE:
1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
  2. REFER TO EZT-LS-01 OR EZT-LS-02 FOR WELD WIDTH.
  3. T-JOINT COVER REQUIRED FOR 60 MIL AND THICKER MEMBRANE ONLY.
  4. APPROPRIATE TPO NON-REINFORCED FLASHING (4" x 4" (101.6 x 101.6 mm) MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER.
  5. EZ TPO NON-REFINFORCED FLASHING MAY BE USED IN LIEU OF PRE-MOLDED EZ TPO INSIDE/OUTSIDE CORNER
  6. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

**USE APPROPRIATE  
BASE TIE-IN DETAIL**

**WARRANTY MEMBRANE REQUIREMENTS:**

**15-YEAR**  
TPO - 45 MIL  
**20-YEAR**  
TPO - 60 MIL



**INSIDE CORNER WITH SEPARATE WALL FLASHING**

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION  
DATE:  
**04/16/2026**

DETAIL NO.  
**EZT-C-04**

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE