


**USE APPROPRIATE TERMINATION DETAIL**

WELDED SPLICE (SEE NOTE #4)

**NOTE:**

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO EZT-LS-01 OR EZT-LS-02 FOR WELD WIDTH.
3. EZ TPO NON-REINFORCED FLASHING MAY BE USED IN LIEU OF PRE-MOLDED EZ TPO INSIDE/OUTSIDE CORNER
4. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

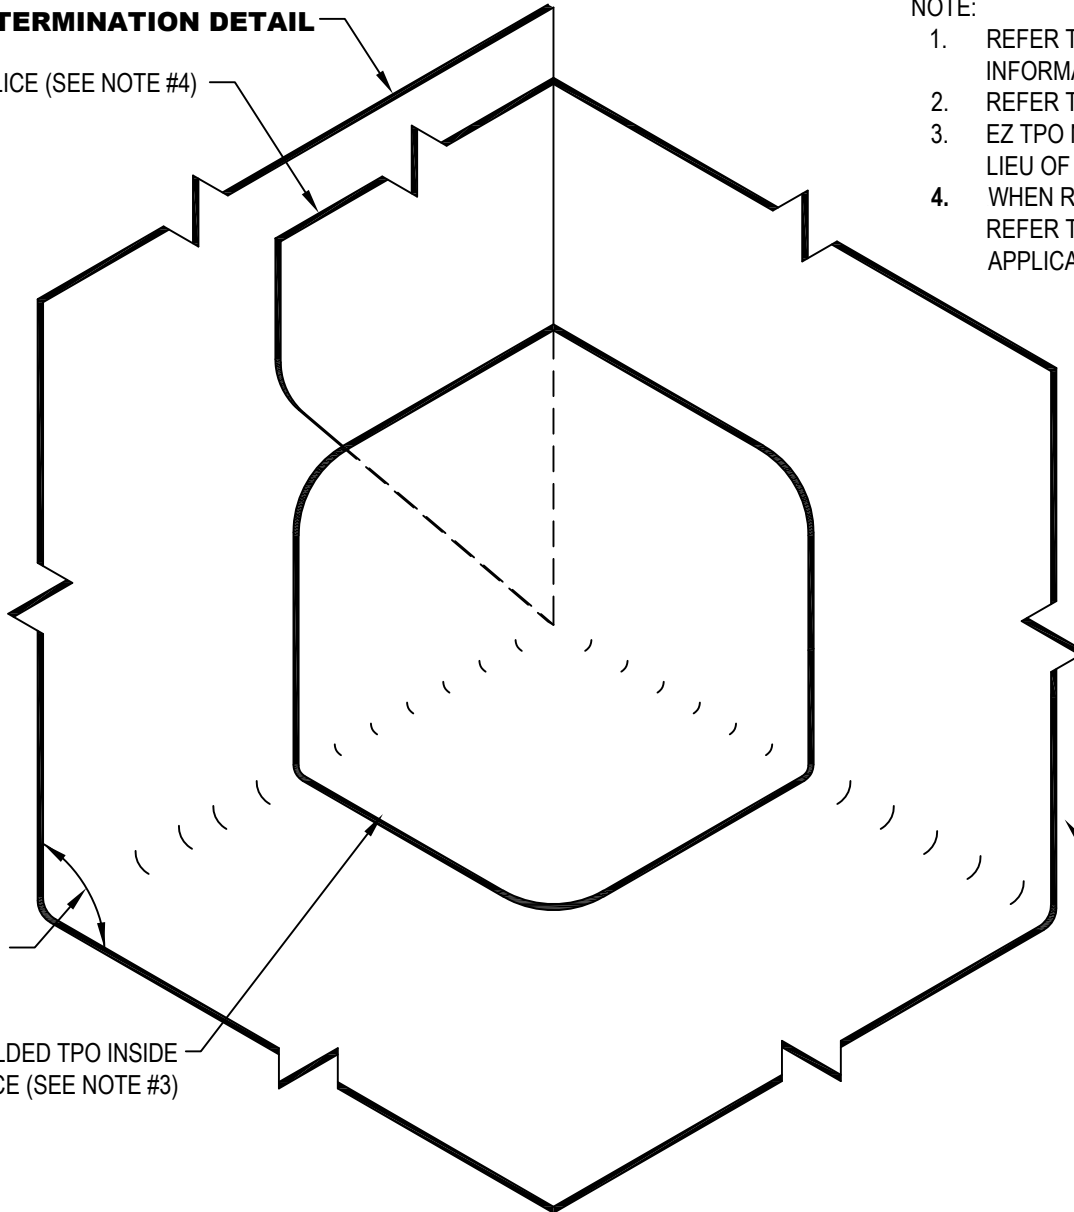

APPROPRIATE TPO FIELD MEMBRANE

**USE APPROPRIATE  
BASE TIE-IN DETAIL**

APPROPRIATE PRE-MOLDED TPO INSIDE  
CORNER WELDED IN PLACE (SEE NOTE #3)

**WARRANTY MEMBRANE REQUIREMENTS:**

**15-YEAR**  
TPO - 45 MIL  
**20-YEAR**  
TPO - 60 MIL



**INSIDE CORNER WITH CONTINUOUS WALL FLASHING**

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION  
DATE:

04/16/2026

DETAIL NO.

**EZT-C-05**

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com