

**WARRANTY MEMBRANE REQUIREMENTS:**

**15-YEAR**


TPO - 45 MIL

**20-YEAR**

TPO - 60 MIL

**NOTE:**

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-LS-01 OR EZT-LS-02 FOR WELD WIDTH.
3. **ANGLE CHANGE PATCH REQUIRED FOR ALL MEMBRANE THICKNESS.**
4. APPROPRIATE TPO NON-REINFORCED FLASHING (4" x 4" (101.6 mm x 101.6 mm) MIN. ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER.
5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

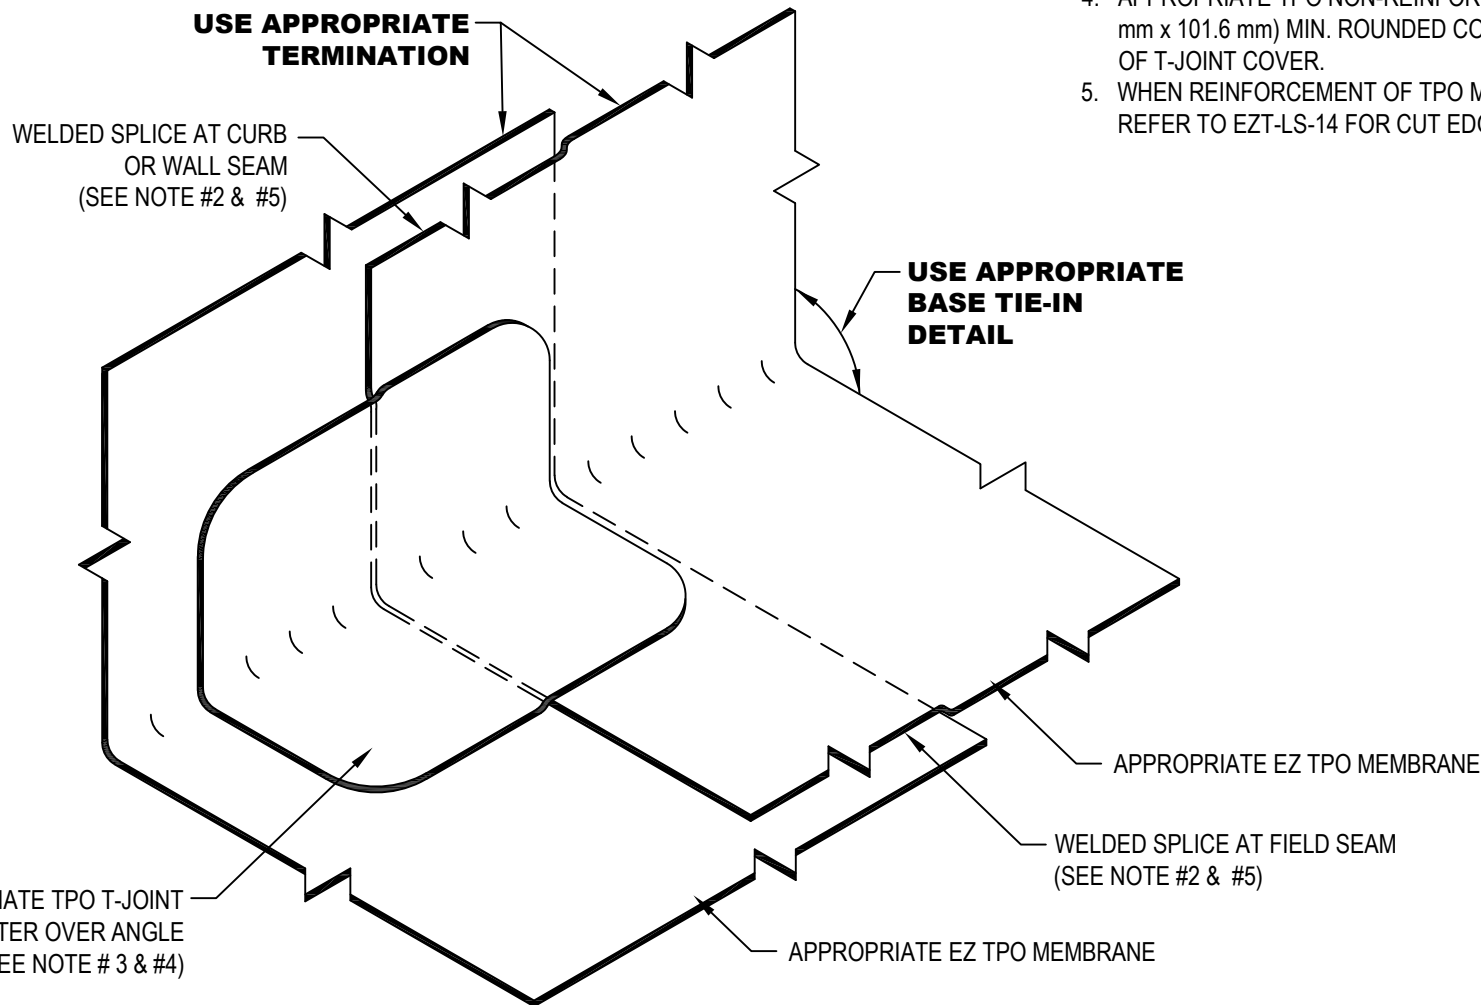

**FLASHING LAP SPLICE WITH ANGLE CHANGE PATCH (STRESS PATCH)**

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/20/2026

DETAIL NO.

**EZT-LS-13**

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE