

WARRANTY MEMBRANE REQUIREMENTS:

15-YEAR

TPO - 45 MIL

20-YEAR


TPO - 60 MIL

NOTE:


1. STEP #1 - APPLY CONTINUOUS BEAD OF GENFLEX WATER STOP CENTERED UNDER FASTENERS. ROUND ALL METAL CORNERS AND FASTEN METAL SCUPPER WITH APPROPRIATE FASTENERS.
2. STEP #2 - CENTER FLEXWHITE PEEL & STICK T-JOINT COVER OVER EACH CORNER OF SCUPPER AND WRAP TIGHTLY AROUND CORNER.
3. USE AN APPROPRIATE GENFLEX PRIMER TO CLEAN AND PRIME TPO MATING SURFACES PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.

USE APPROPRIATE TERMINATION

STEP #1

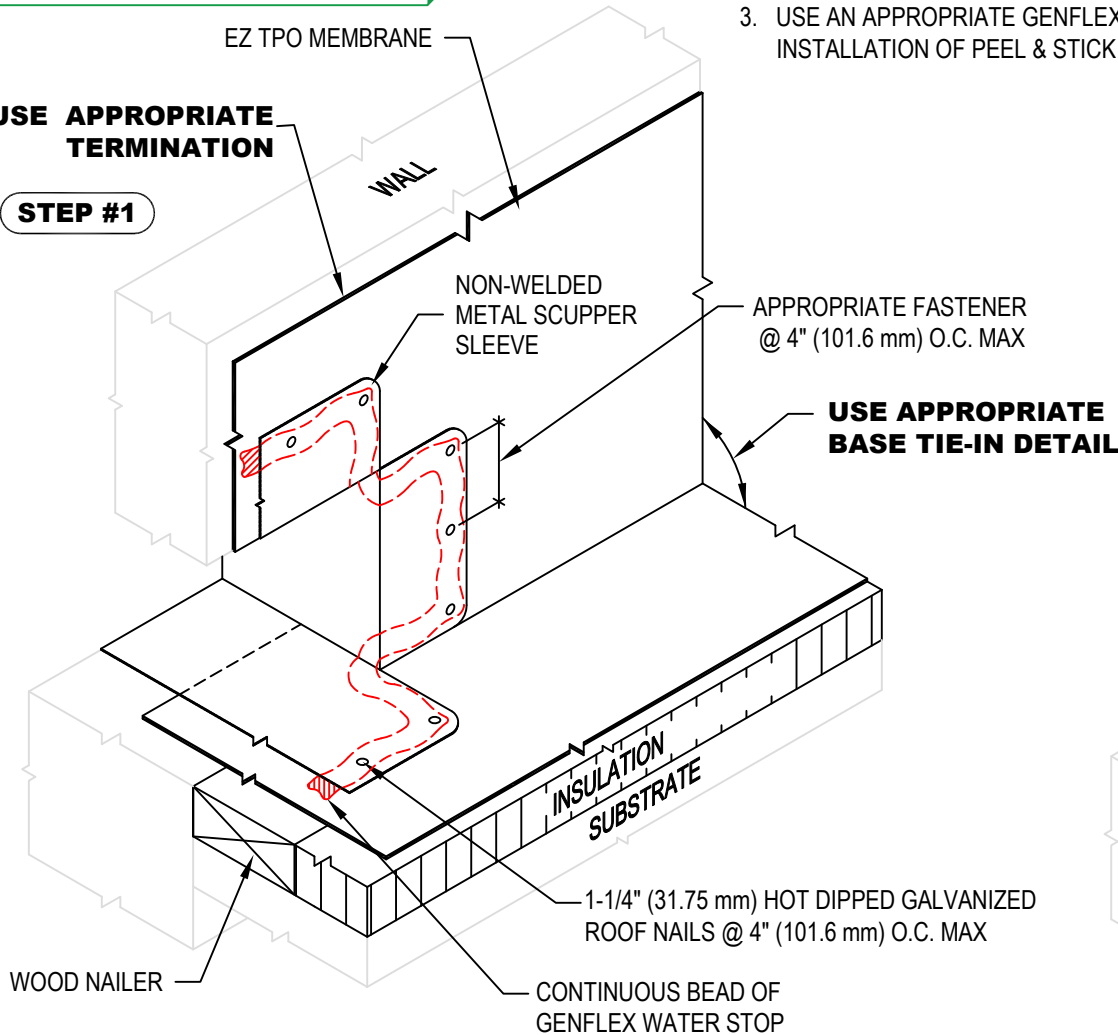

STEP #2

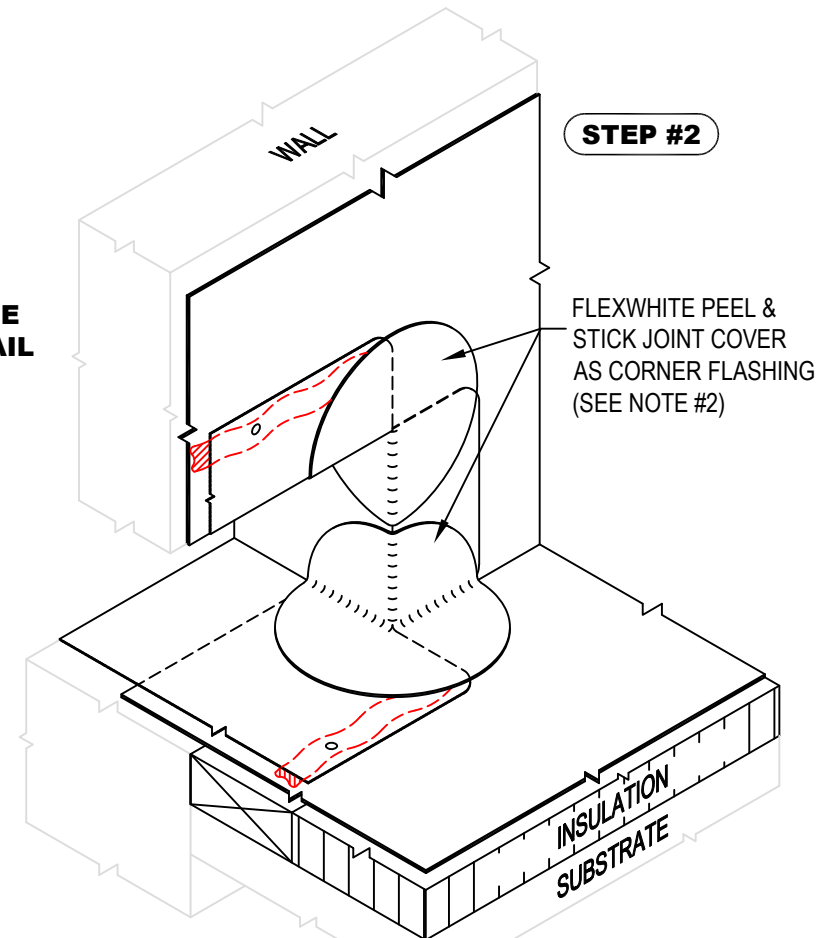

**THRU-WALL SCUPPER (NON-WELDED SLEEVE)
INSTALLATION STEPS 1 & 2**

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/20/2026

DETAIL NO.

EZT-S-03A

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com