


**NOTE:**

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-FB-LS-01 OR EZT-FB-LS-03 FOR WELD WIDTH.
3. REFER TO DETAIL EZT-FB-BT-08 FOR THERMOPLASTIC COATED METAL SPLICE.
4. REFER TO DETAILS EZT-FB-C-06 & EZT-FB-C-08 FOR CORNER FLASHING APPLICATION.
5. INSTALL METAL WORK TO SMACNA RECOMMENDATIONS.
6. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES.
7. FLANGE OF METAL MUST BE FULLY SUPPORTED BY WOOD AND TERMINATED AT LEAST 1/2" (13 mm) FROM EDGE OF WOOD.
8. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.
9. REFER TO GENFLEX PDS SHEETS AND APPROPRIATE GUIDES FOR LIST OF COMPATIBLE SUBSTRATES AND APPLICABLE ATTACHMENT METHODS.



**WARRANTY MEMBRANE REQUIREMENTS:**  
**15-YEAR**  
 TPO - 45 MIL  
**20-YEAR**  
 TPO - 60 MIL

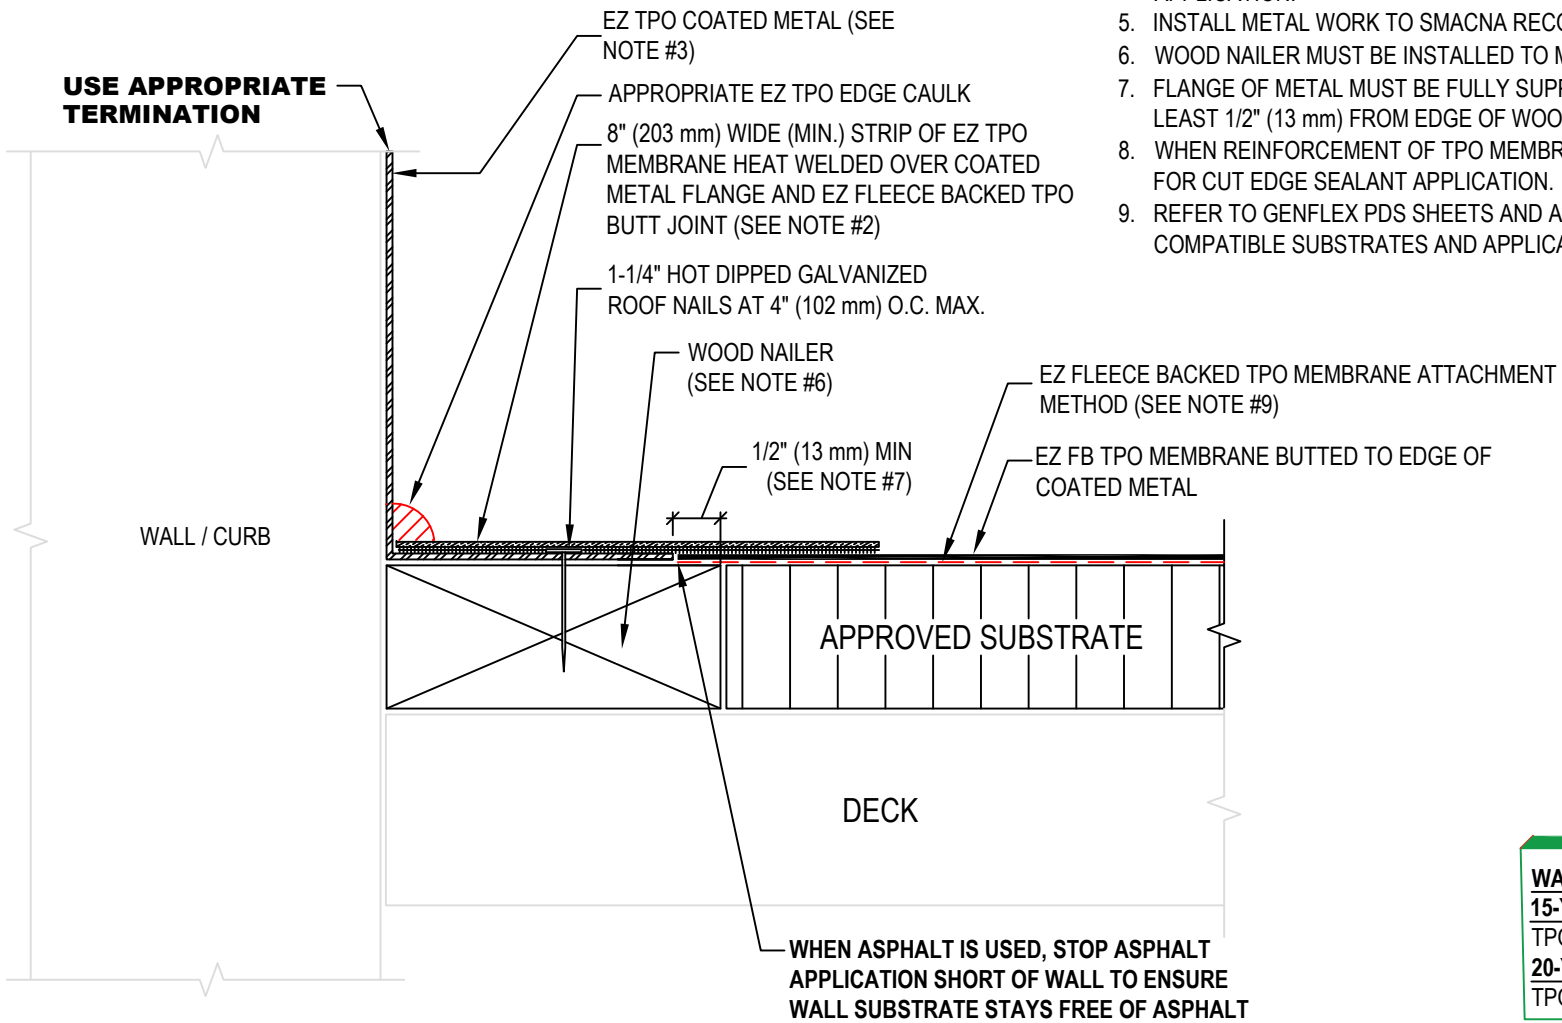

**BASE TIE-IN WITH EZ TPO COATED METAL (WITHOUT BRAKE)**

MATERIAL: EZ FLEECE BACKED TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/20/2026

DETAIL NO.

EZT-FB-BT-07

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com