


**NOTE:**

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-PS-LS-01 FOR WELD WIDTH.
3. T-JOINT COVER REQUIRED FOR MEMBRANE WITH A GAUGE GREATER THAN .045.
4. GENFLEX NON-REINFORCED FLASHING (4" x 4" (101.6 mm x 101.6mm) MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER.
5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-PS-LS-04 FOR CUT EDGE SEALANT APPLICATION.

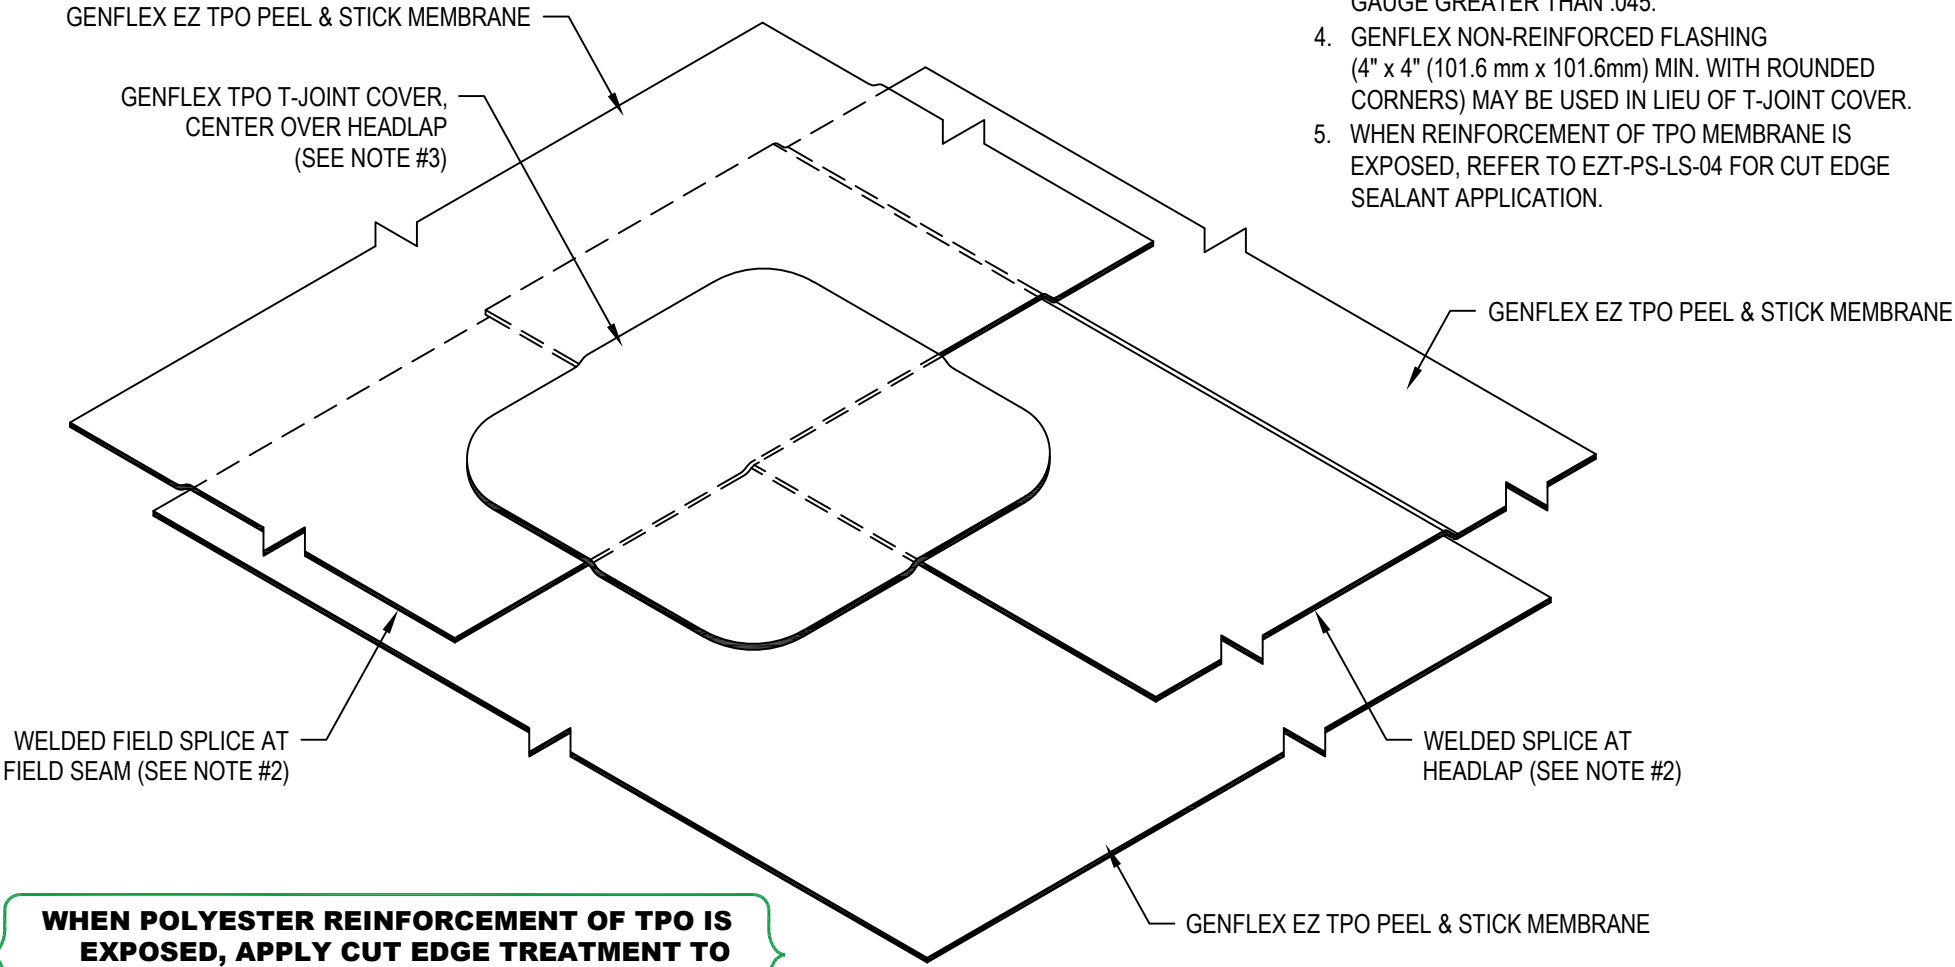

**WHEN POLYESTER REINFORCEMENT OF TPO IS EXPOSED, APPLY CUT EDGE TREATMENT TO ENTIRE EXPOSED EDGE. REFER TO EZT-PS-LS-04.**

	<b>LAP SPLICE WITH LAP UNDER FIELD SEAM USING T-JOINT COVER</b>		MAXIMUM WARRANTY: 20 Years	
	MATERIAL: EZ TPO P&S	ACCEPTABLE SYSTEMS: ADHERED	ISSUE / REVISION DATE: <b>04/20/2026</b>	DETAIL NO. <b>EZT-PS-LS-03</b>
GENFLEX: (800) 443-4272 www.genflex.com			NOT TO SCALE	