


NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-PS-LS-01 FOR WELD WIDTH.



WHEN POLYESTER REINFORCEMENT OF TPO IS EXPOSED, APPLY CUT EDGE SEALANT TO ENTIRE EXPOSED EDGE.

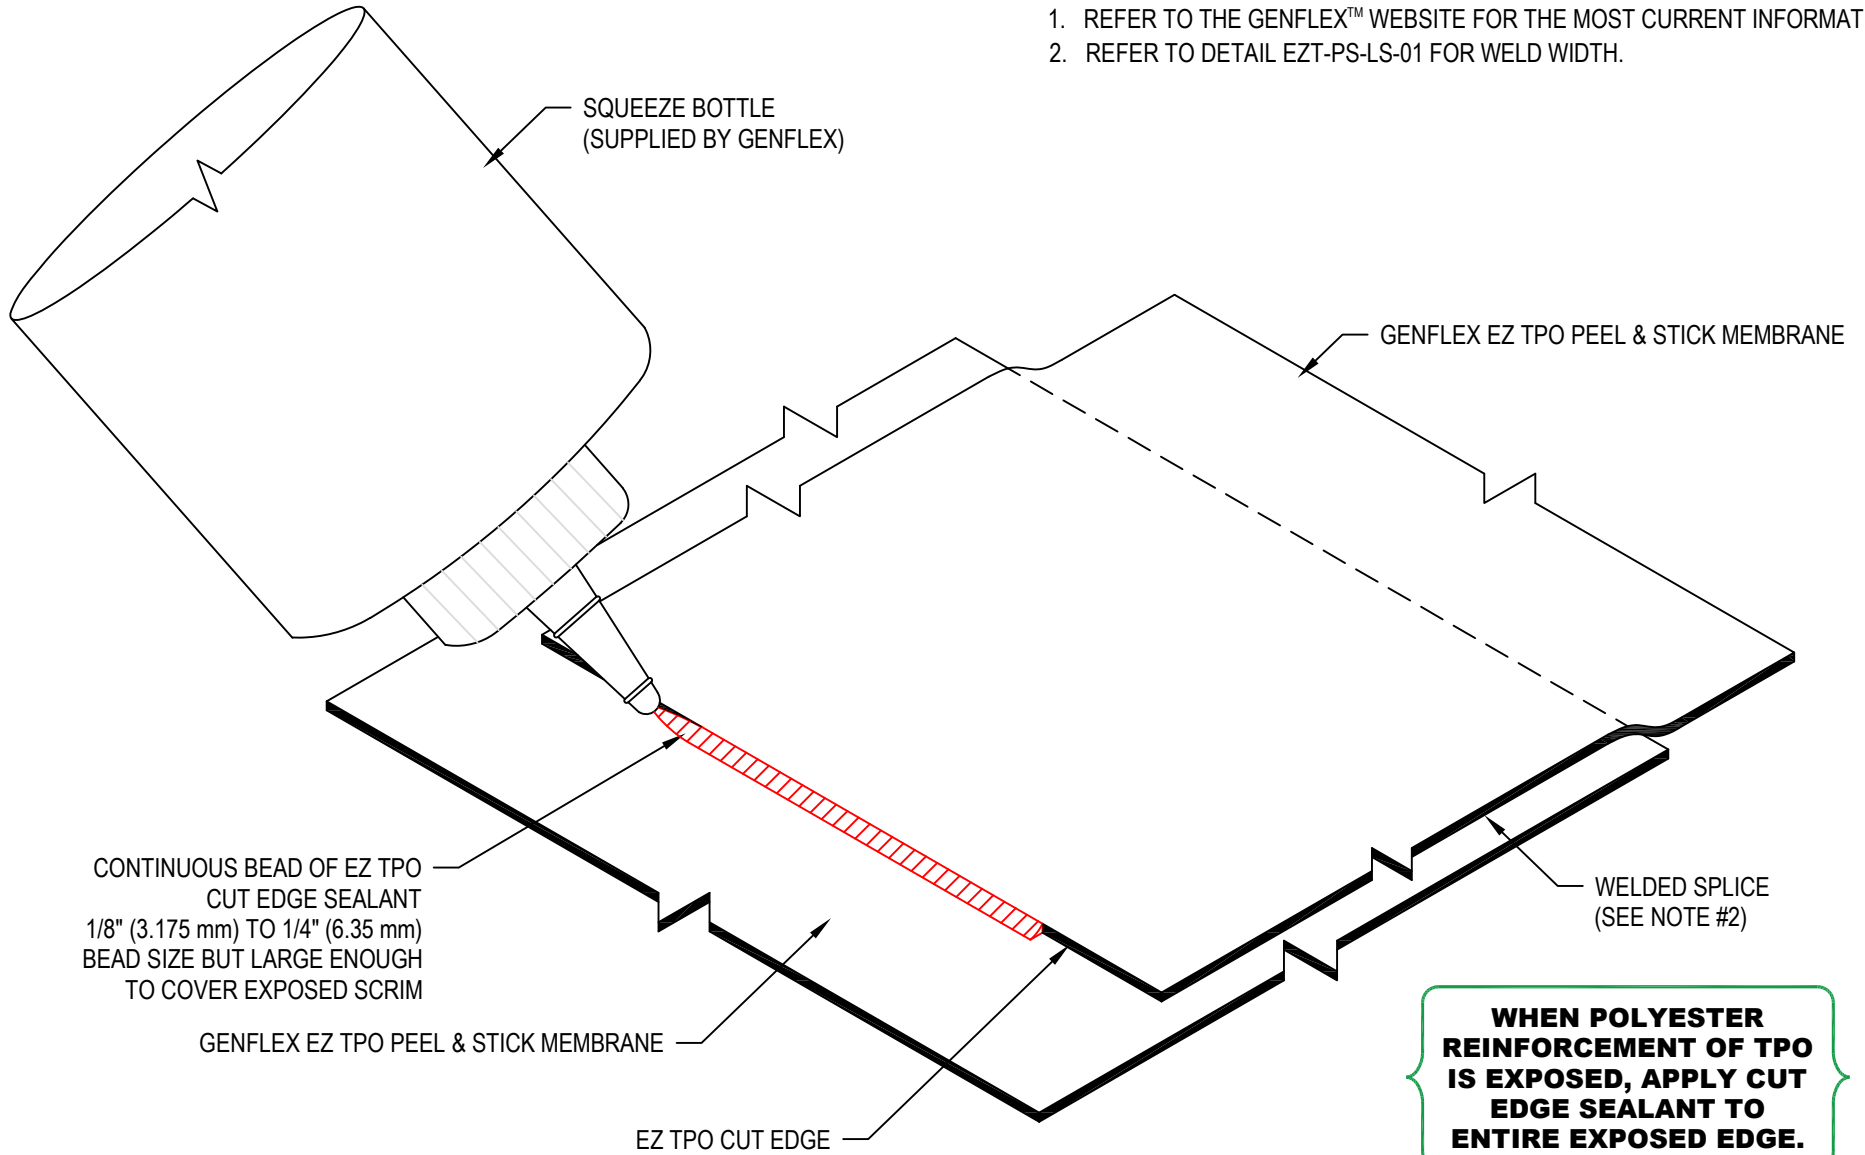

CUT EDGE TREATMENT APPLICATION

MATERIAL: EZ TPO P&S

ACCEPTABLE SYSTEMS: ADHERED

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:
04/20/2026

DETAIL NO.
EZT-PS-LS-04

GENFLEX: (800) 443-4272 www.genflex.com

NOT TO SCALE