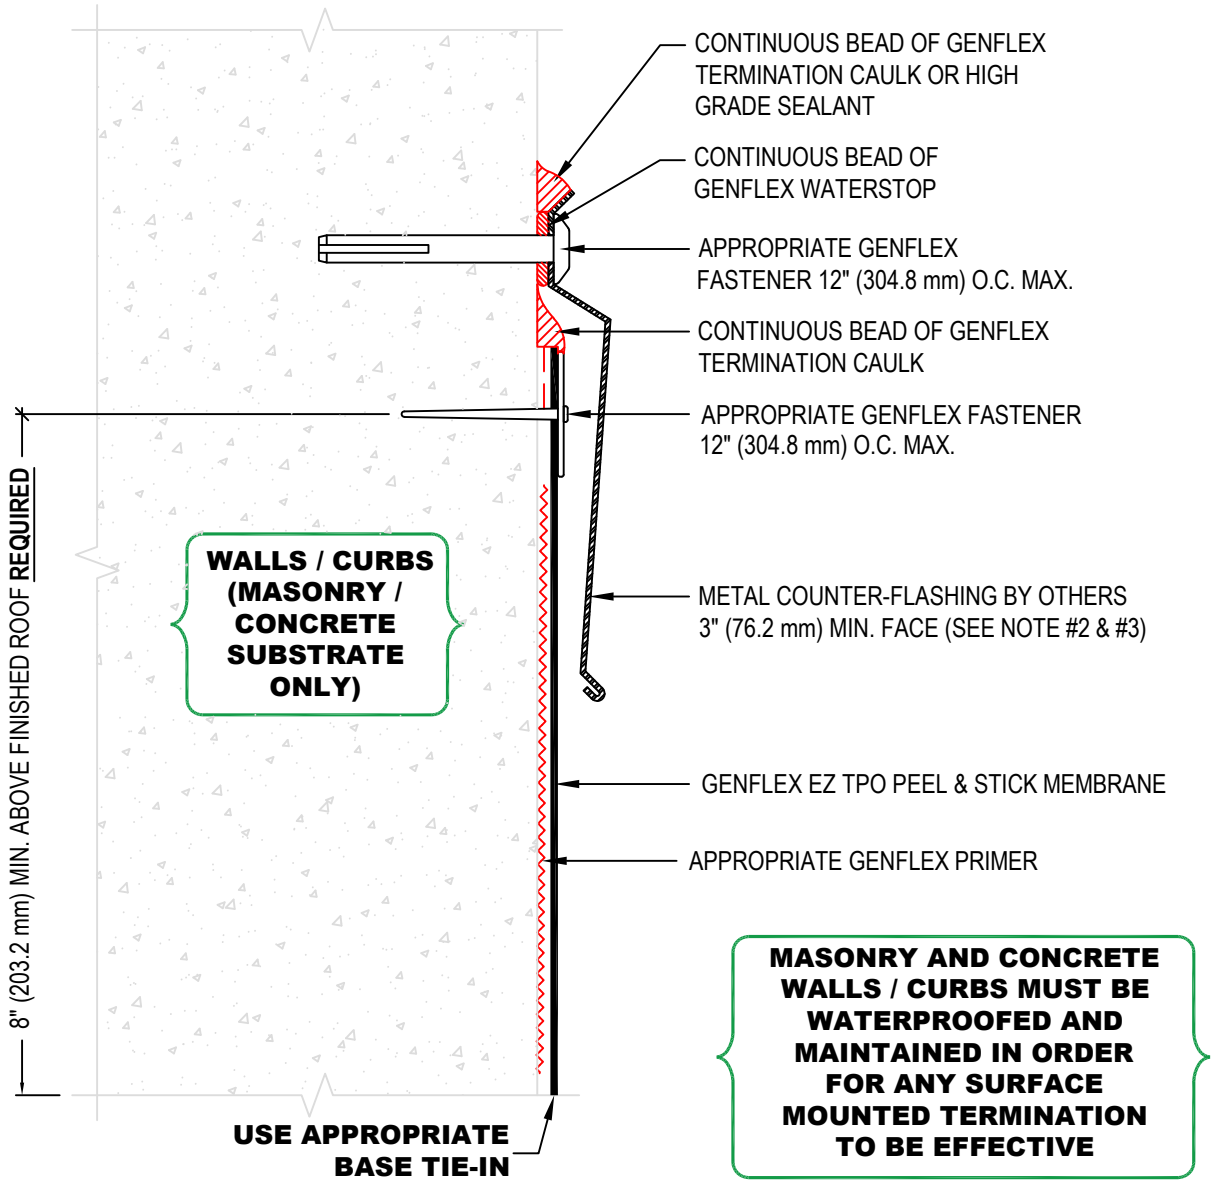

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REGULAR MAINTENANCE OF COUNTER-FLASHING AND SEALANTS REQUIRED. NOT INCLUDED AS PART OF THE GENFLEX WARRANTY.
3. METAL COUNTER-FLASHING SHALL BE 24 GAUGE PRE-FINISHED STEEL OR .032" MIN. ALUMINUM FORMED WITH HEMMED LOWER EDGE.
4. INSTALL GENFLEX TERMINATION BAR WITH 1/4" (6.35 mm) GAP BETWEEN ADJOINING SECTIONS.
5. INSTALL METAL WORK IN ACCORDANCE WITH CURRENT SMACNA RECOMMENDATIONS.
6. STANDARD 0.060" EZ TPO MEMBRANE WITH APPROPRIATE MEMBRANE ADHESIVE CAN BE USED AS VERTICAL WALL FLASHING IN LIEU OF EZ TPO PEEL & STICK MEMBRANE. APPROPRIATE MEMBRANE ADHESIVE MUST BE USED.
7. APPROPRIATE PRIMER REQUIRED ON ALL VERTICAL SURFACES WHEN EZ TPO PEEL & STICK MEMBRANE IS USED FOR FLASHING.
8. REFER TO TPO APPLICATION GUIDE FOR ACCEPTABLE FLASHING SUBSTRATES.
9. IF INTERMEDIATE ATTACHMENT IS REQUIRED, COMPLETE AS FOLLOWS:
   - UP TO 5' (1.52 m) WALL HEIGHT- NONE REQUIRED
   - 5' (1.52 m) - 10' (3.05 m) WALL HEIGHT - ONE ATTACHMENT AT 1/2 THE WALL HEIGHT
   - ABOVE 10' (3.05 m) - ONE ATTACHMENT EVERY 3' (0.91 m)

GENFLEX Roofing Systems

TERMINATION WITH SURFACE MOUNTED COUNTER-FLASHING

MATERIAL: EZ TPO P&S | ACCEPTABLE SYSTEMS: ADHERED

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE: 04/20/2026

DETAIL NO. EZT-PS-T-11

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com