


NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. INSTALL GENFLEX TERMINATION BAR WITH 1/4" (6.35 mm) GAP BETWEEN ADJOINING SECTIONS.
3. TERMINATION BAR MUST BE CUT AT INSIDE AND OUTSIDE CORNERS. **DO NOT BEND AROUND CORNERS.**
4. TERMINATION BAR MUST BE FASTENED WITHIN 1" (25.4 mm) MAX. OF ALL SECTION ENDS.
5. FOR SINGLE LIP TERMINATION BARS, ENSURE THAT THE TOP LIP FACES UPWARD.

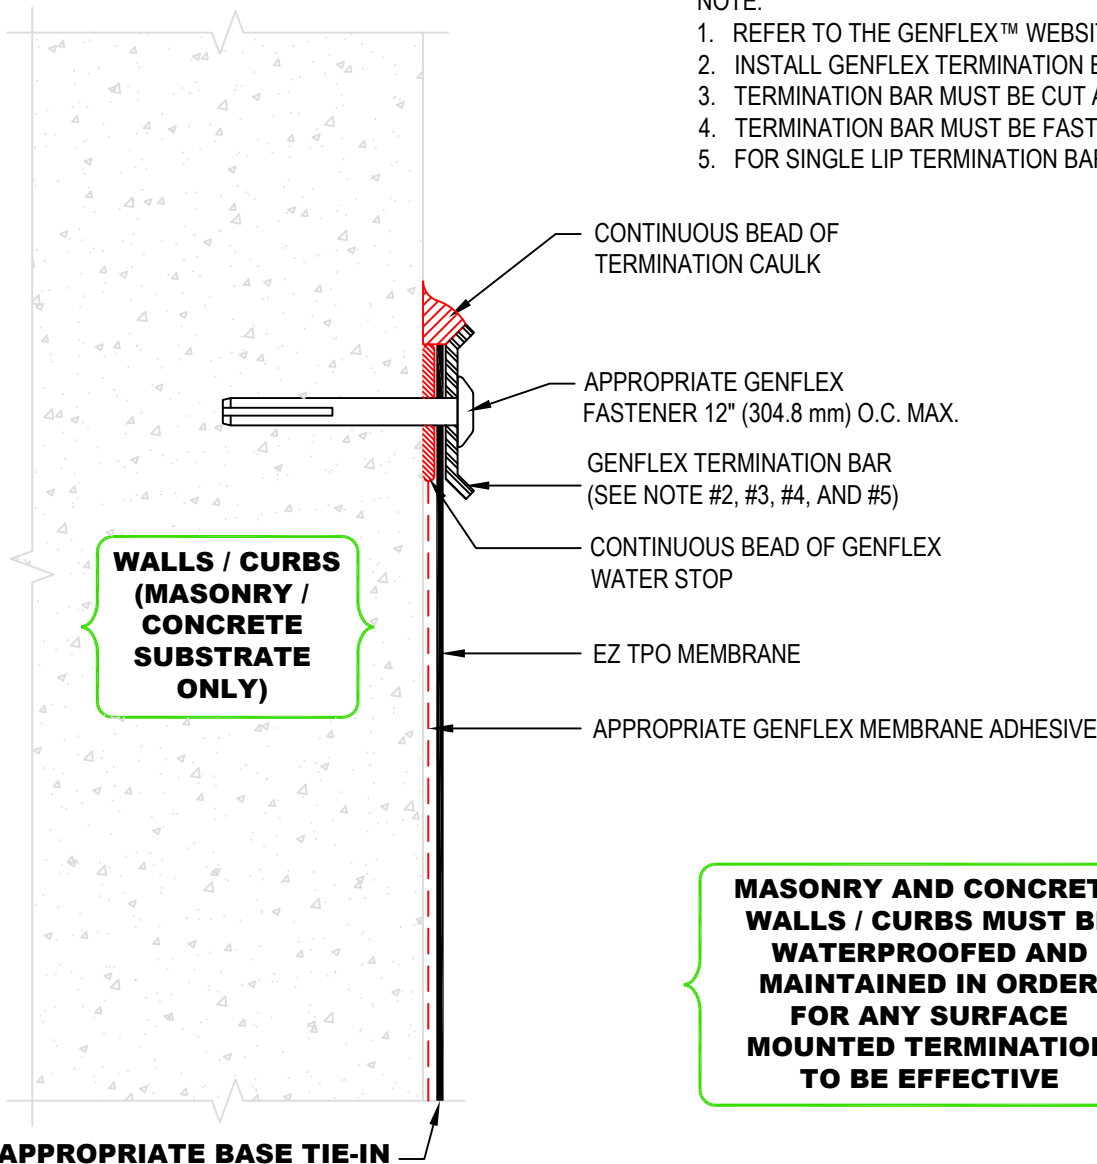

**WARRANTY MEMBRANE REQUIREMENTS:**

**15-YEAR**  
TPO - 45 MIL  
**20-YEAR**  
TPO - 60 MIL



**TERMINATION WITH GENFLEX TERMINATION BAR**

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION DATE:

04/20/2026

DETAIL NO.

**EZT-T-01**

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com