


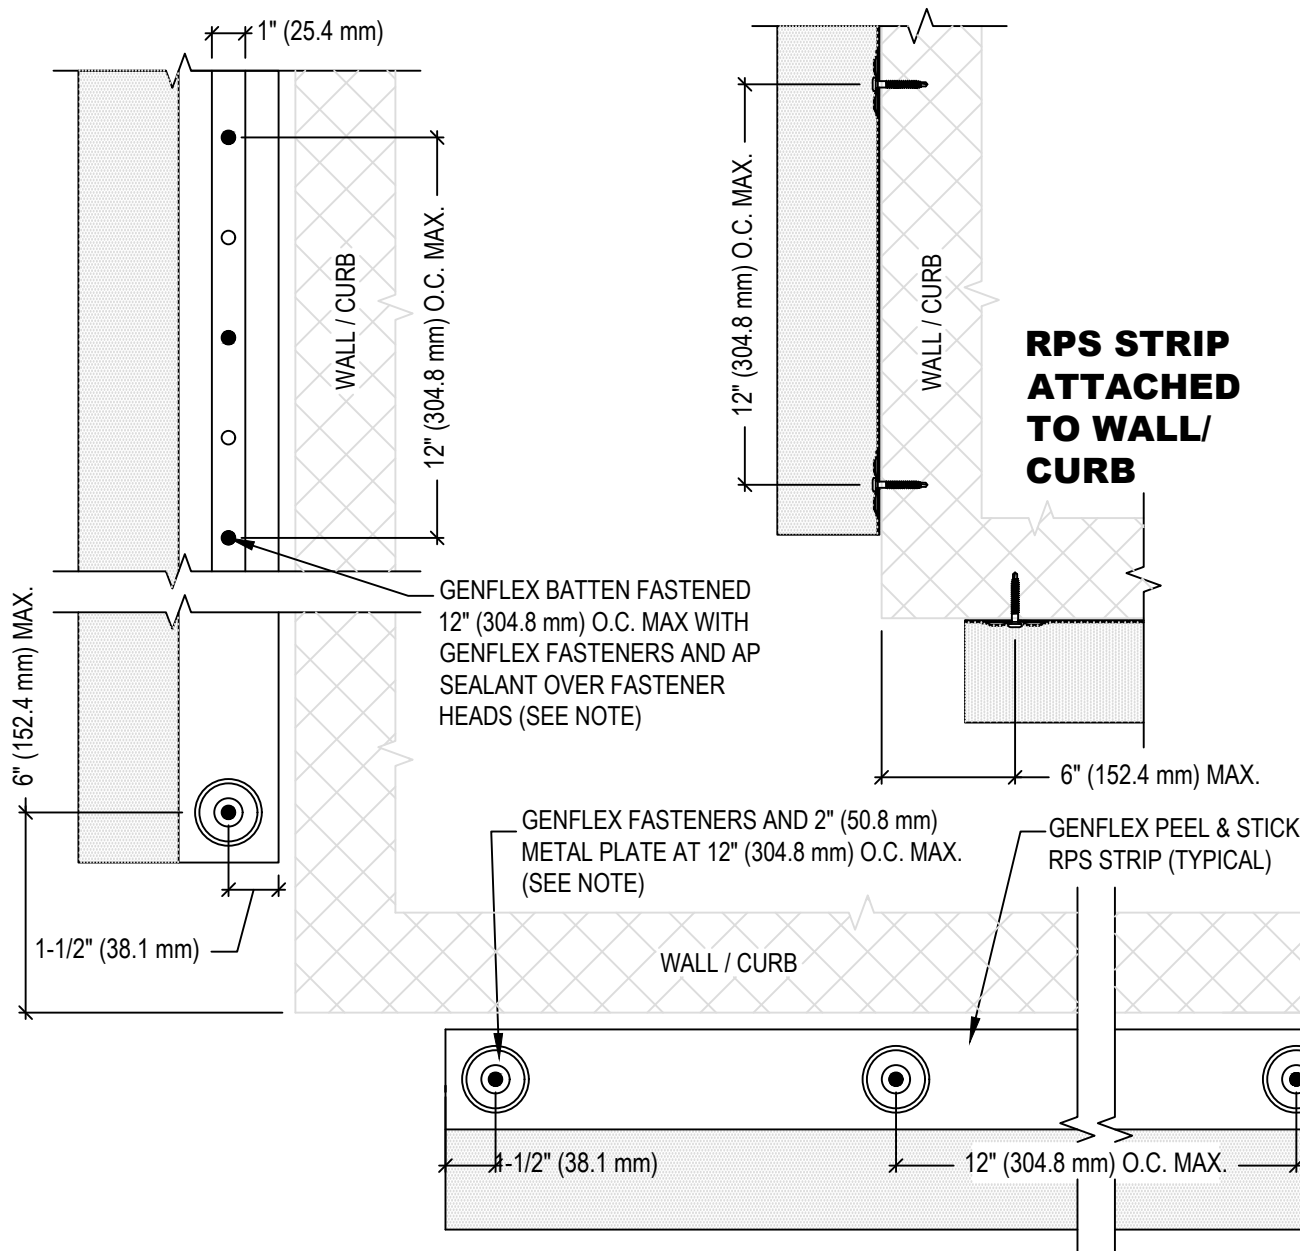

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. MAXIMUM 10" (254 mm) LONG FASTENERS. (NOTE: WOOD BLOCKING MAY BE SUBSTITUTED FOR INSULATION TO REDUCE FASTENER LENGTH REQUIREMENTS.)
3. GENFLEX BATTEN STRIP MAY BE USED TO SECURE THE PEEL & STICK RPS STRIP TO THE WALL. METAL BATTEN STRIP ACCEPTABLE FOR WOOD OR METAL SUBSTRATE. METAL BATTEN MUST BE USED WITH MASONRY SUBSTRATE. METAL BATTEN REQUIRED FOR 20 YEAR WARRANTIES.

BASE FLASHING AND TERMINATION NOT SHOWN FOR CLARITY. REFER TO APPROPRIATE TERMINATION & BASE TIE-IN DETAILS

THIS DETAIL IS FOR LAYOUT PURPOSES ONLY AND IS NON-SPECIFIC. REFER TO APPROPRIATE BASE TIE-IN DETAILS FOR SYSTEM SPECIFIC SECUREMENT OPTIONS

WARRANTY MEMBRANE REQUIREMENTS:
 UP TO 15-YEAR: 45 mil
 UP TO 20-YEAR: 60 mil



QUICKSEAM RPF LAYOUT AT OUTSIDE CORNER

MATERIAL: EPDM

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: SEE TABLE

ISSUE / REVISION
DATE:
05/01/2026

DETAIL NO.

BT-14

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com