


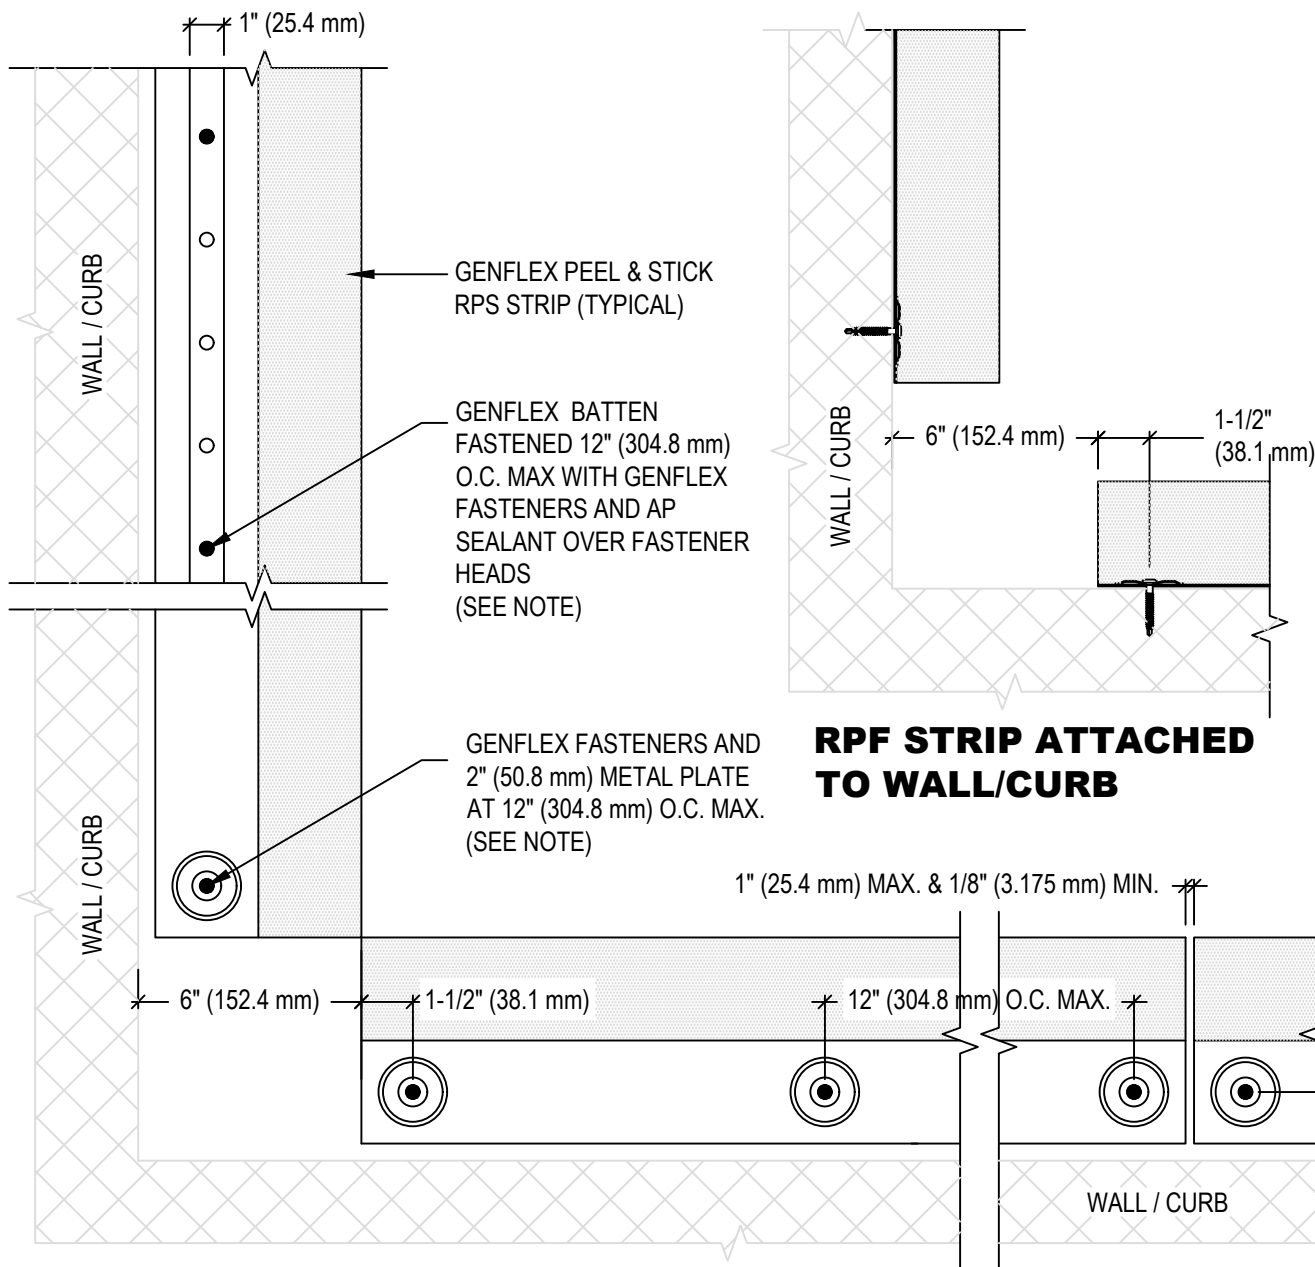

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. MAXIMUM 10" (254 mm) LONG FASTENERS. (NOTE: WOOD BLOCKING MAY BE SUBSTITUTED FOR INSULATION TO REDUCE FASTENER LENGTH REQUIREMENTS.
3. GENFLEX BATTEN STRIP MAY BE USED TO SECURE THE PEEL & STICK RPS STRIP TO THE WALL. METAL BATTEN STRIP ACCEPTABLE FOR WOOD OR METAL SUBSTRATE. METAL BATTEN MUST BE USED WITH MASONRY SUBSTRATE. METAL BATTEN REQUIRED FOR 20-25 YEAR WARRANTIES.

BASE FLASHING AND TERMINATION NOT SHOWN FOR CLARITY. REFER TO APPROPRIATE TERMINATION & BASE TIE-IN DETAILS

THIS DETAIL IS FOR LAYOUT PURPOSE ONLY AND IS NON-SPECIFIC. REFER TO APPROPRIATE BASE TIE-IN DETAILS FOR SYSTEM SPECIFIC SECUREMENT OPTIONS

WARRANTY MEMBRANE REQUIREMENTS:

UP TO 15-YEAR: 45 mil
UP TO 20-YEAR: 60 mil



QUICKSEAM RPF LAYOUT AT INSIDE CORNER

MATERIAL: EPDM

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: SEE TABLE

ISSUE / REVISION
DATE:

05/01/2026

DETAIL NO.

BT-15

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com