




NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. BACK-NAILING STRIPS ARE REQUIRED ON ALL SLOPES GREATER THAN 1:12 (8.3%).
3. REFER TO BACK-NAILING REQUIREMENTS IN THE MODIFIED BITUMEN SYSTEM DESIGN GUIDE.
4. WOOD NAILERS MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES.
5. ALL SHEET METAL IS TO BE INSTALLED PER SMACNA GUIDELINES.
6. FOR HEAT FUSED MEMBRANE APPLICATIONS, SET METAL FLASHING ONTO HEATED SOFTENED MEMBRANE.
7. MEMBRANE END LAPS ARE TO BE A MINIMUM 6" (152.4 mm) AND ADHERED AT ALL MEMBRANE TO MEMBRANE SEAMS.
8. MEMBRANE LAPS AT FLANGED METAL TO BE 3" (76.2 mm) MINIMUM AND FULLY BONDED TO PRIMED METAL SURFACE.

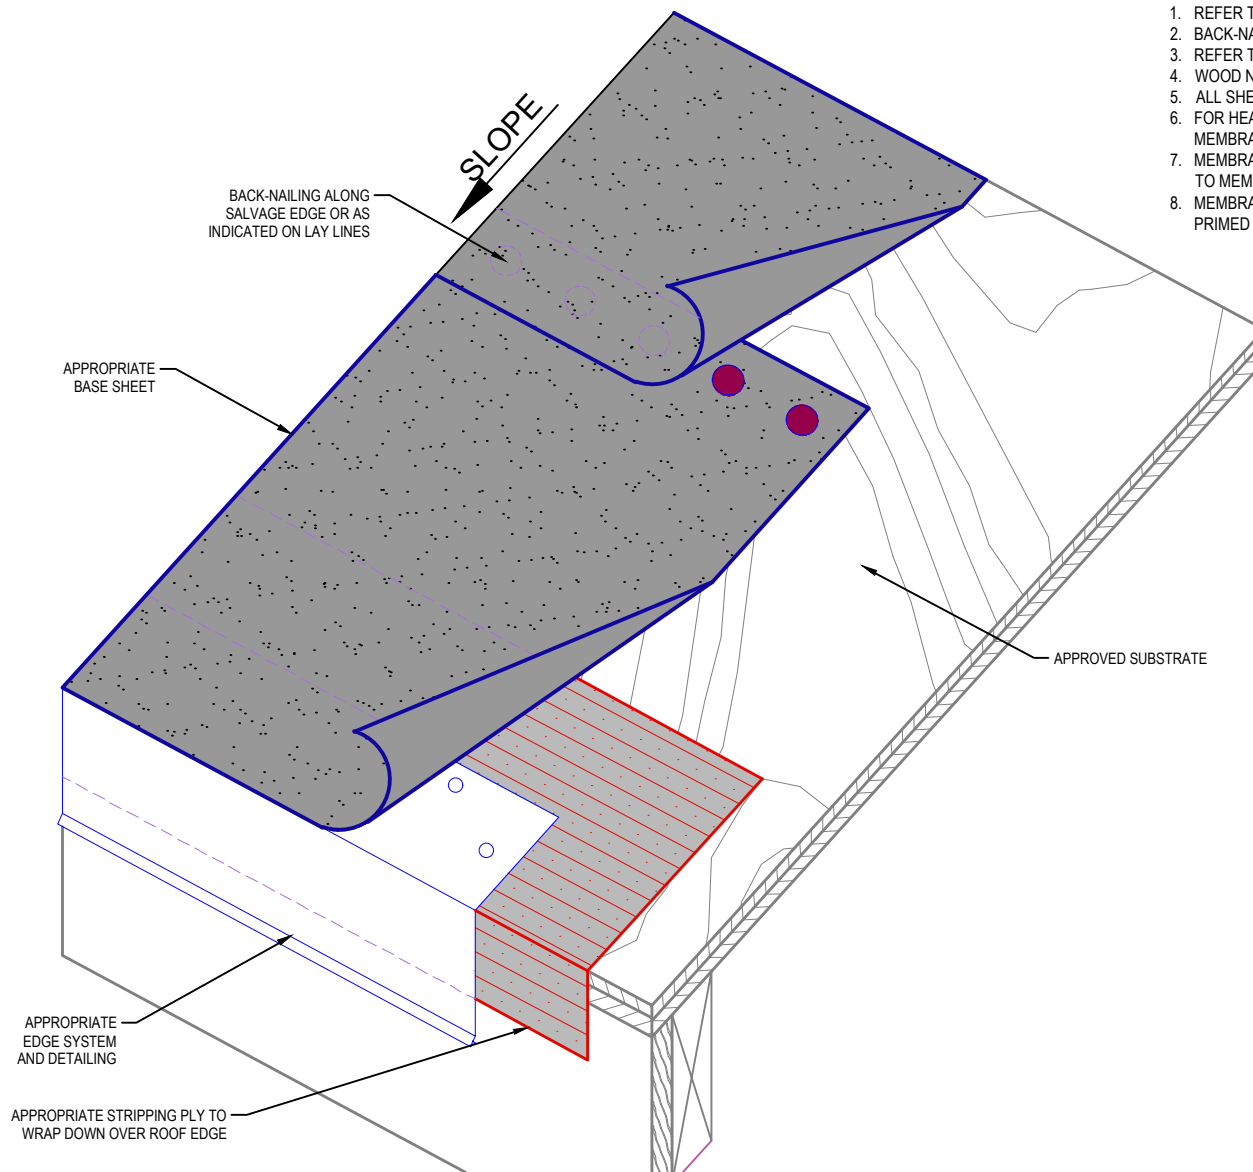

**BACK NAILING DIRECT TO DECK
SBS SA APPLICATION**

GENFLEX

ACCEPTABLE SYSTEMS: **SBS SELF-ADHERED**

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

06/10/2026

DETAIL NO.

MBSA-LS-9

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com