



ROOF TO WALL EXPANSION JOINT

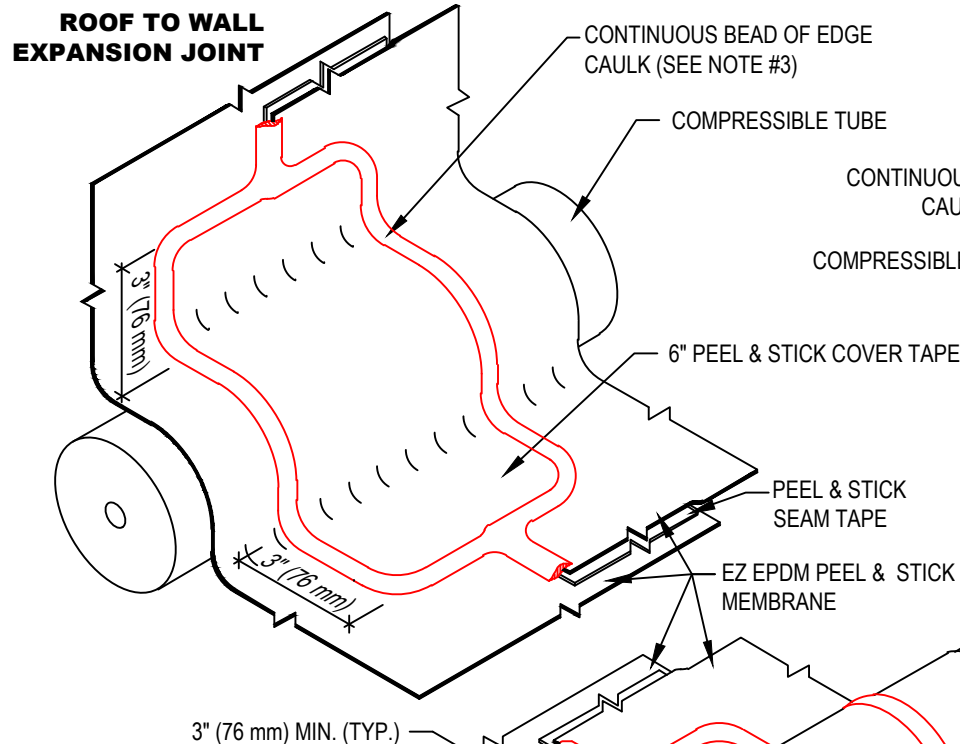


CURB TO CURB EXPANSION JOINT

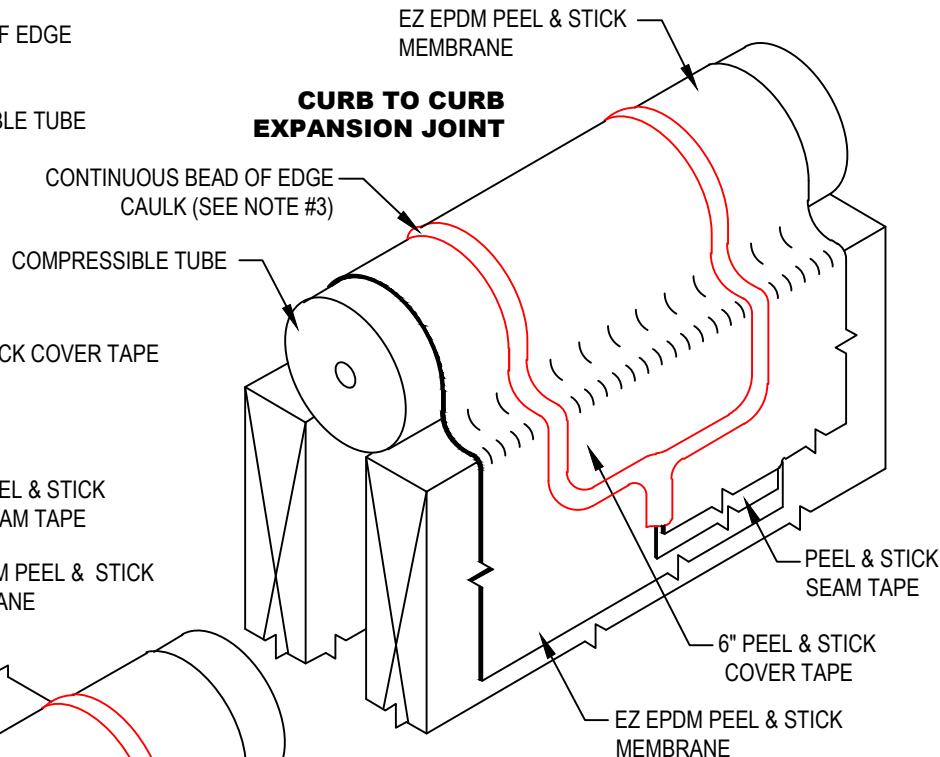

CONTINUOUS BEAD OF EDGE
CAULK (SEE NOTE #3)

**BASE FLASHING AND
TERMINATIONS NOT
SHOWN FOR CLARITY.
REFER TO APPROPRIATE
TERMINATION & BASE
TIE-IN DETAILS.**

ROOF TO ROOF EXPANSION JOINT

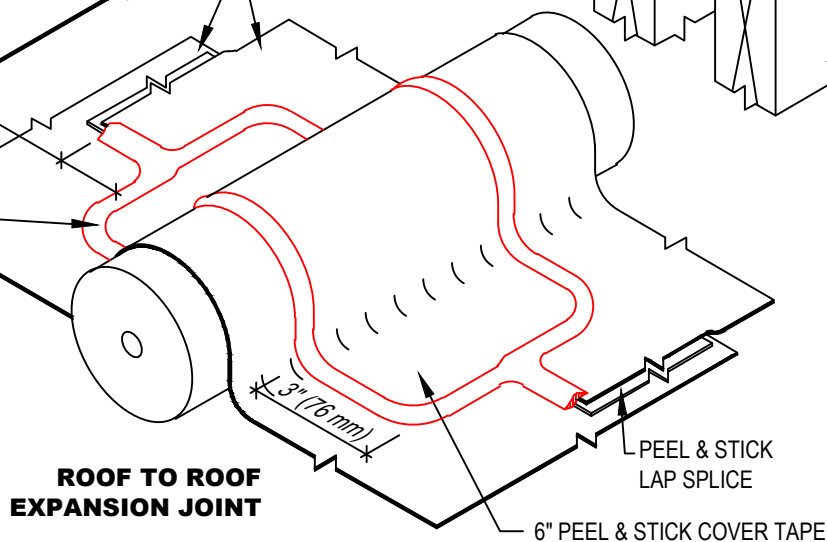

NOTE:

1. REFER TO GENFLEX™ WEBSITE FOR THE MOST CURRENT INFORMATION.
2. USE GENPRIME, CLEAR PRIMER OR ALL PURPOSE LVOC PRIMER TO CLEAN AND PRIME EPDM MATING SURFACE PRIOR TO INSTALLATION OF PEEL & STICK PRODUCTS.
3. APPLY EDGE CAULK AS SHOWN. REFER TO EZE-PS-LS-04 FOR SEAM EDGE TREATMENT.
4. EXTRA CLEANING IS REQUIRED AT FACTORY SPLICE AREAS AND OTHER AREAS WHERE EXCESS DUSTING AGENT MAY HAVE



LAP SPLICE AT EXPANSION JOINT TUBE

GENFLEX

ACCEPTABLE SYSTEMS: EZ EPDM PEEL & STICK™ SELF ADHERED

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

08/06/2026

DETAIL NO.

EZE-PS-LS-06

(800) 443-4272 www.genflex.com

NOT TO SCALE