

Product Data Sheet

FLEXWHITE™ PEEL & STICK™ COVER TAPE



Description

GenFlex FlexWhite™ Peel & Stick™ EPDM Cover Tape is a semi-cured white EPDM flashing laminated to a cured tape. FlexWhite Peel & stick EPDM flashing is specifically designed to be used in FlexWhite EPDM roofing applications to flash gravel stops and other details as specified in current GenFlex technical specifications.

Physical Properties

EPDM PROPERTY	TYPICAL VALUES
Color	White
Base	EPDM
Solids	100%
Cure State	Semi-cured
Thickness	.060" (1.5 mm) ± 10%


TAPE PROPERTY	TYPICAL VALUES
Color	White
Base	Rubber Polymer
Solids	100%
Cure State	Cured
Thickness	.025" ± .007" (.635 mm ± .18 mm)

Installation

Refer to current GenFlex Technical Specifications for additional application instructions.

IMPORTANT: Ensure both mating surfaces are free of debris and no moisture is present on the splicing surfaces.

1. Thoroughly mix GenFlex FlexWhite Clear Primer. DO NOT THIN! A minimum of 2 minutes of vigorous hand mixing with a wooden paint stirrer or its equivalent is required. All sources of ignition should be eliminated; adequate ventilation should exist.

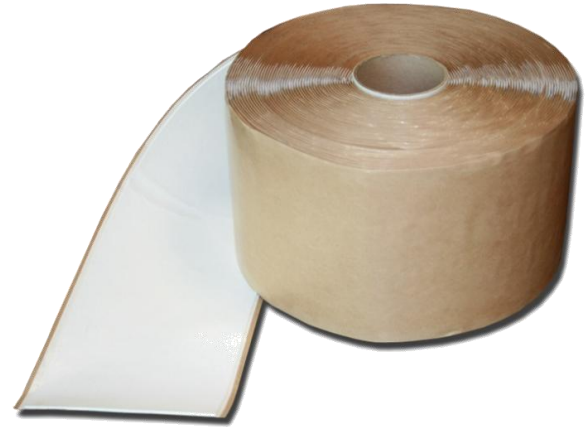

2. Clean all surfaces with a clean cotton rag removing excess contamination prior to application of the primer.
3. With a scrub pad and handle, apply GenFlex FlexWhite Clear Primer to the membrane and metal flange using long and continuous back and forth strokes with heavy to moderate pressure along the bonding area until no streaks or puddling occurs.
4. Allow GenFlex FlexWhite Clear Primer to dry until slightly tacky to a dry finger touch.
5. Peel the release paper from the tape and wrap around the roll one revolution. Center the tape over the area to be covered. Unroll the tape and remove the release paper in a continuous motion.
6. Using Teflon coated or hard rubber roller, hand-roll the flashing firmly to ensure uniform contact. Pay special attention to any factory seam step downs and field seam intersections.
7. Apply a continuous "high profile" bead of FlexWhite Edge Caulk at field seam intersections, Cover Tape end laps and edge metal joints per current specifications.

Product Data

SIZE	QUANTITY	PRODUCT #
6" x 100' (152.4 mm x 30.5 m)	2 Rolls per Carton	W590030106
Scrub Pads and Handles are included in each carton		

Product Data Sheet

FLEXWHITE™ PEEL & STICK™ COVER TAPE



LEED Information

Recycled Content

Post Consumer	0%
Post Industrial	0%

Storage

Store indoors in original unopened containers at a temperature between 60 °F and 80 °F (16 °C and 27 °C) for maximum shelf life. Do not store on roof in direct sunlight. When exposed to lower temperatures, restore to room temperature prior to use.

Shelf Life

6 months; shelf life will be shortened if exposed to elevated temperatures.

Precautionary Data

To avoid sources of punctures and physical damage, take care when moving, transporting, or handling.

Contact GenFlex Roofing Systems Technical Department for specific recommendations.

Refer to Material Safety Data Sheet for additional information.