


GENFLEX Peel & Stick™ EPDM Flashing

Item Description

7" x 100' (304.8 mm x 35 mm)
9" x 50' (178 mm x 17.5 m)
9" x 25' (178 mm x 8.8 m)

Item Number

W590010069
W590010145
W590010169

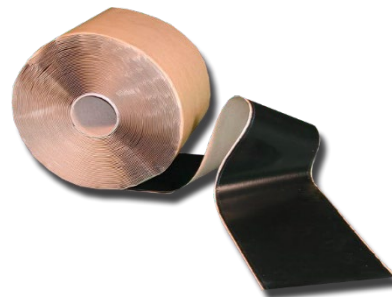

Product Information

Description

GenFlex Peel & Stick EPDM Flashing is composed of uncured EPDM membrane laminated to a cured Butyl based adhesive tape. GenFlex Peel & stick EPDM flashing is specifically designed to be used in EPDM roofing applications for flashing pipes, inside corners, outside corners, and any application where uncured EPDM is required.

Typical Properties	
EPDM Property	Typical Values
Color	Black
Base	EPDM
Solids	100%
Cure State	Uncured
Thickness	.065" ± 0.005" (1.6 mm ± .13 mm)

Typical Properties	
Tape Property	Typical Values
Color	Black
Base	Butyl
Solids	100%
Cure State	Cured

Installation

1. Thoroughly mix GenFlex Clear Primer. DO NOT THIN! A minimum of 2 minutes of vigorous hand mixing with a wooden paint stirrer or its equivalent is required. All sources of ignition should be eliminated; adequate ventilation should exist.
2. Clean all surfaces with a clean cotton rag removing excess contamination to application of the primer.
3. With a scrub pad and handle, apply GenFlex Clear Primer using long and continuous back and forth strokes with heavy to moderate pressure along the bonding area until no streaks or puddling occur.
4. Allow GenFlex Clear Primer to dry until slightly tacky to a dry finger touch.
5. Cut the Peel & Stick Flashing to the desired size.
6. Peel off the release paper from the flashing and apply it to the primed area using care not to over stretch or thin out the flashing material.
7. Using Teflon coated or hard rubber roller, hand-roll the flashing firmly to ensure uniform contact. Pay special attention to any factory seam step downs and field seam intersections.
8. Apply a continuous "high profile" bead of Edge Caulk at all overlaps and field seam intersections, Cover Tape end laps, and edge metal joints. All caulking details will be completed per standard specifications with GenFlex Edge Caulk.

Product Data

Tape Roll Size	Contents	Product #
7" x 100' (304.8 mm x 35 mm)	2 Rolls per Carton; 40 Cartons per Pallet	W590010069
9" x 50' (178 mm x 17.5 m)	2 Rolls per Carton; 40 Cartons per Pallet	W590010145
9" x 25' (178 mm x 8.8 m)	1 Roll per Carton	W590010169

*LEED® Information

Recycled Content

Post Consumer 0%

Post Industrial 0%

*NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

Storage

- Store in original unopened container indoors at temperatures between 60 °F (16 °C) and 80 °F (27 °C).
- Do not store on roof in direct sunlight or at temperatures above 100 °F (38 °C).
- When exposed to lower temperatures, restore to room temperature prior to use.
- Do not store on roof in direct sunlight or at temperatures above 100 °F (38 °C).
- When exposed to lower temperatures, restore to room temperature prior to use.

Shelf Life

12 months; shelf life will be shortened if exposed to elevated temperatures.

Precautionary Data

- To avoid sources of punctures and physical damage, take care when moving, transporting, or handling.
- Contact GenFlex Roofing Systems Technical Department for specific recommendations.
- Refer to the Safety Data Sheet for additional information.

Please contact GenFlex Technical Services at 1-800-443-4272 option 1, for further information.

This sheet is meant to highlight GenFlex products and specifications and is subject to change without notice. GenFlex takes responsibility for furnishing quality materials which meet published GenFlex product specifications. Neither GenFlex nor its representatives practice architecture. GenFlex offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. GenFlex accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No GenFlex representative is authorized to vary this disclaimer.