

WARRANTY MEMBRANE REQUIREMENTS:

15-YEAR


TPO - 45 MIL

20-YEAR

TPO - 60 MIL

NOTE:

1. REFER TO THE GENFLEX™ WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO DETAIL EZT-LS-01 OR EZT-LS-02 FOR WELD WIDTH.
3. T-JOINT COVER REQUIRED FOR 60 MIL MEMBRANE OR GREATER.
4. EZ TPO NON-REINFORCED FLASHING (4" x 4" (101.6 mm x 101.6 mm) MIN. WITH ROUNDED CORNERS) MAY BE USED IN LIEU OF T-JOINT COVER FOR A MAXIMUM OF 20 YEARS.
5. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED, REFER TO EZT-LS-14 FOR CUT EDGE SEALANT APPLICATION.

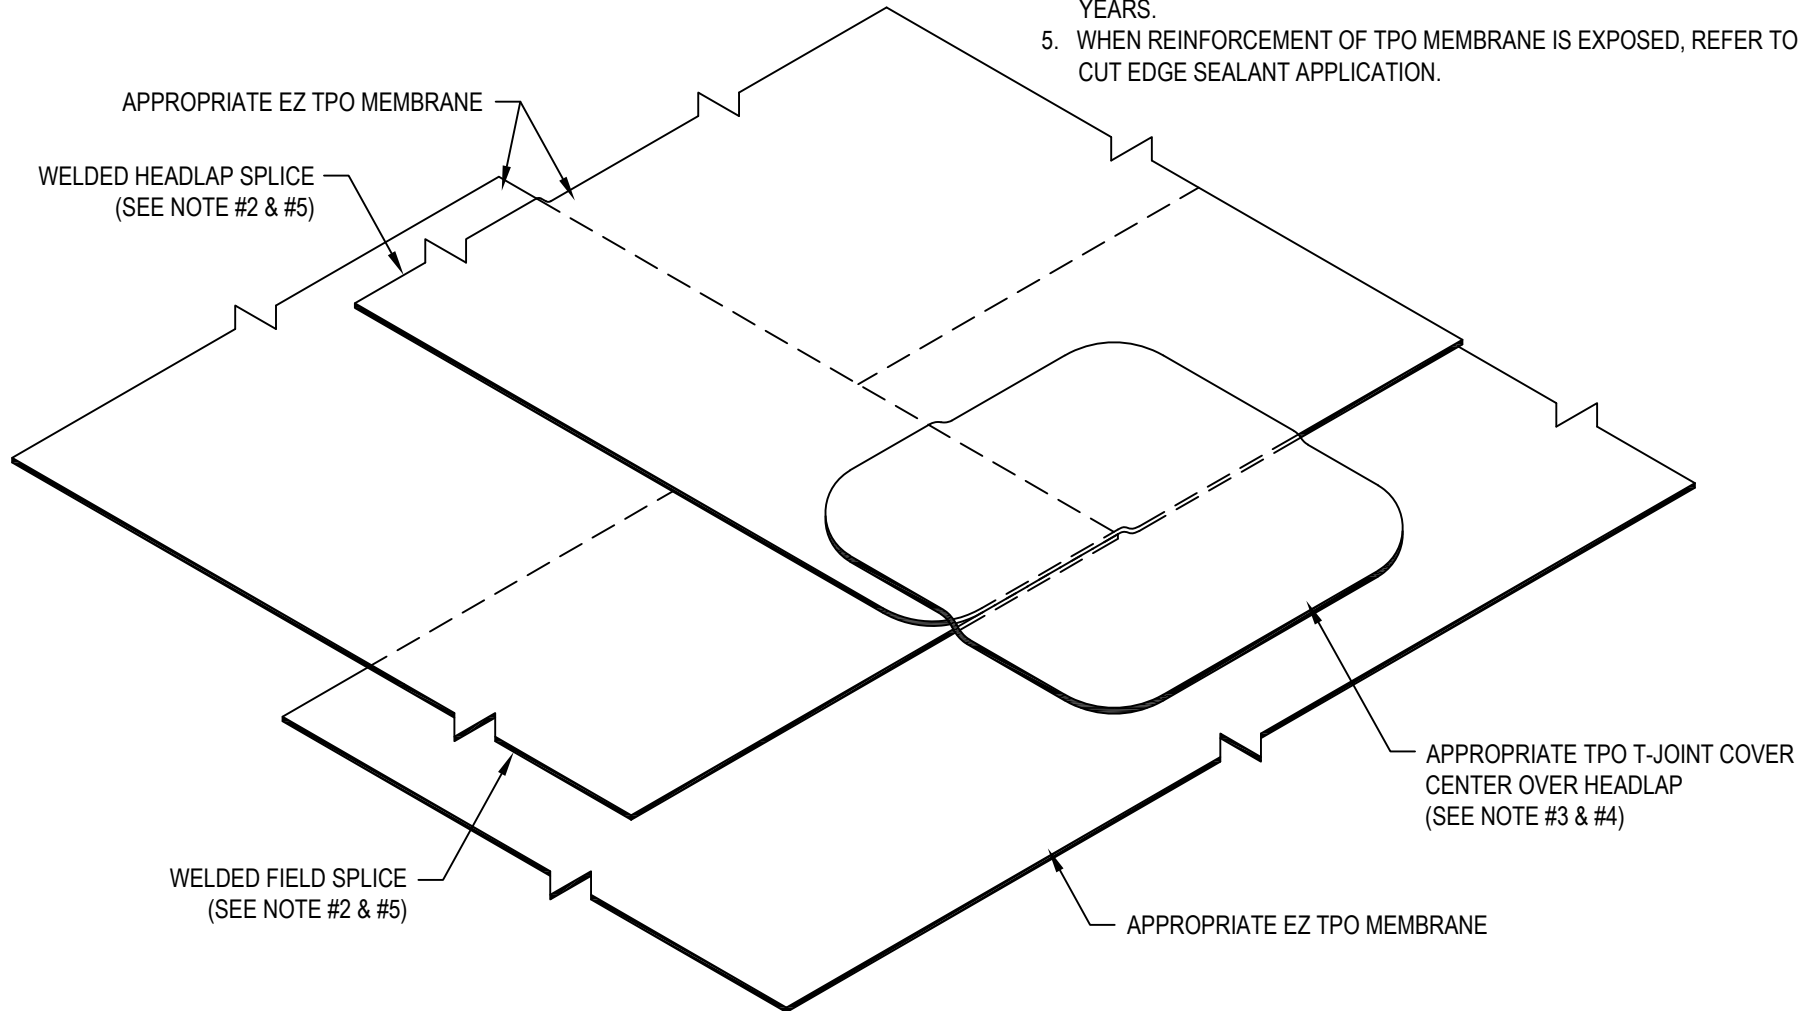

**LAP SPLICE WITH HEADLAP OVER FIELD SEAM
USING WELDED T-JOINT COVER**

MATERIAL: EZ TPO

ACCEPTABLE SYSTEMS: ALL

MAXIMUM WARRANTY: 20 Years

ISSUE / REVISION
DATE:

04/20/2026

DETAIL NO.

EZT-LS-08

NOT TO SCALE

GENFLEX: (800) 443-4272 www.genflex.com